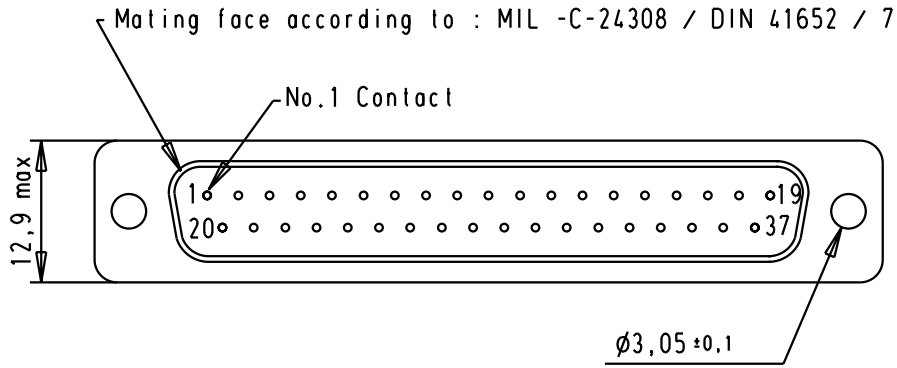



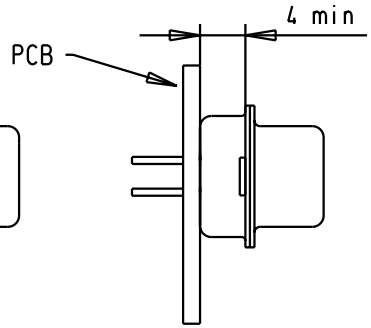

Assembly position

SPECIFICATION

Mating Cycles	200
Capacitance	3900pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	6dB
10	11dB
50	25dB
100	35dB
500	35dB
1000	32dB

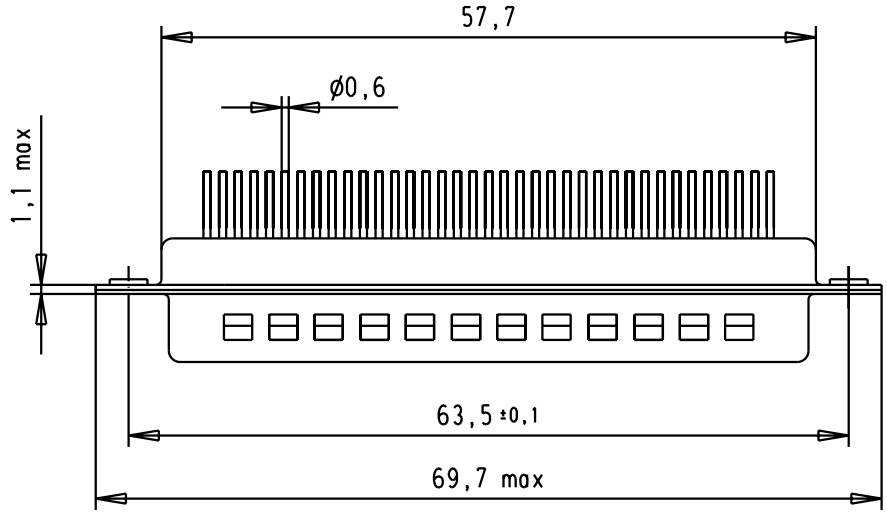

PCB Layout
Component side

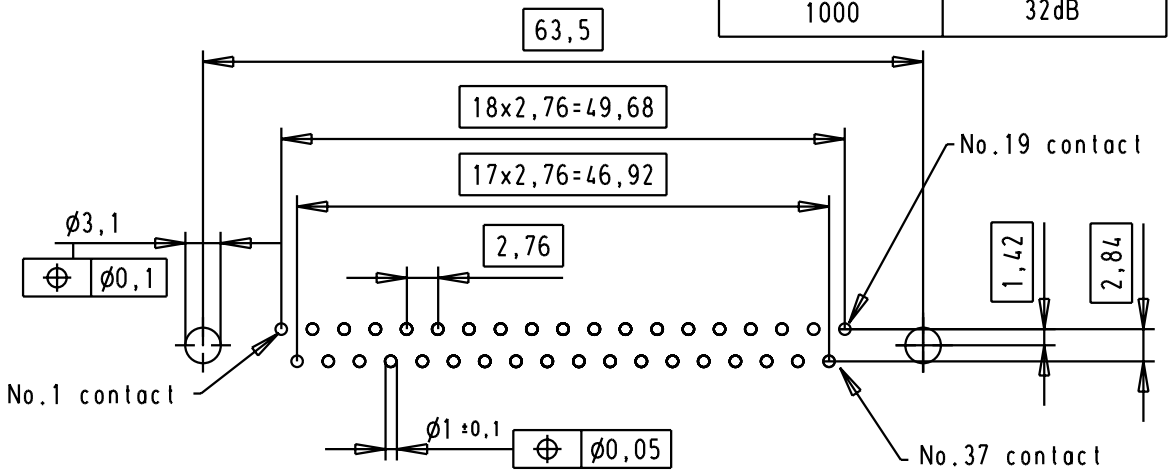

				Dat.	Name
			Detail.	8-JUL-02	CV
			Insp.		
			Stand.		
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, straight, 37 Poles, with turned solder pin and hole

Ma?Mstab/ Scale: 1.5:1

HARTING EURL
F-95972 Paris

TB 09644227240

Sub.

Blatt/ Page 1/1