

5

4

3

2

1


Nut thread

2,77

RECOMMENDED PANEL CUTOUT DIMENSIONS

Values are taken from the
CECC 75 301-802

	A±0.2	B±0.13	C±0.2
front mount	44,3	47	12,3
rear mount	42.5	47	11,4

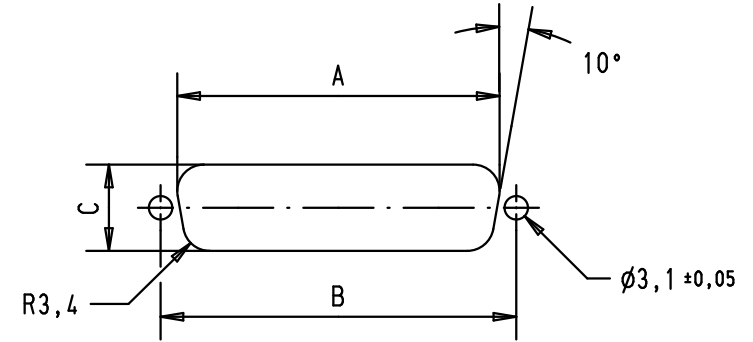

12,55 ± 0,38

7,9 ± 0,25

47,04 ± 0,13


53,09 ± 0,25

2,84

38,14

20,65 pre crimping position

18,20 after crimping position



1.27 mm pitch flat cable stranded, wire sizes : AWG 26 to 28

09 66 318 7502

PL3

4-40 UNC

09 66 318 6502

PL2

4-40 UNC

09 66 318 7501

PL3

M3

09 66 318 6501

PL2

M3

part number

performance
level

Nut thread

EC01902

21-MA-10

SC

29756

19-MAR-02

CV

Mod.

Dot.

Name

Dot.

Name

Detail. 19-MAR-02

CV

Insp.

Stand.



All Dim. in mm
Orig. Size DIN A 4

D-sub, female, 25 poles,
straight, IDC,
nut fixing

Maßstab/
Scale

1 : 1

HARTING EURL
F-95972 Paris



TB 09 66 318 x50x

Sub.

Blatt/ Page

1

1