
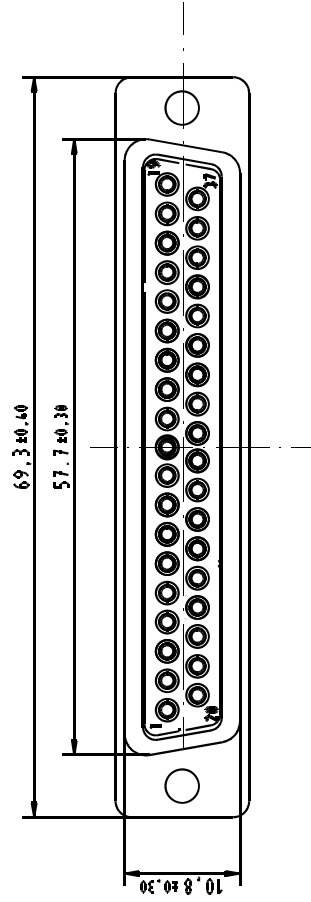
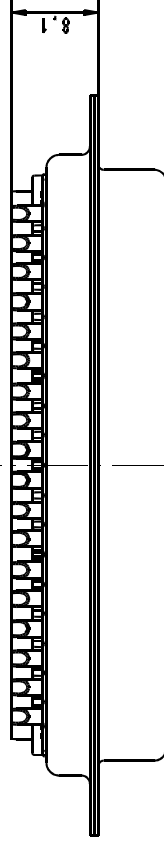


Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75.01-802

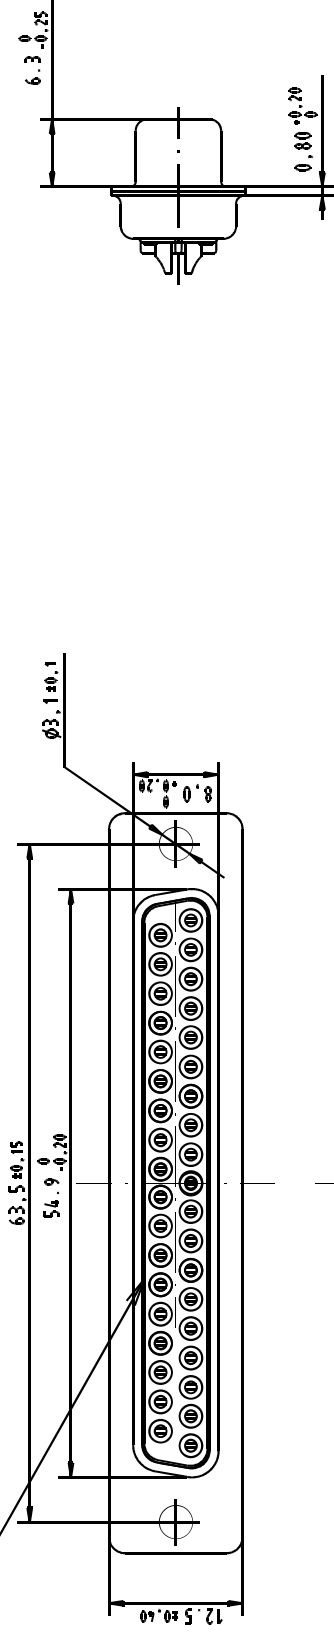

1) Protection standard IP 67 according to IEC 529 / DIN 40050.

2) Cable: AWG 20 max

	09 67 437 4715	Au plating 0,76 μ m mini
	Part Number	Performance Level

[illegible]