


Specification Sheet

Part Number: 151-01999

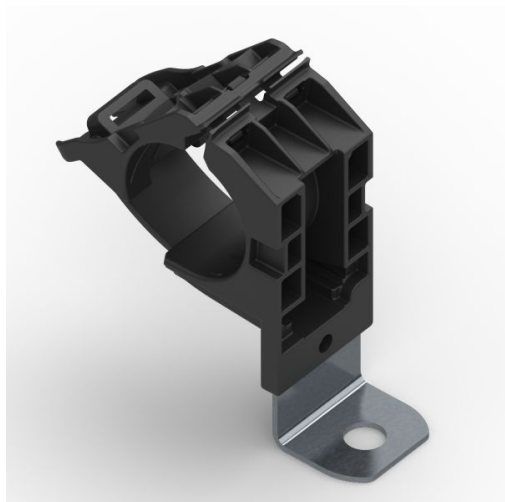

Ratchet P-Clamp, 0.76 - 1.42" Bundle Dia, 90° Short, .26" Hole Dia, PA66HIRHSUV/SS304, Black, 160/ctn

Article Number	151-01999
-----------------------	-----------

Type	RCC90SM6SS
-------------	------------

Color	Black (BK)
--------------	------------

Features & Benefits	<ul style="list-style-type: none">• One-piece ratchet closure allows for easy installation during pre- or final assembly.• Easy release feature simplifies quick adjustments and maintenance.• Impact modified, heat and UV stabilized PA66 provides long-term durability, indoors and out.• Stainless-steel mounting plate tolerates high torque and provides superior corrosion resistance against chemicals, salt spray and contact with dissimilar metals.• Angled mounting plates are ideal for stacking RPCs or for avoiding obstructions or heat sources.
--------------------------------	--

Quantity Per	carton
---------------------	--------

Product Description	The Ratchet P-Clamp family offers versatility when managing wires, cables and hoses. The robust design and durable materials make it ideal for heavy duty applications, both indoors and out. The one-piece adjustable clamp can be closed by hand to the desired diameter. The release feature provides easy and nondestructive removal of cables simply by using a flat-head screwdriver. This nondestructive release allows the clamp to be reused without removing or replacing any bolts or screws.		
Short Description	Ratchet P-Clamp, 0.76 - 1.42" Bundle Dia, 90° Short, .26" Hole Dia, PA66HIRHSUV/SS304, Black, 160/ctn		
Global Part Name	RCC90SM6SS-PA66HIRHSUV/SS304-BK		
Minimum Tensile Strength (Imperial)	100.0		
Minimum Tensile Strength (Metric)	445.0		
Length L (Imperial)	5.58		
Length L (Metric)	141.8		
Fixation Method	Screw Mounting		
Variant	Short		
Width W (Imperial)	1.37		
Width W (Metric)	34.9		
Bundle Diameter Min (Imperial)	0.76		
Bundle Diameter Min (Metric)	19.4		

Bundle Diameter Max (Imperial)	1.42
Bundle Diameter Max (Metric)	36.0
Cable Tie Width Max (Imperial)	0.52
Cable Tie Width Max (Metric)	13.2
Mounting Hole Diameter D (Imperial)	0.256
Mounting Hole Diameter D (Metric)	6.5 mm
Mounting Hole Diameter D Max (Metric)	6.5
Stud Diameter (Metric)	M6
Mounting Hole Centers (Imperial)	1.57

Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) Stainless Steel (SS304)
-----------------	--

Material Shortcut	SS304 PA66HIRHSUV
--------------------------	-------------------

Flammability	UL 94 HB
---------------------	----------

UV Resistant (Yes/No)	Yes
------------------------------	-----

Operating Temperature (Metric)	-40°F to +221°F (-40°C to +105°C)
---------------------------------------	-----------------------------------

ROHS Complaint	Yes
-----------------------	-----

UL Listed (US and Canada)	Yes
----------------------------------	-----

UL Listed (US	Yes
----------------------	-----

Package Quantity(Imperial)	160
-----------------------------------	-----

Package Quantity (Metric)	160
----------------------------------	-----

Customs Number	3926909988
-----------------------	------------

© 2020 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)