


Specification Sheet

Part Number: 157-00172

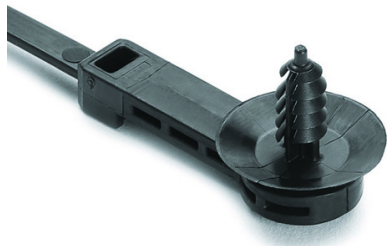

1-Piece Cable Tie/Fir Tree Mount, 25mm Offset, 9.1" Long, M6 Hole, 50lb, PA66HIRHSUV, Black, 500/pkg

Article Number 157-00172

Type T50ROSFTM6SO25B

Color Black (BK)

Features & Benefits

- One-piece cable tie and fixing offers a simple and easy to use method of bundling and fixing cables, through the design of the fir tree by ensuring positive and secure fixing into panels with thicknesses from 0.6-6.65mm.
- The offset on the cable tie creates an alternate solution when an offset fixing option is required and a tape clip cannot be used due to the design which reduces the potential of the bundle flexing or shifting.
- The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Quantity Per carton

Product Description	HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.
Short Description	1-Piece Cable Tie/Fir Tree Mount, 25mm Offset, 9.1" Long, M6 Hole, 50lb, PA66HIRHSUV, Black, 500/pkg
Global Part Name	T50ROSFTM6SO25B-PA66HIRHSUV-BK
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	9.1
Length L (Metric)	230.0
Offset Length(Imperial)	0.98
Offset Length(Metric)	25.0
Fixation Method	Fir Tree
Identification Plate Position	none
Releasable Closure	No
Width W (Imperial)	0.75
Width W (Metric)	4.6

Bundle Diameter Min (Imperial)	0.08
Bundle Diameter Min (Metric)	2.0
Bundle Diameter Max (Imperial)	1.97
Bundle Diameter Max (Metric)	50.0
Height H (Imperial)	0.86
Height H (Metric)	21.8
Panel Thickness Min(Imperial)	0.02
Panel Thickness Max(Imperial)	0.22
Panel Thickness Min (Metric)	0.60
Panel Thickness Max (Metric)	5.50
Mounting Hole Diameter D (Imperial)	0.24 x 0.48 " 0.25 x 0.50 " 0.25 x 0.51 " 0.27 x 0.47
Mounting Hole Diameter D (Metric)	6.5 x 12.5 mm 7.0 x 12.0 mm 6.5 x 13.0 mm 6.2 x 12.2 mm
Mounting Hole Diameter D Min (Imperial)	0.24
Mounting Hole Diameter D Max (Imperial)	0.24
Mounting Hole Diameter D Max (Metric)	6.0
Disc Diameter (Imperial)	0.75

Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV)
Material Shortcut	PA66HIRHSUV
Operating Temperature (Metric)	-40°F to +221°F (-40°C to +105°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Package Quantity(Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988
Content Unit(BMEcat)	pcs.