


## Specification Sheet

Part Number: 170-20600

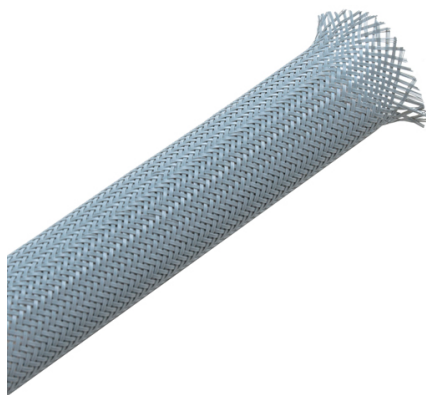

Helagaine Braided Sleeving, 6 mm Dia, PA66,GY, 328ft/Reel

**Article Number** 170-20600

**Type** HEGPA6606

**Color** Gray (GY)

**Features & Benefits**

- Nylon monofilament construction weave offers a tight braid that provides full coverage but will not rot or retain moisture.
- Material performs well in wet applications and where abiding substrate has a smooth surface.

**Quantity Per** metre

**Product Description** Helagaine Nylon Polyamide Expandable Braided Sleeving is a pliable yet durable sleeve that protects against cuts, abrasion and excessive wear caused by repetitive motion.

**Short Description** Helagaine Braided Sleeving, 6 mm Dia, PA66,GY, 328ft/Reel

|                                       |                      |
|---------------------------------------|----------------------|
| <b>Global Part Name</b>               | HEGPA6606-PA66-GY    |
| <b>Length L (Imperial)</b>            | 328.0                |
| <b>Length L (Metric)</b>              | 100.0                |
| <b>Bundle Diameter Min (Imperial)</b> | 0.16                 |
| <b>Bundle Diameter Min (Metric)</b>   | 4                    |
| <b>Bundle Diameter Max (Imperial)</b> | 0.32                 |
| <b>Bundle Diameter Max (Metric)</b>   | 8                    |
| <b>Diameter D (imperial)</b>          | 0.24                 |
| <b>Diameter D (metric)</b>            | 6.1                  |
| <b>Nominal Diameter (Imperial)</b>    | 0.25                 |
| <b>Nominal Diameter (Metric)</b>      | 6                    |
| <b>Material</b>                       | Polyamide 6.6 (PA66) |
| <b>Material Shortcut</b>              | PA66                 |
| <b>Flammability</b>                   | FMVSS 302 UL 94 V2   |

|  |                                      |
|--|--------------------------------------|
| <b>Halogen free</b>                    | Yes                                  |
| <b>Operating Temperature (Metric)</b>  | -76°F to +302°F (-60°C to +150°C)    |
| <b>Reach Complaint(Article 33)</b>     | Yes                                  |
| <b>ROHS Complaint</b>                  | Yes                                  |
| <b>Certification/Specification WEB</b> | RST LAB   DIN EN [45545-2] (02/2016) |
| <b>Package Quantity(Imperial)</b>      | 328                                  |
| <b>Package Quantity (Metric)</b>       | 100                                  |
| <b>Customs Number</b>                  | 5808100000                           |
| <b>Content Unit(BMEcat)</b>            | metre                                |
| <b>Weight (Metric)</b>                 | 0.59                                 |
| <b>Weight (Imperial)</b>               | 1.3                                  |