


## Specification Sheet

Part Number: 184-15302

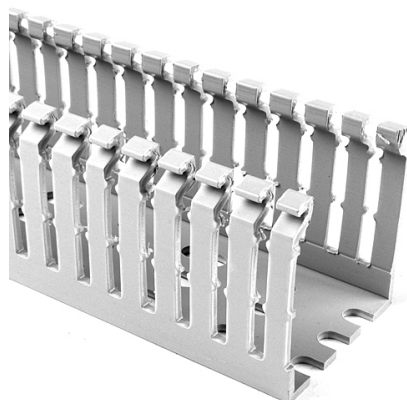

High Density Slotted Wall Wiring Duct, 1.5" x 3", Non-Adhesive, PVC, Gray, 120ft/Carton

<b>Article Number</b>	184-15302
-----------------------	-----------

<b>Type</b>	SLHD1.5X3
-------------	-----------

<b>Color</b>	Gray (GY)
--------------	-----------

<b>Features &amp; Benefits</b>	<ul style="list-style-type: none"><li>• Narrow fingers reduce fanning of the wires to the terminal blocks, presenting a neater appearance.</li><li>• Each finger is provided with a double restriction to hold wires in the bottom portion of the duct, allowing for easier installation.</li><li>• Mounting holes are uniform in size and are offered every 2 inches to accommodate compact designs and ease installation.</li><li>• Optional covers snap on and off easily, and are provided with a non-slip lining that insures the covers remain in place during vibration.</li></ul>
--------------------------------	---

<b>Quantity Per</b>	carton
---------------------	--------

<b>Product Description</b>	HellermannTyton Pro-Duct High-Density, Slotted-Wall Wiring Duct features narrow fingers equaling a 2 to 1 finger ratio compared to standard slotted wiring duct. With the narrow fingers, compact designs and components are more easily accommodated.
<b>Short Description</b>	High Density Slotted Wall Wiring Duct, 1.5" x 3", Non-Adhesive, PVC, Gray, 120ft/Carton
<b>Global Part Name</b>	SLHD1.5X3-PVC-GY
<b>Technical Description</b>	Non-Adhesive
<b>Length L (Imperial)</b>	6.0
<b>Length L (Metric)</b>	1.83
<b>Width W (Imperial)</b>	1.5
<b>Width W (Metric)</b>	38.1
<b>Height H (Imperial)</b>	3.07
<b>Height H (Metric)</b>	77.9
<b>Mounting Hole Centers (Imperial)</b>	2.0
<b>Material</b>	Polyvinylchloride (PVC)
<b>Material Shortcut</b>	PVC

<b>Flammability</b>	Self-Extinguishing
<b>Halogen free</b>	No
<b>Operating Temperature (Metric)</b>	+122°F (+50°C)
<b>Reach Complaint(Article 33)</b>	No
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	CSA EN 50085-1:2005 + A1:2013 EN 50085-2-3_1A UL
<b>UL Recognized (US)</b>	Yes
<b>Package Quantity(Imperial)</b>	120
<b>Package Quantity (Metric)</b>	36.58
<b>Customs Number</b>	3925900000