


## Specification Sheet

Part Number: 553-50021

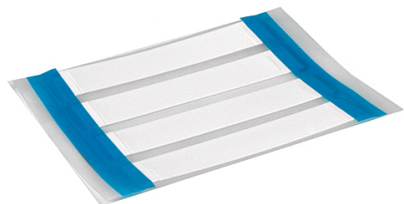

ShrinkTrak Labels, 1-Sided, Unslit, .25" (6.35mm), PO-X, Yellow, 1000/box

|                       |           |
|-----------------------|-----------|
| <b>Article Number</b> | 553-50021 |
|-----------------------|-----------|

|             |          |
|-------------|----------|
| <b>Type</b> | HTS6-2YE |
|-------------|----------|

|              |             |
|--------------|-------------|
| <b>Color</b> | Yellow (YE) |
|--------------|-------------|

### Features & Benefits

Versatile • Flexible, flame retardant, heat shrinkable polyolefin tubing meets all military specification. • 3:1 shrink ratio enables a wide range of wire sizes to be covered. • Standard colors - yellow, white and black. • Larger pack options result in less box changes. High Performance Design • Center slit and multiple slit versions reduce or eliminate hand cutting. • Nonslip printable liner allows additional marker data to be printed on the reverse side for records and placement instructions. • Use HellermannTyton's Durattach ribbon system for the highest print performance on the market. Reduce Printer Jams • Custom box opening allows markers to dispense directly into HellermannTyton thermal transfer printers. • Dispense markers faster and easier with waxed core dispenser.

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Quantity Per</b>              | box                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Product Description</b>       | HellermannTyton's ShrinkTrak™ heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production. |
| <b>Short Description</b>         | ShrinkTrak Labels, 1-Sided, Unslit, .25" (6.35mm), PO-X, Yellow, 1000/box                                                                                                                                                                                                                                                                                                                                              |
| <b>Global Part Name</b>          | HTS6-2YE-PO-X-YE                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Variant</b>                   | Thin-Wall                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Width W (Imperial)</b>        | 1.9                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Width W (Metric)</b>          | 48.26                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Thickness T (Imperial)</b>    | .003                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Thickness T (Metric)</b>      | .0762                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Height H (Imperial)</b>       | 0.42                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Height H (Metric)</b>         | 10.67                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Width of Liner (Metric)</b>   | 76.2                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Width of Liner (imperial)</b> | 3.0                                                                                                                                                                                                                                                                                                                                                                                                                    |

|                                       |                                                                              |
|---------------------------------------|------------------------------------------------------------------------------|
| <b>Outside Diameter OD(Imperial)</b>  | 0.25                                                                         |
| <b>Outside Diameter OD(metric)</b>    | 6.35                                                                         |
| <b>Outside Diameter Max(Imperial)</b> | 0.25                                                                         |
| <b>Outside Diameter Max (metric)</b>  | 6.35                                                                         |
| <b>Wall Thickness WT (Imperial)</b>   | 0.028                                                                        |
| <b>Wall Thickness WT (Metric)</b>     | 0.71                                                                         |
| <b>Material</b>                       | Polyolefin, cross-linked (PO-X)                                              |
| <b>Material Shortcut</b>              | PO-X                                                                         |
| <b>US MIL SPEC</b>                    | SAE-AMS-DTL-23053/5 Class 1 and 3<br>MIL-STD-202G Method 215K<br>SAE-AS81531 |
| <b>Flammability</b>                   | UL 224 VW-1                                                                  |
| <b>Halogen free</b>                   | No                                                                           |
| <b>Operating Temperature (Metric)</b> | -67°F to +275°F (-55°C to +135°C)                                            |
| <b>Reach Complaint(Article 33)</b>    | Yes                                                                          |
| <b>ROHS Complaint</b>                 | Yes                                                                          |

|                                        |                                                                                |
|----------------------------------------|--------------------------------------------------------------------------------|
| <b>Certification/Specification WEB</b> | SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1<br>SAE - AS81531 |
|----------------------------------------|--------------------------------------------------------------------------------|

|                                   |      |
|-----------------------------------|------|
| <b>Package Quantity(Imperial)</b> | 1000 |
|-----------------------------------|------|

|                                  |      |
|----------------------------------|------|
| <b>Package Quantity (Metric)</b> | 1000 |
|----------------------------------|------|

|                             |      |
|-----------------------------|------|
| <b>Content Unit(BMEcat)</b> | pack |
|-----------------------------|------|

|                          |   |
|--------------------------|---|
| <b>Labels per Column</b> | 1 |
|--------------------------|---|

|                       |   |
|-----------------------|---|
| <b>Labels per Row</b> | 3 |
|-----------------------|---|

|                        |       |
|------------------------|-------|
| <b>Weight (Metric)</b> | 0.793 |
|------------------------|-------|

|                          |      |
|--------------------------|------|
| <b>Weight (Imperial)</b> | 1.73 |
|--------------------------|------|