


## Specification Sheet

Part Number: 596-00792

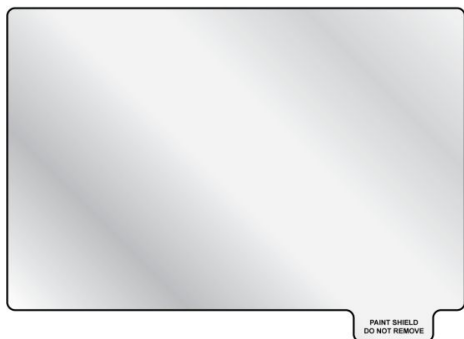

Peel-Off Paint Shield, UV Stable, 3.6" x 2.38", PET, Clear, 10/pkg

**Article Number**

596-00792

**Type**

PAINTSHIELD1

**Color**

Clear (CL)

**Features & Benefits**

- Made with UV stable inks and materials for durability and weather resistance.
- Supplied with aggressive adhesive to ensure long life.
- Meets NEC & IFC standards for printed text, character height, color and outdoor UV stability to pass inspections.
- Pre-printed labels offer significant time and cost savings over high priced engraved and lead time purchased markers.

**Quantity Per**

pack

<b>Product Description</b>	HellermannTyton offers Paint Shield laminates that can be applied over Metal Solar Placards as a barrier against unintentional painting or graffiti. Paint Shields can also be used to provide additional protection for hand-written markings using a paint pen. HellermannTyton offers several sizes of Paint Shields designed to match all sizes of Metal Solar Placards. If a Paint Shield (covering placard) has been painted over, simply remove the shield to reveal original marking. Replace shield as needed.
<b>Short Description</b>	Peel-Off Paint Shield, UV Stable, 3.6" x 2.38", PET, Clear, 10/pkg
<b>Global Part Name</b>	PAINTSHIELD1-240-CL
<b>Technical Description</b>	3.6" X 2.375" for use with 596-00829, 596-00496
<b>Width W (Imperial)</b>	3.6
<b>Width W (Metric)</b>	91.44
<b>Thickness T (Metric)</b>	64.0
<b>Height H (Imperial)</b>	2.375
<b>Height H (Metric)</b>	60.42
<b>Material</b>	Type 240, 2.0 Mil Polyester, Clear (240)
<b>Material Shortcut</b>	240
<b>Adhesive</b>	1.0 Mil Aggressive Removable

<b>Halogen free</b>	No
<b>Adhesive Operating Temperature</b>	from +50°F (from +10°C)
<b>Operating Temperature (Metric)</b>	-20°F to +302°F (-29°C to +150°C)
<b>Reach Complaint(Article 33)</b>	Yes
<b>ROHS Complaint</b>	Yes
<b>Warranty (US)</b>	Yes
<b>Package Quantity(Imperial)</b>	10
<b>Package Quantity (Metric)</b>	10
<b>Customs Number</b>	3919905060
<b>Labels per Column</b>	1
<b>Labels per Row</b>	1
<b>Weight (Metric)</b>	0.521
<b>Weight (Imperial)</b>	1.14