


Specification Sheet

Part Number: T50L1STNLM4

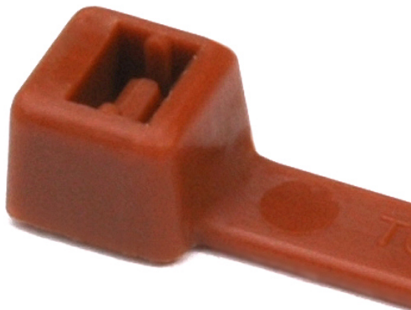

High-Temp Cable Tie, 15" Long, 50lb Tensile Strength, PA46, Brown, 1000/pkg

Article Number	111-05423
Type	T50L
Color	Brown (BN)
Features & Benefits	• Cable ties made of PA46 material provide a greater resistance to high heat exposures than PA66 heat stabilized material. • Inside serrations allow for strong grip on cables and wire bundles. • Head design provides high tensile strength with very low insertion force. • Bent tail ensures a quick and simple installation.
Quantity Per	bag

Product Description	T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.
Short Description	High-Temp Cable Tie, 15" Long, 50lb Tensile Strength, PA46, Brown, 1000/pkg
Global Part Name	T50L-PA46-BN
Minimum Tensile Strength (Imperial)	50.0
Minimum Tensile Strength (Metric)	225.0
Length L (Imperial)	15.0
Length L (Metric)	390.0
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.19
Width W (Metric)	4.8
Bundle Diameter Min (Imperial)	0.06

Bundle Diameter Min (Metric)	1.5
Bundle Diameter Max (Imperial)	4.33
Bundle Diameter Max (Metric)	110.0
Thickness T (Metric)	1.4
Material	Polyamide 4.6 (PA46)
Material Shortcut	PA46
Flammability	UL 94 V2
Operating Temperature (Metric)	-40°F to +266°F (-40°C to +130°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Package Quantity(Imperial)	1000
Package Quantity (Metric)	1000
Customs Number	3926909988
Content Unit(BMEcat)	pcs.

© 2020 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)