


## Specification Sheet

Part Number: TSRP2FW-29-1

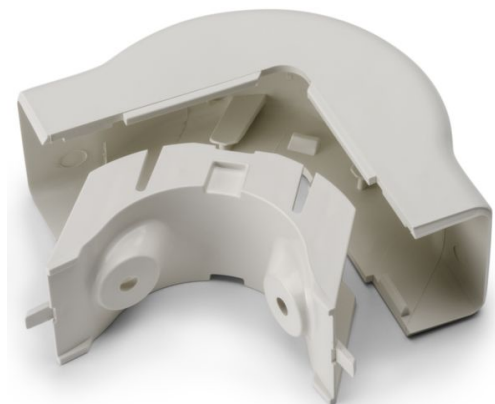

External Corner Cover, 1-1/4", 1" Bend Radius, PVC, Office White1/bag

### Article Number

250-62291

### Type

TSRP2-29-1

### Color

Office White (OEWH)

### Features & Benefits

- Tamper resistant covers with hidden latch provide security while allowing quick entry for cable maintenance.
- PVC construction is lightweight, durable and more affordable than metallic raceway systems.
- Flexible hinge designed to reduce stress cracking and discoloration from repeated opening and closing.
- Systems and fittings are available in white, office white and ivory to coordinate with a variety of décor.
- Fittings incorporate a minimum 1" bend radius to meet TIA/EIA 568-B and 569-A standards.
- TSRP power rated surface raceway systems have an enhanced "channel and lug" mating design that provides a tighter, more secure fit between raceway lengths and fittings, enabling the system to be UL Listed for power up to 600 volts and meet UL5A and CSA 22.2.

<b>Quantity Per</b>	EA
<b>Product Description</b>	<p>HellermannTyton surface raceway systems are the ideal solution for routing communication and power cables. No need to break into existing walls - raceway systems are designed to route cable along wall surfaces. Made of a PVC material, components are durable and affordable; and the one piece construction and adhesive tape backing make positioning and mounting easy. HellermannTyton offers a low voltage TSR system and a power rated TSRP system that are available in three different diameters to accommodate different cable and wire bundle and conduit sizes. Both systems include a complete line of fittings and junction boxes that allow for clean and professional installations. TSRP surface raceway systems are designed to aesthetically organize and route either power or communications cables.</p>
<b>Short Description</b>	External Corner Cover, 1-1/4", 1" Bend Radius, PVC, Office White1/bag
<b>Global Part Name</b>	TSRP2-29-1-PVC-WH
<b>Material</b>	Polyvinylchloride (PVC)
<b>Material Shortcut</b>	PVC
<b>Flammability</b>	UL 94 V0
<b>Halogen free</b>	No
<b>Operating Temperature (Metric)</b>	+122°F (+50°C)
<b>Reach Complaint(Article 33)</b>	No
<b>ROHS Complaint</b>	Yes

<b>UL Listed (US and Canada)</b>	Yes
----------------------------------	-----

<b>UL Listed (US</b>	Yes
----------------------	-----

<b>Package Quantity(Imperial)</b>	10
-----------------------------------	----

<b>Package Quantity (Metric)</b>	10
----------------------------------	----

<b>Customs Number</b>	3925900000
-----------------------	------------