



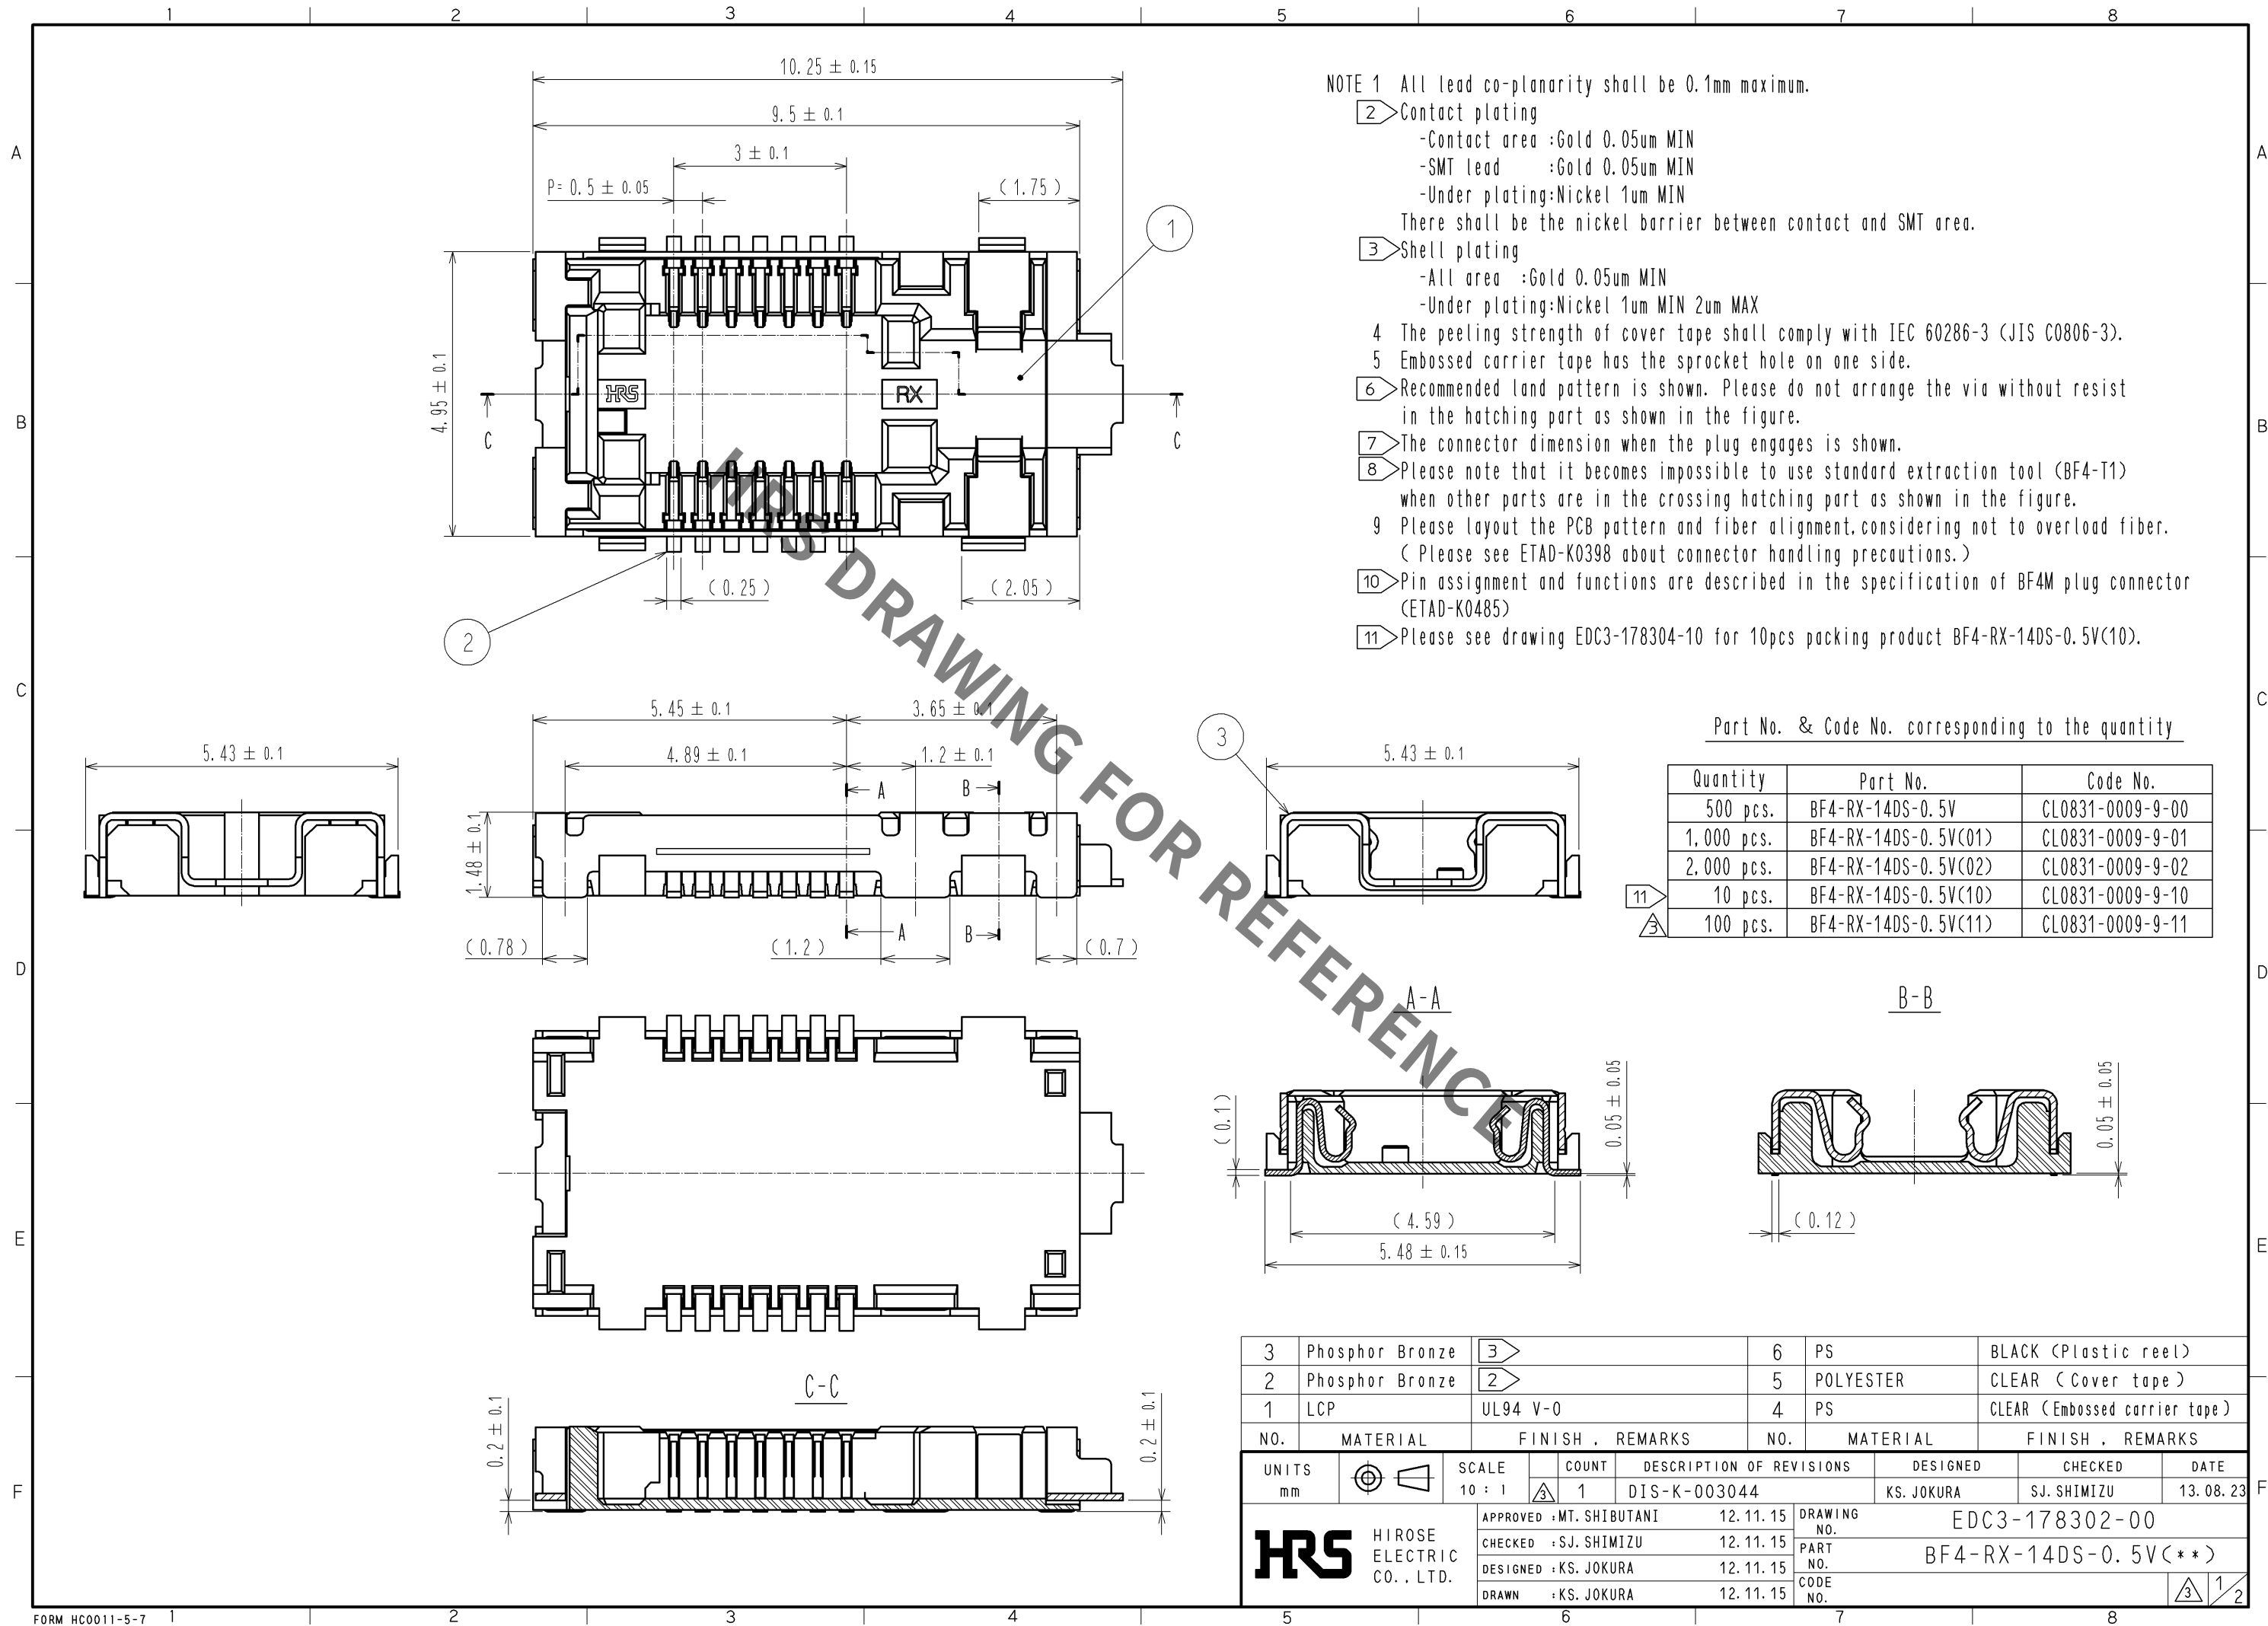


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


Dimensions of embossed carrier tape (Scale : FREE)

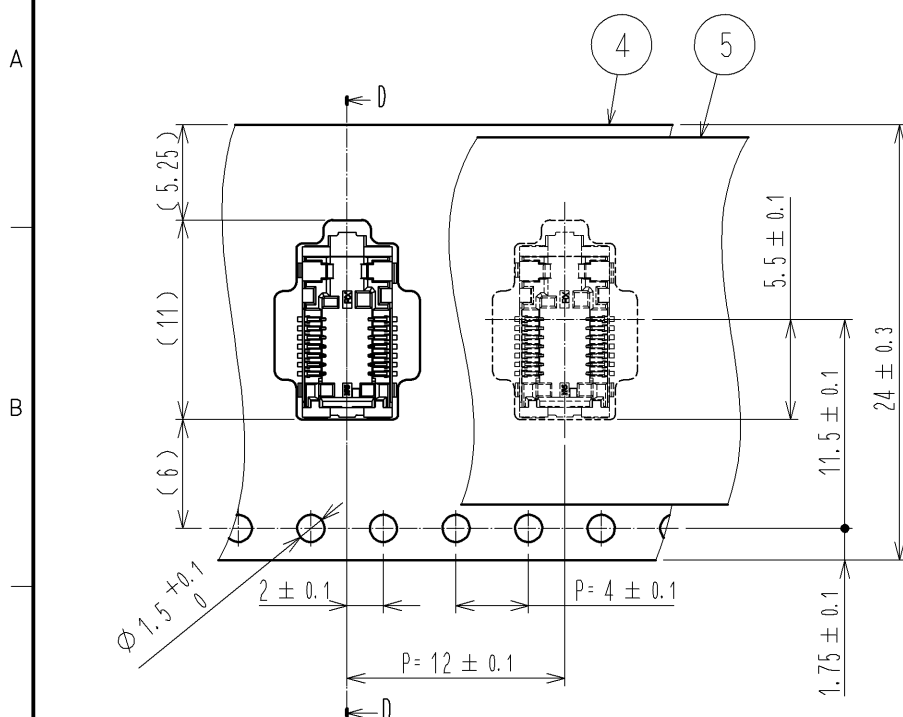


Packing reel (Scale : FREE)

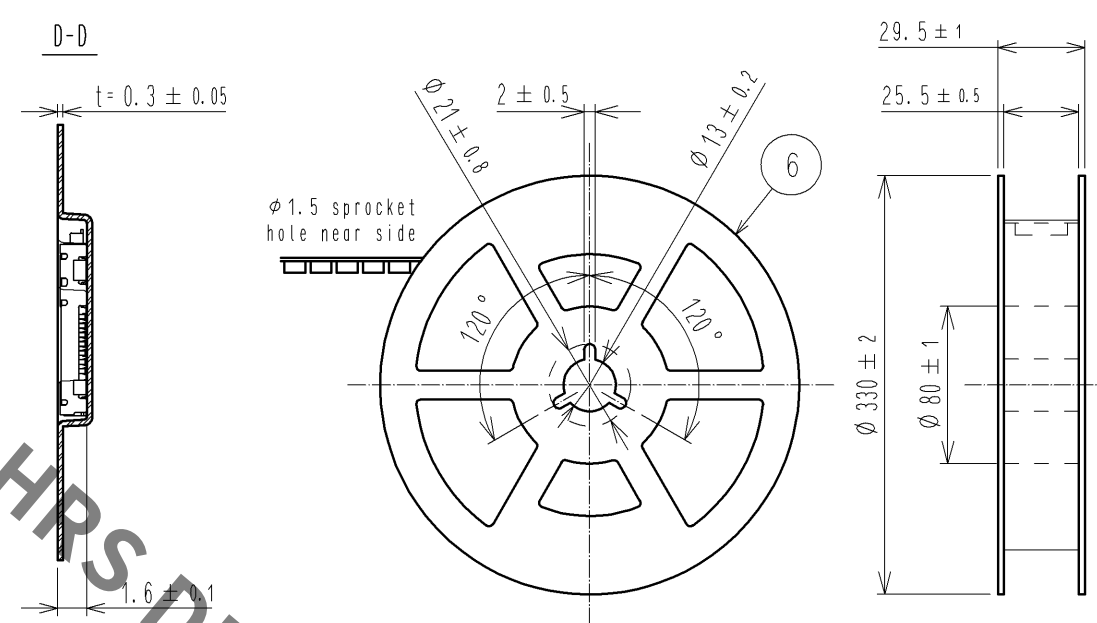


Recommended reflow temperature profile using Lead-Free solder paste.

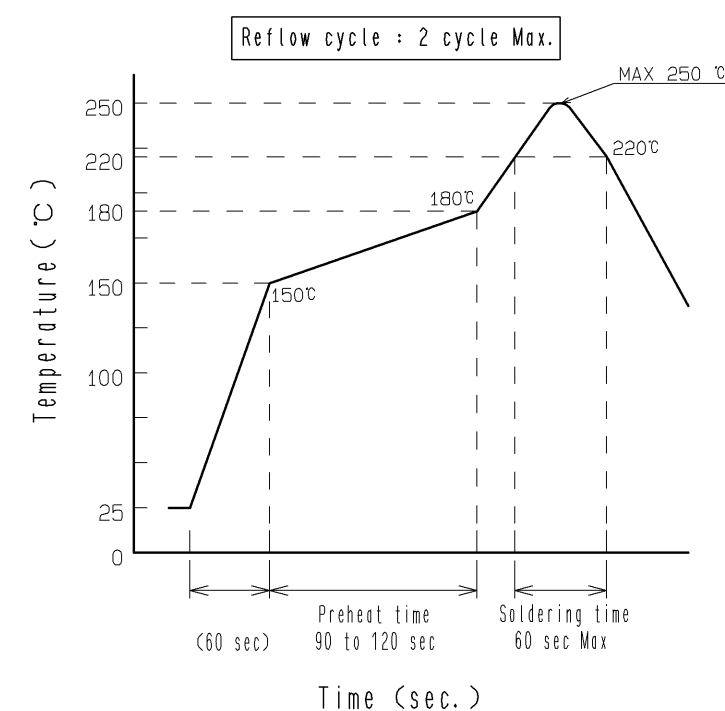


Taping direction (Scale : FREE)

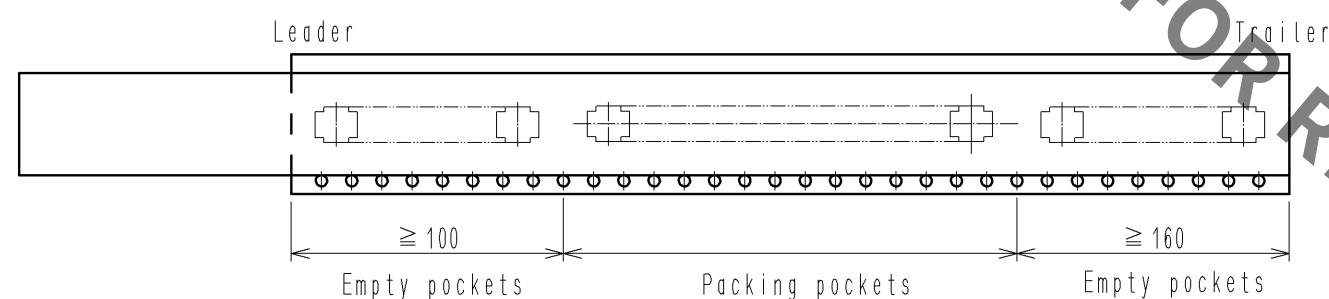



Dimensions of engaged connector (Scale:FREE)

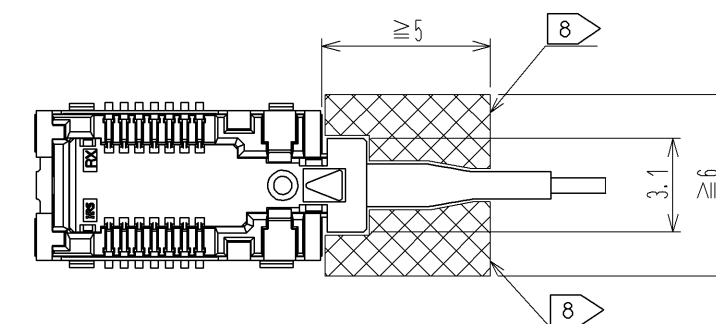

Recommended PCB land pattern

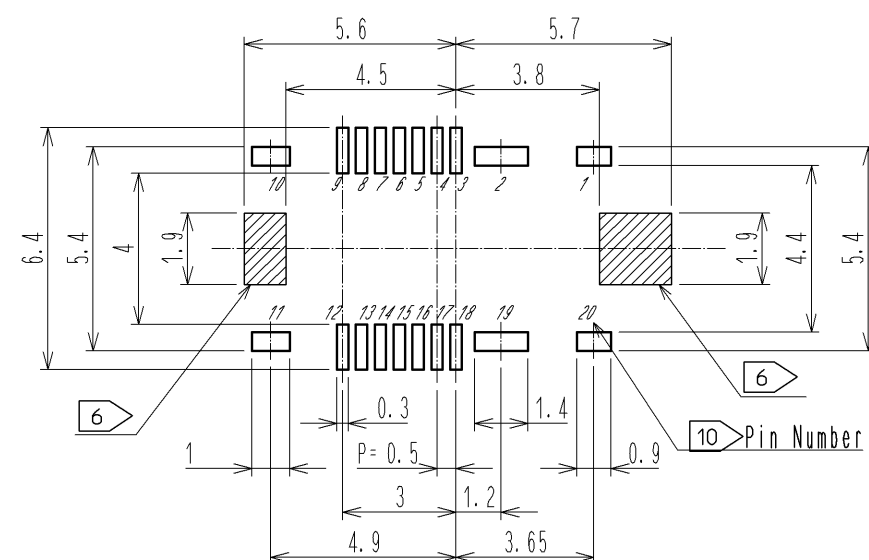

Recommended metal mask dimensions
(Mask thickness : 120 μ m)

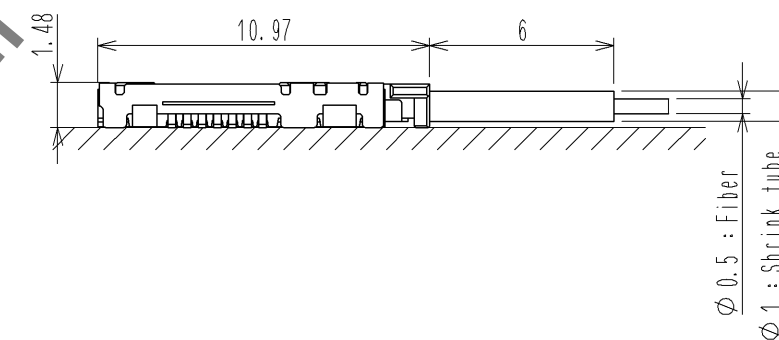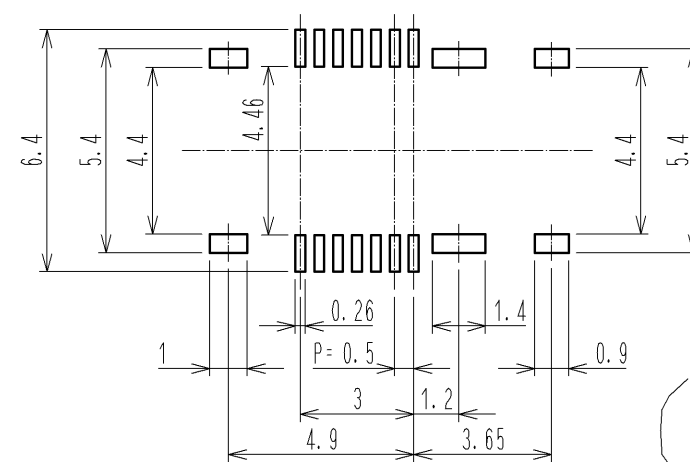

Aperture ratio
Pads mounted contacts : 70%
Pads mounted shell : 100%

HRS

DRAWING NO.	EDC3-178302-00
PART NO.	BF4-RX-14DS-0.5V(**)
CODE NO.	

3/2/2