



Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

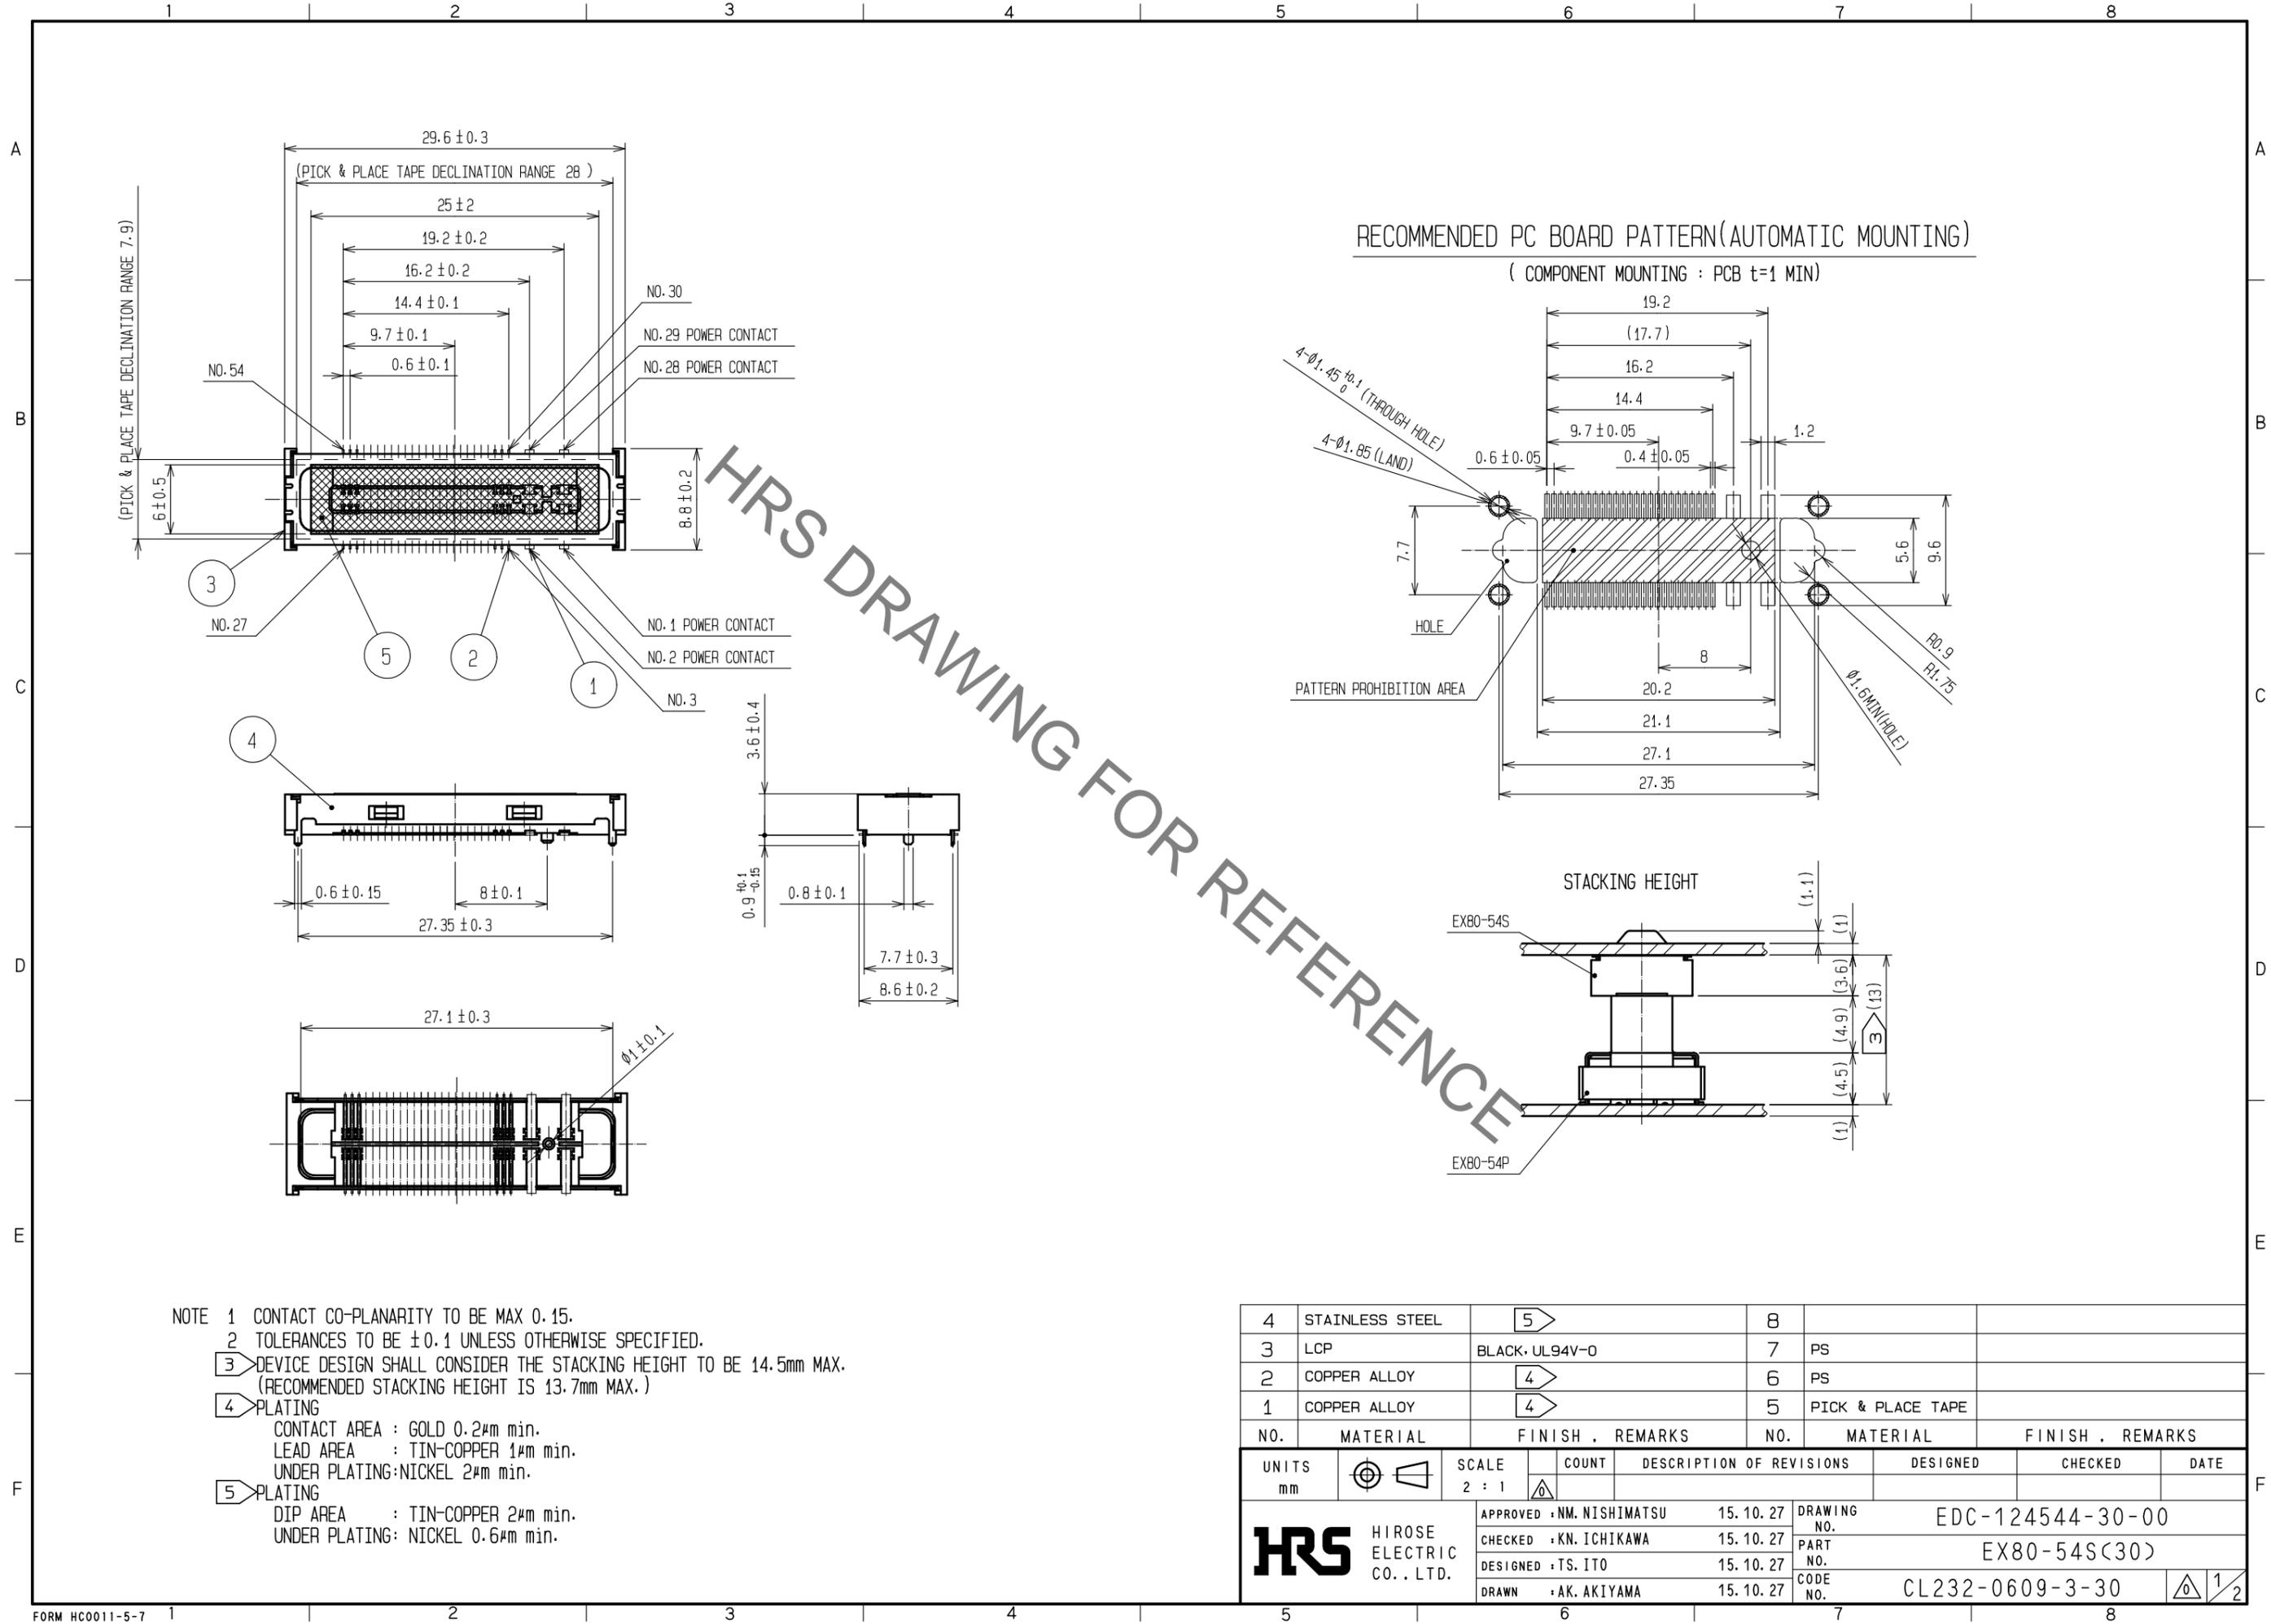

NOTE 1 CONTACT CO-PLANARITY TO BE MAX 0.15.
 2 TOLERANCES TO BE ±0.1 UNLESS OTHERWISE SPECIFIED.
 3 DEVICE DESIGN SHALL CONSIDER THE STACKING HEIGHT TO BE 14.5mm MAX.
 (RECOMMENDED STACKING HEIGHT IS 13.7mm MAX.)
 4 PLATING
 CONTACT AREA : GOLD 0.2µm min.
 LEAD AREA : TIN-COPPER 1µm min.
 UNDER PLATING: NICKEL 2µm min.
 5 PLATING
 DIP AREA : TIN-COPPER 2µm min.
 UNDER PLATING: NICKEL 0.6µm min.


4	STAINLESS STEEL	5	8		
3	LCP	BLACK, UL94V-0	7	PS	
2	COPPER ALLOY	4	6	PS	
1	COPPER ALLOY	4	5	PICK & PLACE TAPE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS
		DESIGNED	CHECKED		DATE
APPROVED : NM. NISHIMATSU			15.10.27		DRAWING NO.
CHECKED : KN. ICHIKAWA			15.10.27		PART NO.
DESIGNED : TS. ITO			15.10.27		CODE NO.
DRAWN : AK. AKIYAMA			15.10.27		
				EDC-124544-30-00	
				EX80-54S(30)	
				CL232-0609-3-30	
				1/2	

Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

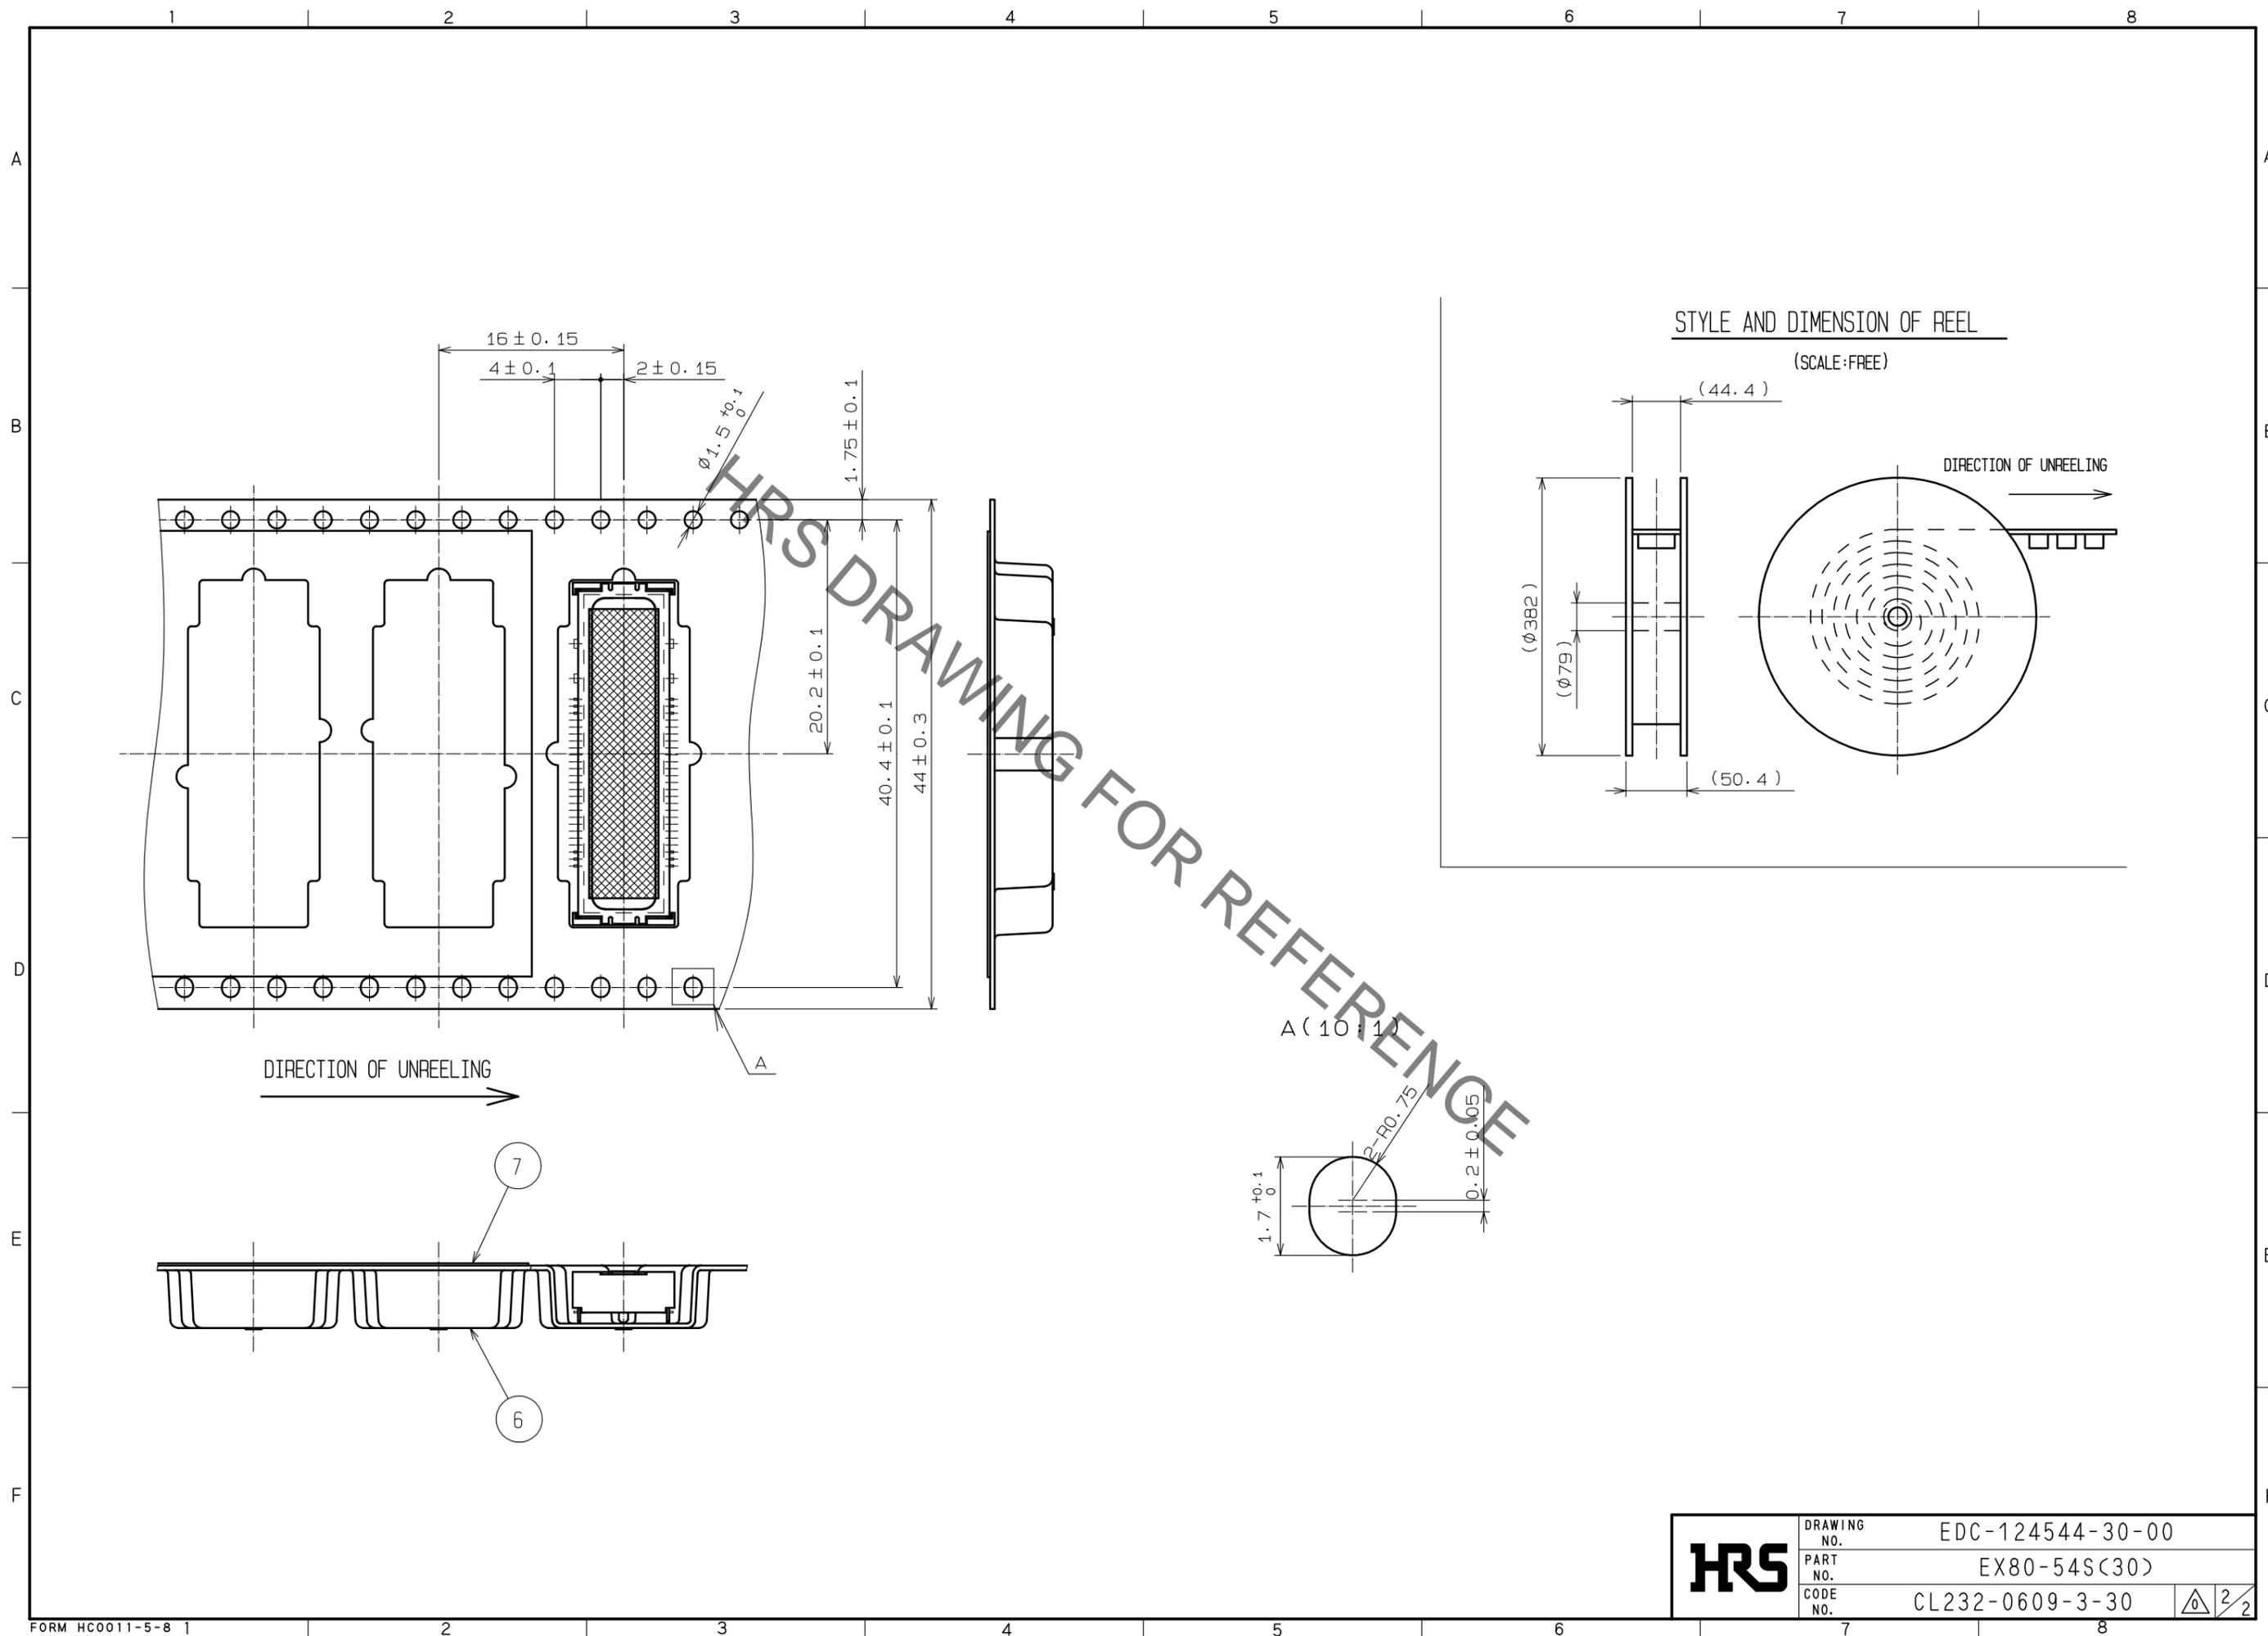


STYLE AND DIMENSION OF REEL

(SCALE:FREE)

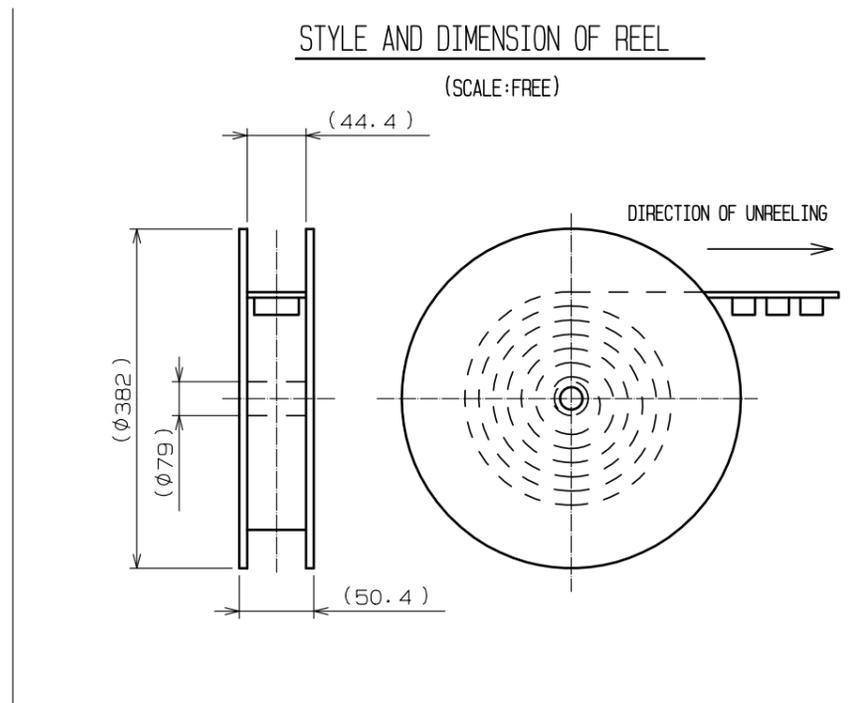

A (10:1)

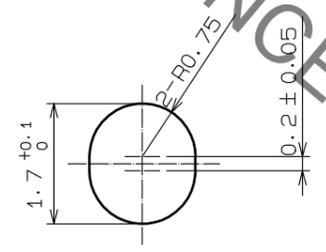

HRS	DRAWING NO.	EDC-124544-30-00	
	PART NO.	EX80-54S(30)	
	CODE NO.	CL232-0609-3-30	