
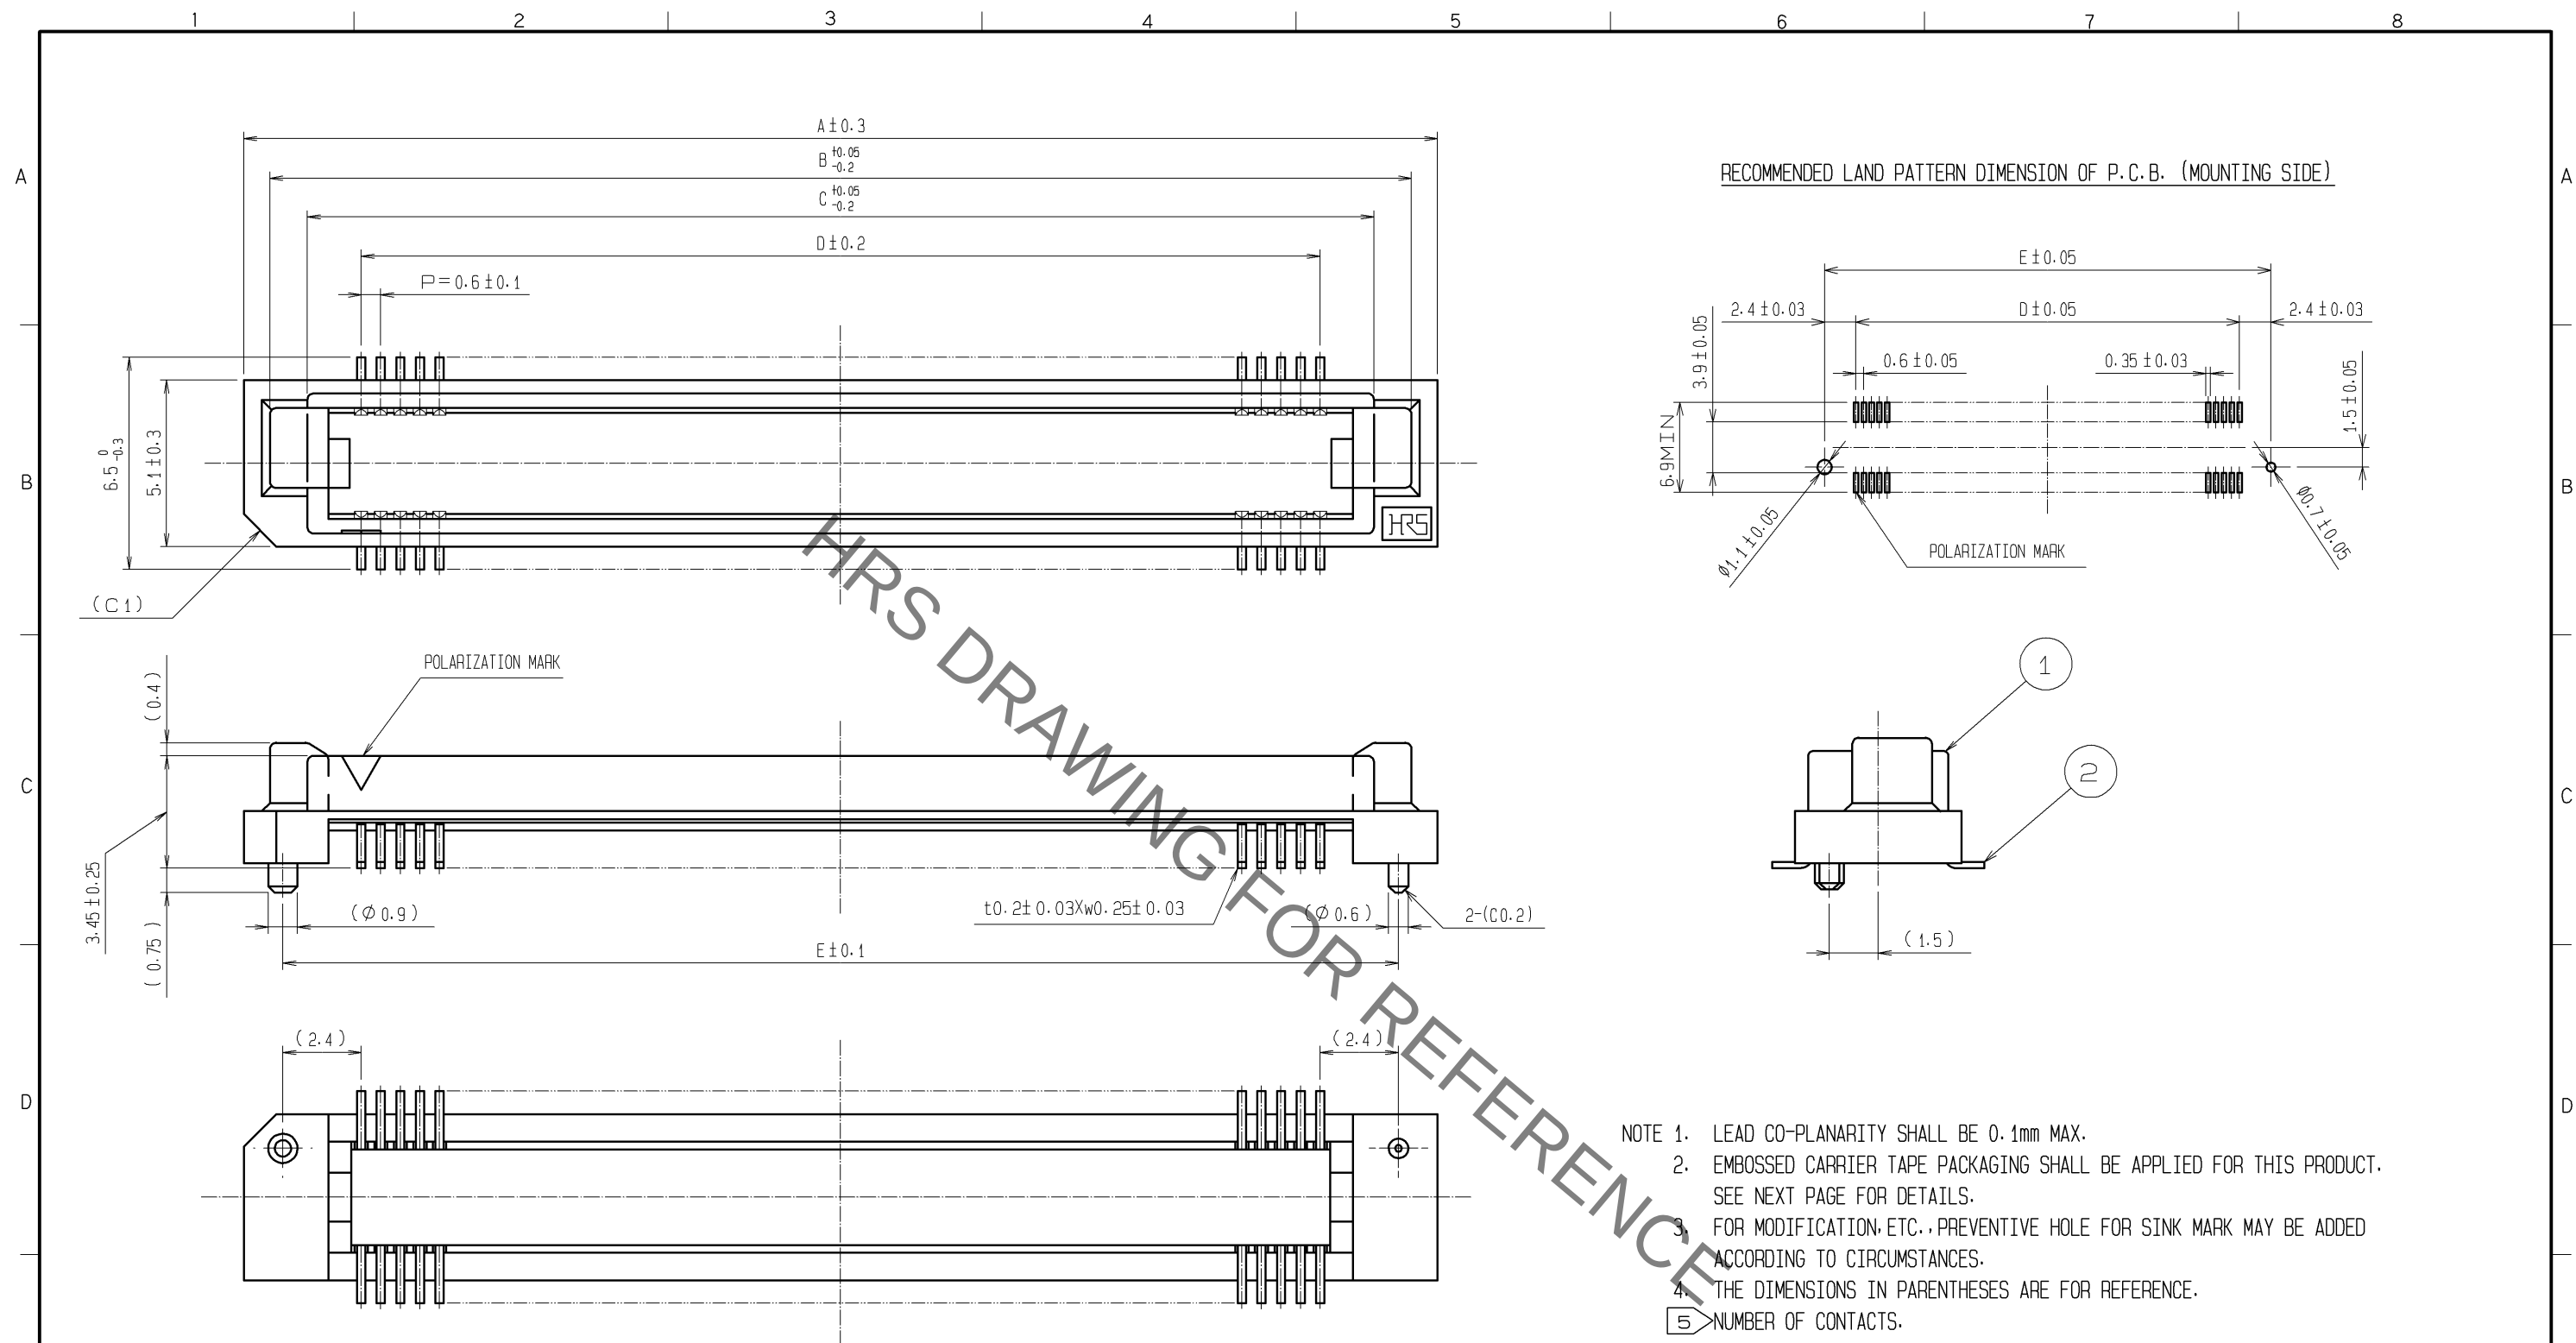





DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.		A	B	C	D	E
FX8- 60P-SV1(92)	CL578-0041-0-92	60	24.6	23	20.7	17.4	22.2
FX8- 80P-SV1(92)	CL578-0043-6-92	80	30.6	29	26.7	23.4	28.2
FX8- 90P-SV1(92)	CL578-0044-9-92	90	33.6	32	29.7	26.4	31.2
FX8-100P-SV1(92)	CL578-0045-1-92	100	36.6	35	32.7	29.4	34.2
FX8-120P-SV1(92)	CL578-0046-4-92	120	42.6	41	38.7	35.4	40.2
FX8-140P-SV1(92)	CL578-0047-7-92	140	48.6	47	44.7	41.4	46.2

4	POLYESTER	(TOP COVER TAPE)		2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.					
3	POLYSTYRENE	(EMBOSSED CARRIER TAPE)				LEAD AREA:TIN-PLATING 1μm min.					
1	PPS	LIGHT BROWN(UL94V-0)				UNDER PLATING:NICKEL1μm min.					
NO.	MATERIAL		FINISH . REMARKS		NO.	MATERIAL		FINISH . REMARKS			
UNITS mm				SCALE FREE		COUNT 2	DESCRIPTION OF REVISIONS DIS-F-006743		DESIGNED CR. TAKESHIMA	CHECKED HT. YAMAGUCHI	DATE 13. 04. 16
 HIROSE ELECTRIC CO., LTD.				APPROVED : KJ. KATAYOSE			05. 01. 05		DRAWING NO. EDC3-150727-22		
				CHECKED : HS. OKAWA			05. 01. 05		PART NO. FX8- *P-SV1(92)		
				DESIGNED : KT. DOI			05. 01. 05		CODE NO.		
				DRAWN : KT. DOI			05. 01. 05		 		

Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

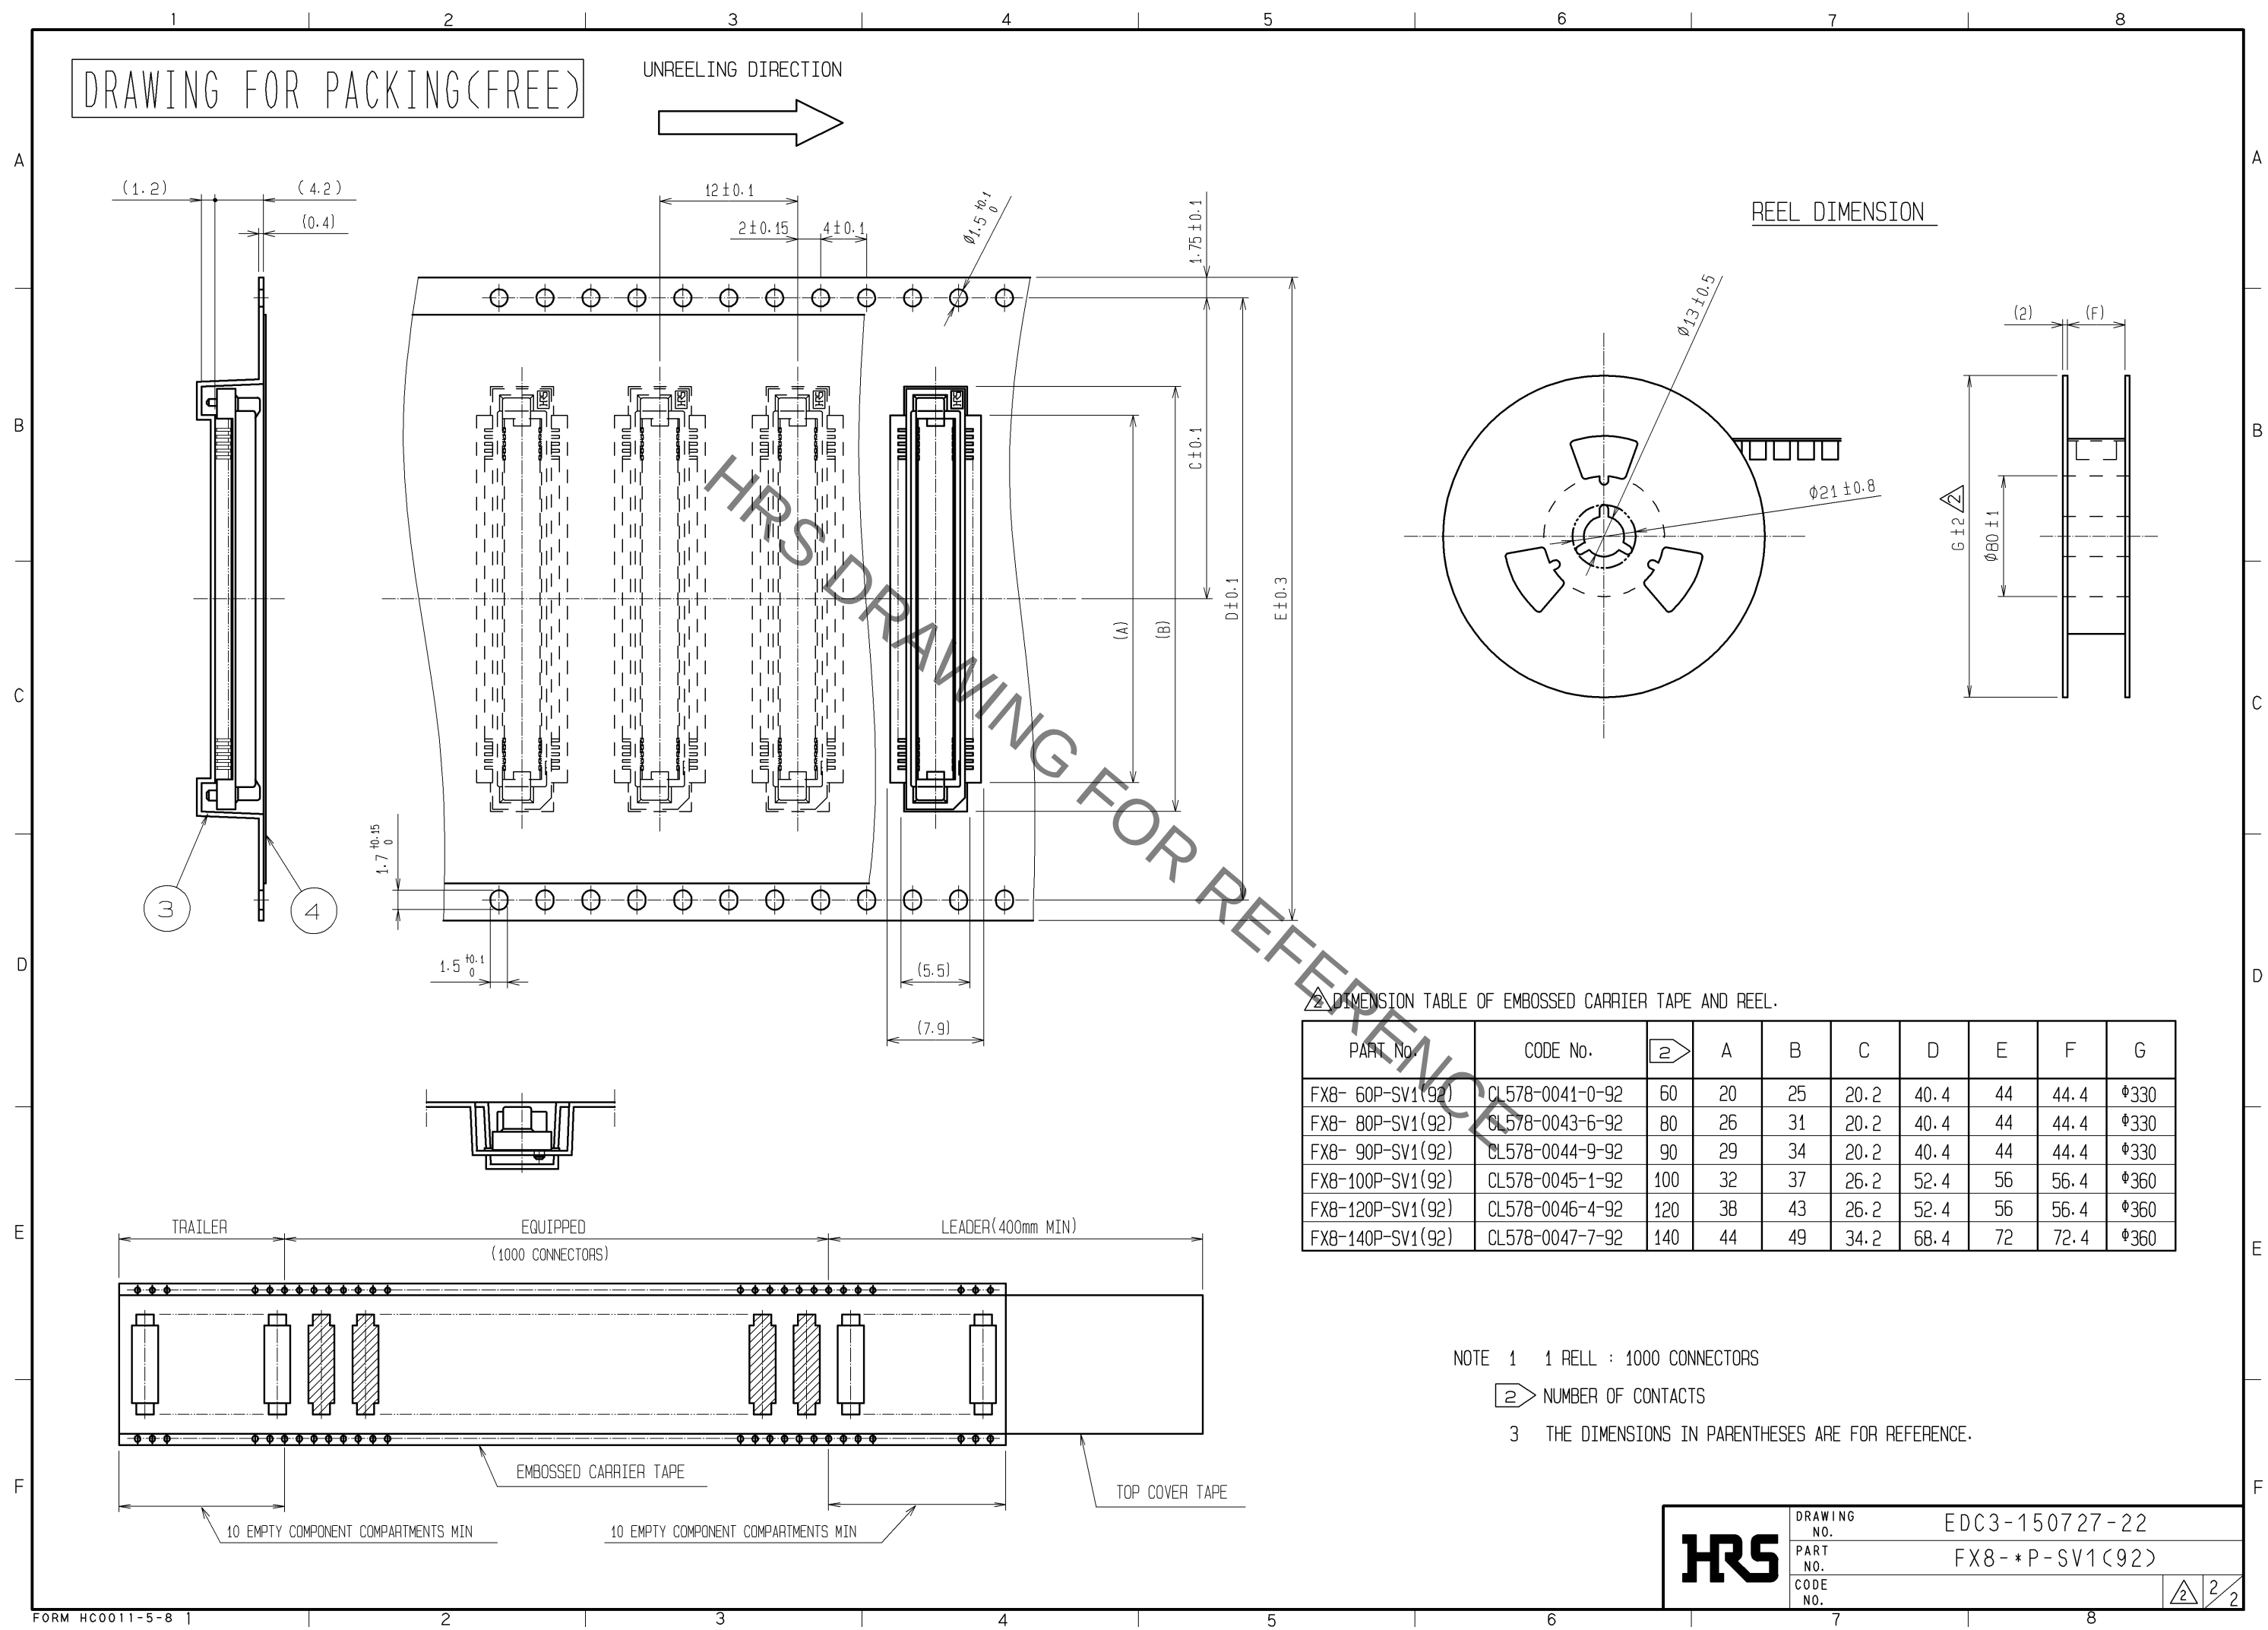

DRAWING NO.	EDC3-150727-22	
PART NO.	FX8- * P-SV1(92)	
CODE NO.	2	2