May.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

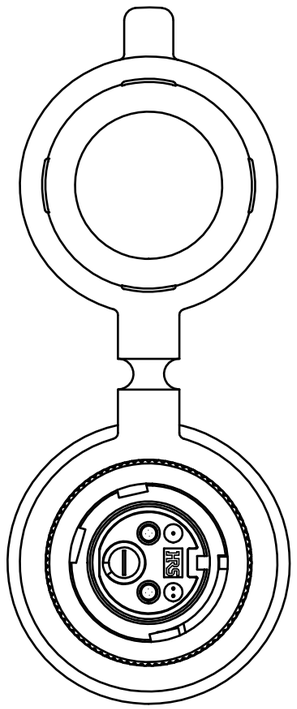

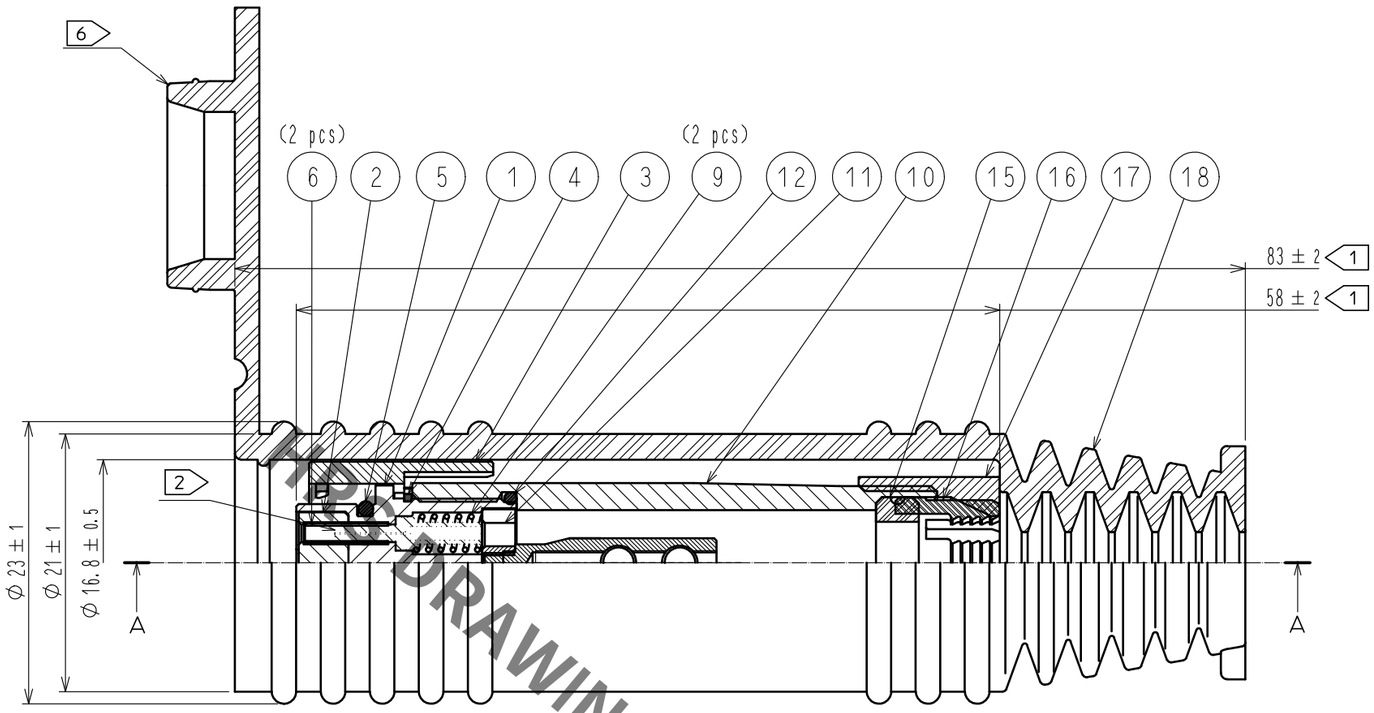



4 C–C



5 B–B

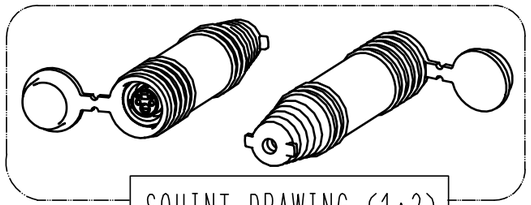

SQUINT DRAWING (1:2)

NOTE
1. These dimensions indicate the condition after cable assembly.
2. Ferrules are not included in this product. MU ferrules are separately available.
3. For connector mating, slide back rubber hood of part No. 18 until whole sleeve of part No. 3 is appeared. After mating, slide the rubber hood back until it touches to the receptacle.
4. Housing of part No. 10 has two holes for fixing with sleeve of part No. 1 by hexagon socket screw of part No. 13. Tighten the screw at either hole that is visible from a slit on the sleeve as shown in cross section C-C.
5. Tightening ring of part No. 17 has two holes for fixing hexagon socket screw of part No. 13. Tighten the screw at visible either hole, or either hole if both holes are visible.
6. For cleaning of the ferrule end, loosen the screw of part No. 8 and pick up the pre-assembled P shell B of part No. 2 by pulling the screw of part No. 8. Then, remove the split sleeves by using separately available sleeve-remover and clean the ferrules.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
9	PIANO WIRE	——	18	SYNTHETIC RUBBER	——
8	STAINLESS STEEL	——	17	ZINC DIE CASTING	CHROME PLATING
7	STAINLESS STEEL	——	16	SYNTHETIC RESIN	——
6	ZIRCONIA	——	15	SYNTHETIC RUBBER	——
5	SYNTHETIC RUBBER	——	14	STAINLESS STEEL	——
4	STAINLESS STEEL	——	13	STAINLESS STEEL	——
3	ZINC DIE CASTING	CHROME PLATING	12	SYNTHETIC RUBBER	——
2	ZINC DIE CASTING	CHROME PLATING	11	ZINC DIE CASTING	NICKEL PLATING
1	ZINC DIE CASTING	CHROME PLATING	10	ZINC DIE CASTING	CHROME PLATING
20	STAINLESS STEEL	——			
19	STAINLESS STEEL	——			

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△0					

HIROSE ELECTRIC CO., LTD.

APPROVED	MT. SHIBUTANI	18.03.28	DRAWING NO. EDC-177309-31-00
CHECKED	MT. SHIBUTANI	18.03.28	PART NO. MF10B-WPS6.5CH01-0200(31)
DESIGNED	SI. MATSUMOTO	18.03.28	CODE NO. CL709-1023-6-31 △0 1/1
DRAWN	SI. MATSUMOTO	18.03.28	

FOR REFERENCE