

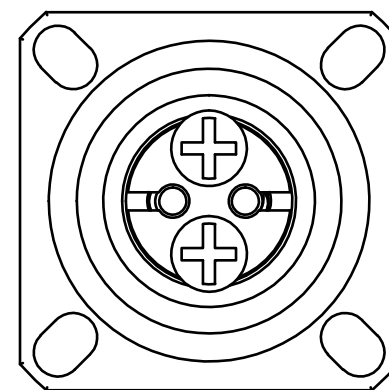
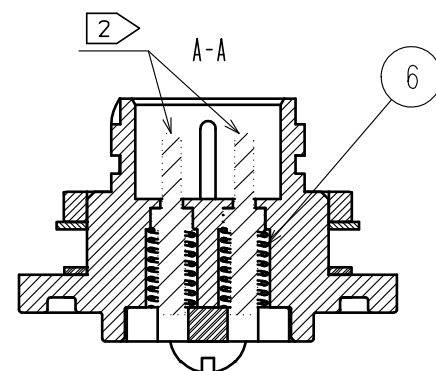
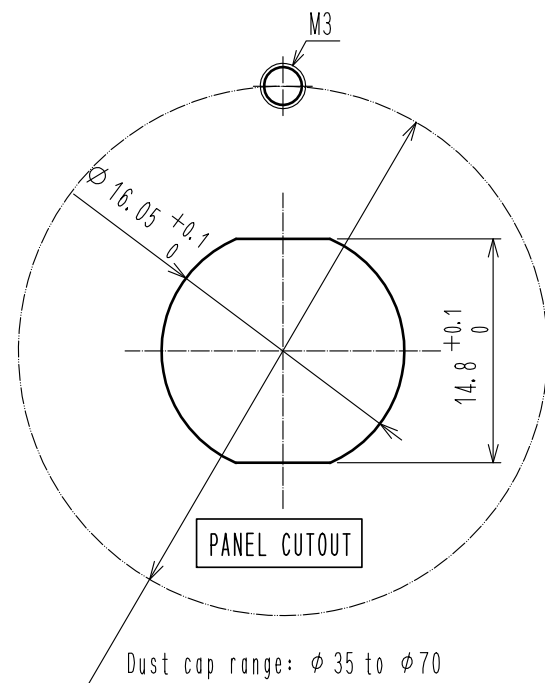


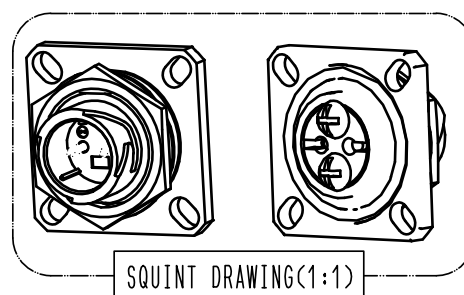

注 ① THESE DIMENSIONS INDICATE THE CONDITION AFTER CABLE ASSEMBLY.
② FERRULES ARE NOT INCLUDED IN THIS PRODUCT. MU FERRULES ARE SEPARATELY AVAILABLE.
③ RECOMMENDED TIGHTENING TORQUE IS 3.0N・m OF REF.2.



4	SYNTHETIC RUBBER	_____	8	SYNTHETIC RUBBER	_____					
3	BRASS	CHROME PLATING (BLACK)	7	STAINLESS STEELS	_____					
2	BRASS	CHROME PLATING (BLACK)	6	PIANO WIRE	ZINC PLATING + BAKING					
1	ZINC DIE CASTING	CHROME PLATING (BLACK)	5	SYNTHETIC RESIN	_____					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED		•MT. SHIBUTANI		18. 02. 02		DRAWING NO. EDC-177311-31-00		
		CHECKED		•FS. YOSHIDA		18. 02. 02		PART NO. MF10B-WRBH01-0200(31)		
		DESIGNED		•TY. SATO		18. 02. 02		CODE NO. CL709-1025-1-31		
		DRAWN		•MK. INOUE		18. 02. 02		 		