




Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

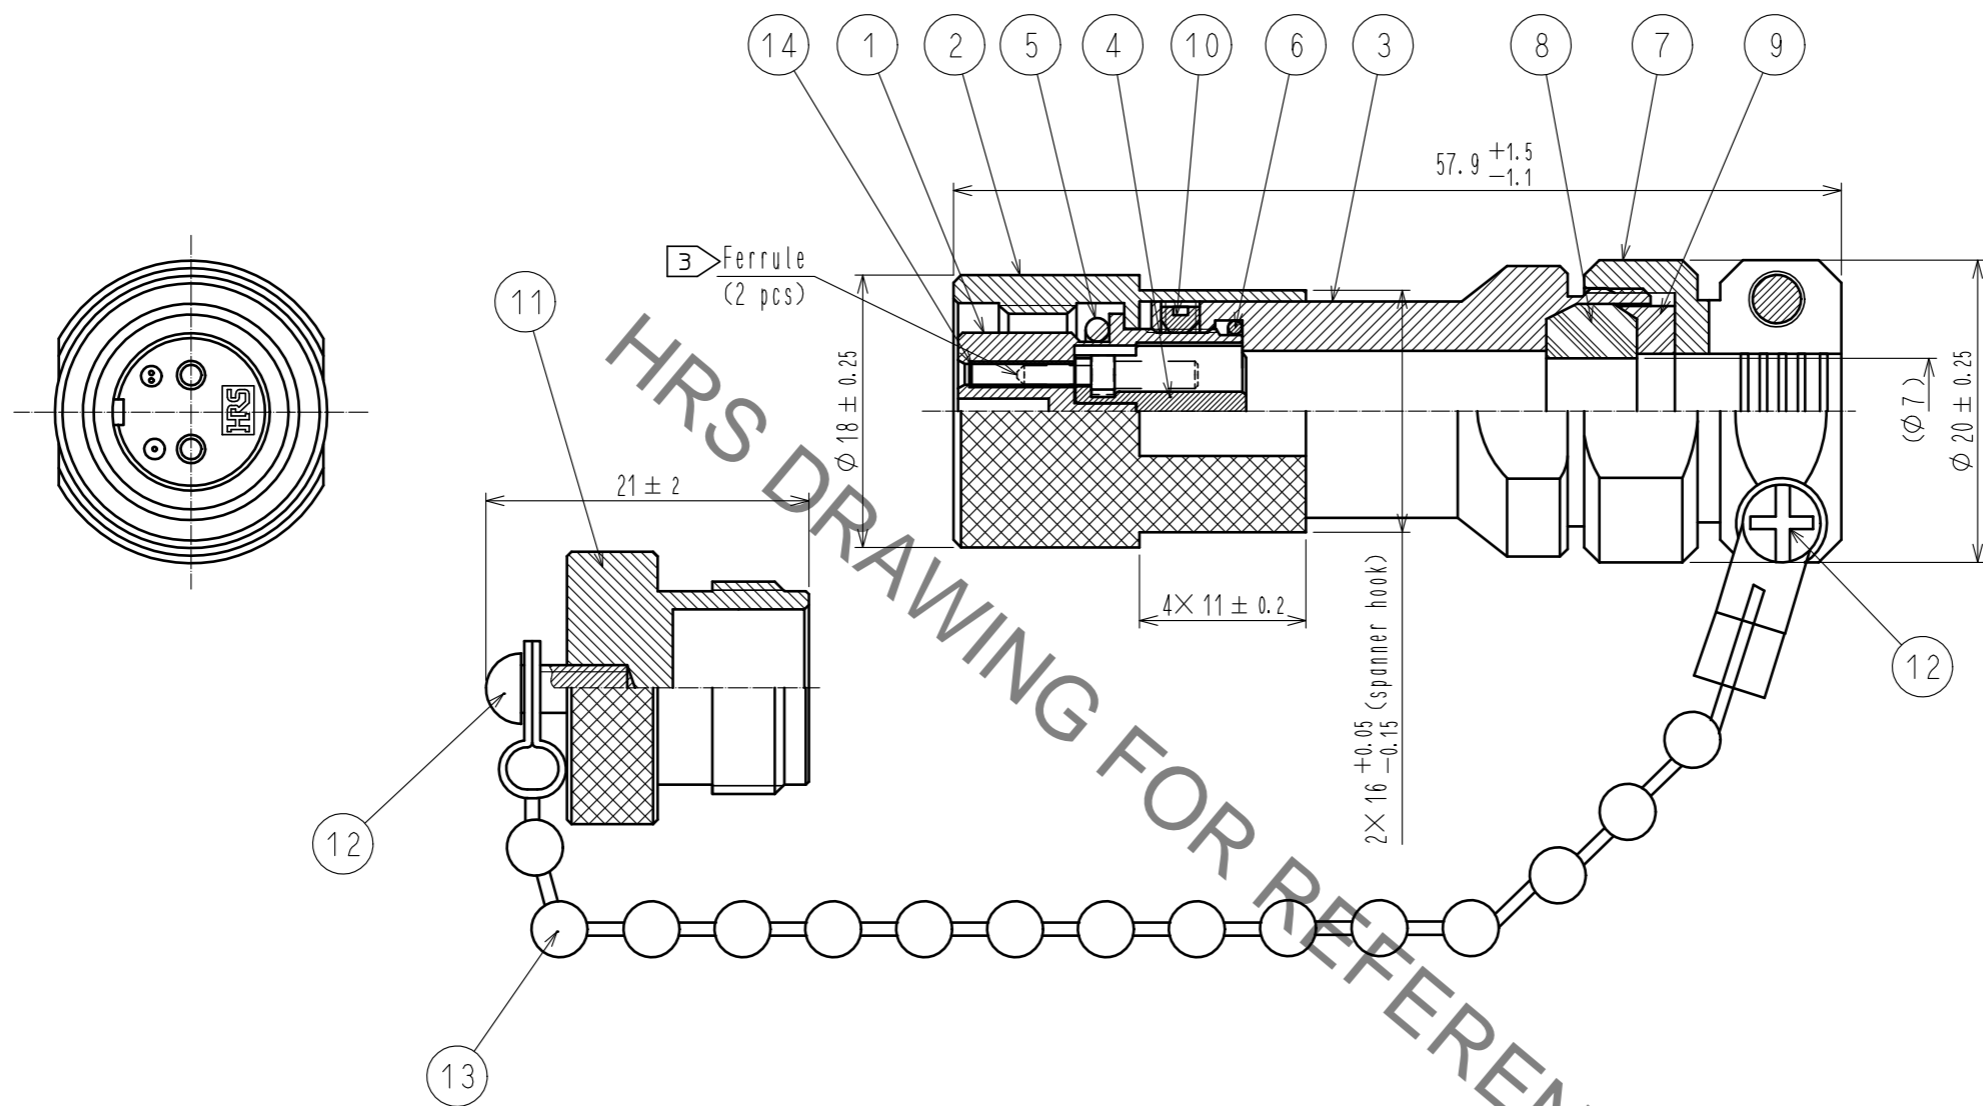

- NOTE 1. The procedure of cable assemblies would be confirm.  
 2. When this plug is mated with a MF10S receptacle, the clamp torque of the part No. ② should be 1.5 to 3 N·m. Following MF10-T1 can be used as simple substitution of a torque wrench.

EXCLUSIVE PLASTIC SPANNER	PART NO.	CODE NO.
	MF10-T1	CL709-0205-8

③ The ferrule parts are not contained. Please use the 'standard MU ferrule' chosen from the outer diameter of the optical fiber.

7	BRASS	NICKEL PLATING	14	ZIRCONIA			
6	NBR RUBBER	COLOR:BLACK	13	STAINLESS STEEL			
5	NBR RUBBER	COLOR:BLACK	12	STAINLESS STEEL	NYELOCK		
4	ZINC DIECAST	NICKEL PLATING	11	ALUMINIUM ALLOY	ANODIC OXIDE COATING		
3	BRASS	NICKEL PLATING	10	STAINLESS STEEL			
2	BRASS	NICKEL PLATING	9	PPS RESIN	COLOR:BLACK		
1	ZINC DIECAST	NICKEL PLATING	8	NBR RUBBER	COLOR:BLACK		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : MT. SHIBUTANI	18.02.02	DRAWING NO. EDC-178954-31-00			
		CHECKED : FS. YOSHIDA	18.02.02	PART NO. MF10S-WPN7C50-0200(31)			
		DESIGNED : TY. SATO	18.02.02	CODE NO. CL709-0214-9-31			
		DRAWN : MK. INOUE	18.02.01			1/1	