

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL INC.
FED. MFG. CODE 91929



SWITCH - BASIC

CATALOG LISTING




2MN3

S

4X 8-32 UNC PAN HEAD SCREW AND
CLAMPING PRESSURE PLATE



CIRCUIT DIAGRAM

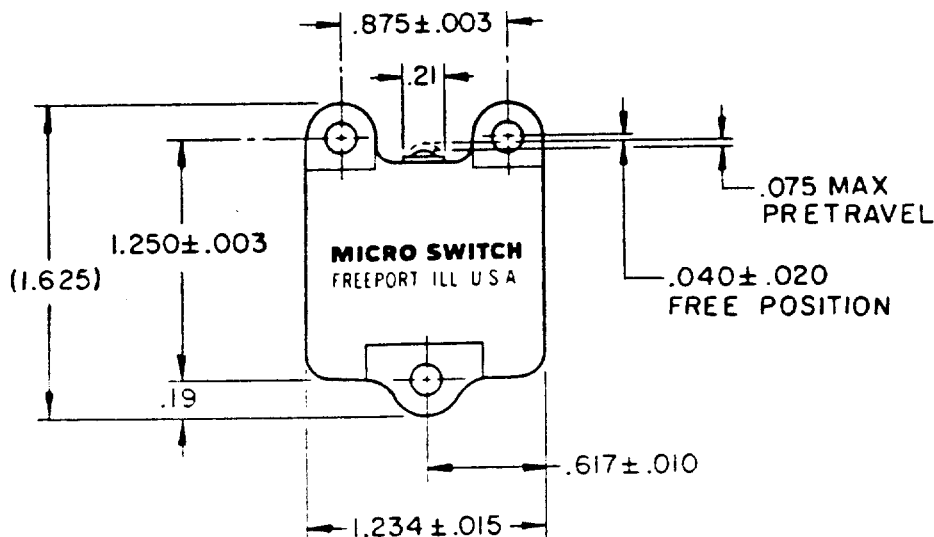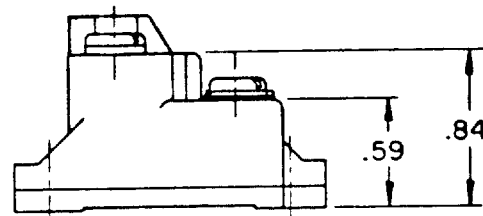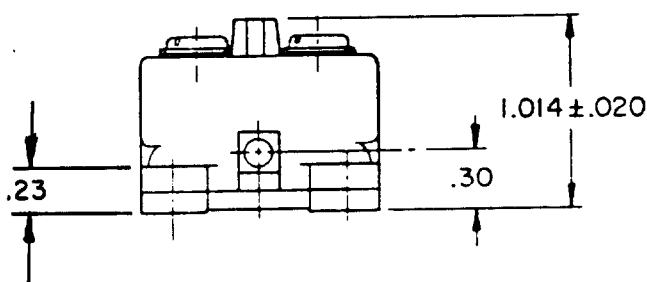


NOTE

1 - MOUNTING HOLES WILL ACCEPT NO. 4 SCREWS ON .875 ± .003
AND 1.250 ± .003 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — — 16-24 OZ.
RELEASE FORCE — — — — — 10 OZ MIN
DIFFERENTIAL TRAVEL — — .005—.009
OVERTRAVEL — — — — — .017 MIN
RELEASE TRAVEL — — — — — .022 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

10A 125, 250 OR 480 VAC
1/2 HP 125 VAC, 1 HP 250 VAC
PILOT DUTY: 600 VAC MAX

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT

2MN3

M

DRAWING
NUMBER

1314

ISSUE

REVISIONS

A	CO 65814-D
	SAV
	27 JUN 90
B	CO- 77031
	JDB
	22 DEC 93

CHECK

REWORK

REWORK

CHECK

REWORK

REWORK

SAV

10-52848-B

DRAWN