Q



Specifications

Essentials Performance Supplemental Information Memory Specifications Processor Graphics Expansion Options

Package Specifications Advanced Technologies

Security & Reliability

Ordering and Compliance

Compatible products

Downloads and Software

Intel[®] Core[™] i3-7300T Processor

Add to Compare

4M Cache, 3.50 GHz

Support Home > Product Specifications > Processors

Essentials	• Export specifications
Product Collection	7th Generation Intel® Core™ i3 Processors
Code Name	Products formerly Kaby Lake
Vertical Segment	Desktop
Processor Number	i3-7300T
Status	Launched
Launch Date ?	Q1'17
Lithography 🕐	14 nm
Recommended Customer Pr	ice 🕐 -

Performance

# of Cores 🕐	2
# of Threads 🕐	4
Processor Base Frequency 🕐	3.50 GHz
Cache 🕐	4 MB SmartCache
Bus Speed 👔	8 GT/s DMI3
# of QPI Links 👔	0
TDP 🕐	35 W
Configurable TDP-down Frequency 🕐	2.50 GHz
Configurable TDP-down 🕐	25 W

Supplemental Information

Embedded Options Available (?	No
Datasheet	View now

Memory Specifications

Max Memory Size (dependent on memo	ory type) 👔 64 GB
Memory Types 👔	DDR4-2133/2400, DDR3L-1333/1600 @ 1.35V
Max # of Memory Channels ?	2
ECC Memory Supported ‡ 👔	Yes

Processor Graphics

Processor Graphics ‡ 🕐	Intel [®] HD Graphics 630
Graphics Base Frequency 🕐	350 MHz
Graphics Max Dynamic Frequency 🕐	1.10 GHz
Graphics Video Max Memory 🕐	64 GB
4K Support 🕐	Yes, at 60Hz
Max Resolution (HDMI 1.4)‡ 🕐	4096x2304@24Hz
Max Resolution (DP)‡ 🕐	4096x2304@60Hz
Max Resolution (eDP - Integrated Flat Panel)‡ 🕐	4096x2304@60Hz
DirectX* Support ?	12
OpenGL* Support 👔	4.5
Intel® Quick Sync Video 👔	Yes
Intel® InTru™ 3D Technology 🕐	Yes
Intel® Clear Video HD Technology 👔	Yes
Intel® Clear Video Technology 🕐	Yes
# of Displays Supported [‡]	3
Device ID	0x5912

Expansion Options

Scalability	1S Only
PCI Express Revision (?)	3.0
PCI Express Configurations ‡ 🕐	Up to 1x16, 2x8, 1x8+2x4
Max # of PCI Express Lanes 👔	16

Package Specifications

Sockets Supported 🕐	FCLGA1151
Max CPU Configuration	1
Thermal Solution Specification 🕐	PCG 2015A (35W)
T _{JUNCTION} (?)	92°C
Package Size	37.5mm x 37.5mm
Low Halogen Options Available	No

Advanced Technologies


Intel® Optane™ Memory Supported ‡ 🕐	Yes
Intel® Turbo Boost Technology ‡ 🕐	No
Intel® vPro™ Platform Eligibility ‡ 🕐	No
Intel® Hyper-Threading Technology ‡ 👔	Yes
Intel® Virtualization Technology (VT-x) ‡ 👔	Yes
Intel® Virtualization Technology for Directed I/O (VT-d) ‡ 👔	Yes

Intel® VT-x with Extended Page Tables (EPT)‡ 👔	Yes
Intel® TSX-NI (No
Intel® 64 ‡ 🕐	Yes
Instruction Set 👔	64-bit
Instruction Set Extensions ?	Intel® SSE4.1, Intel® SSE4.2, Intel® AVX2
Idle States 🕐	Yes
Enhanced Intel SpeedStep® Technology 🕐	Yes
Thermal Monitoring Technologies 🕐	Yes
Intel® Identity Protection Technology ‡ 🕐	Yes
Intel® Stable Image Platform Program (SIPP) 🕐	No

Security & Reliability

Intel® AES New Instructions 💿	Yes
Secure Key 🕐	Yes
Intel® Software Guard Extensions (Intel® SGX) ?	Yes with Intel® ME
Intel® Memory Protection Extensions (Intel® MPX) 🕐	Yes
Intel® OS Guard	Yes
Intel® Trusted Execution Technology ‡ 🕐	No
Execute Disable Bit ‡ 👔	Yes
Intel® Boot Guard 🕐	Yes

More support options for Intel[®] Core[™] i3-7300T Processor (4M Cache, 3.50 GHz)

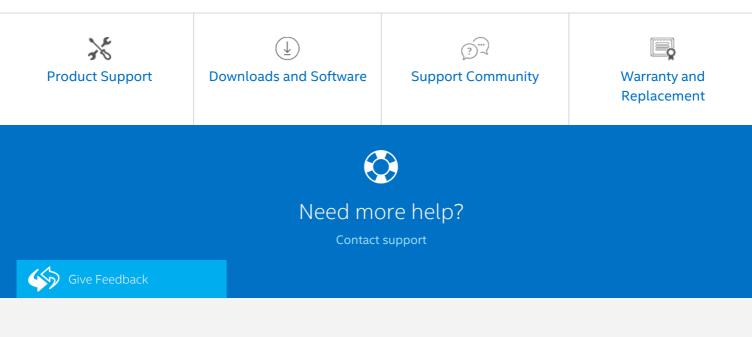

All information provided is subject to change at any time, without notice. Intel may make changes to manufacturing life cycle, specifications, and product descriptions at any time, without notice. The information herein is provided "as-is" and Intel does not make any representations or warranties whatsoever regarding accuracy of the information, nor on the product features, availability, functionality, or compatibility of the products listed. Please contact system vendor for more information on specific products or systems.

Intel classifications are for informational purposes only and consist of Export Control Classification Numbers (ECCN) and Harmonized Tariff Schedule (HTS) numbers. Any use made of Intel classifications are without recourse to Intel and shall not be construed as a representation or warranty regarding **Arrow.com**. Classifications are importer and/or exporter is responsible for determining the correct classification of your transaction.

Refer to Datasheet for formal definitions of product properties and features.

[‡] This feature may not be available on all computing systems. Please check with the system vendor to determine if your system delivers this feature, or reference the system specifications (motherboard, processor, chipset, power supply, HDD, graphics controller, memory, BIOS, drivers, virtual machine monitor-VMM, platform software, and/or operating system) for feature compatibility. Functionality, performance, and other benefits of this feature may vary depending on system configuration.

System and Maximum TDP is based on worst case scenarios. Actual TDP may be lower if not all I/Os for chipsets are used.

"Announced" SKUs are not yet available. Please refer to the Launch Date for market availability.

See http://www.intel.com/content/www/us/en/architecture-and-technology/hyper-threading/hyper-threading-technology.html? wapkw=hyper+threading for more information including details on which processors support Intel® HT Technology.

Max Turbo Frequency refers to the maximum single-core processor frequency that can be achieved with Intel® Turbo Boost Technology. See www.intel.com/technology/turboboost/ for more information.

Intel processor numbers are not a measure of performance. Processor numbers differentiate features within each processor family, not across different processor families. See http://www.intel.com/content/www/us/en/processor/processor-numbers.html for details.

Processors that support 64-bit computing on Intel® architecture require an Intel 64 architecture-enabled BIOS.

Some products can support AES New Instructions with a Processor Configuration update, in particular, i7-2630QM/i7-2635QM, i7-2670QM/i7-2675QM, i5-2430M/i5-2435M, i5-2410M/i5-2415M. Please contact OEM for the BIOS that includes the latest Processor configuration update.

Check http://ipt.intel.com/ for systems that support Intel® Identity Protection Technology (Intel® IPT).

