

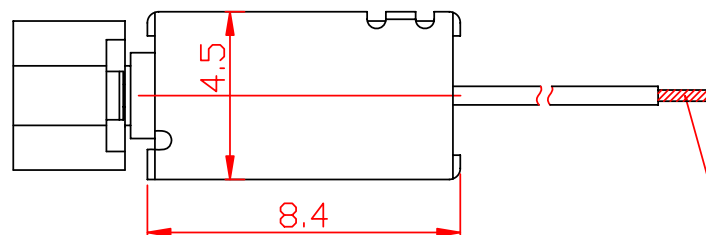
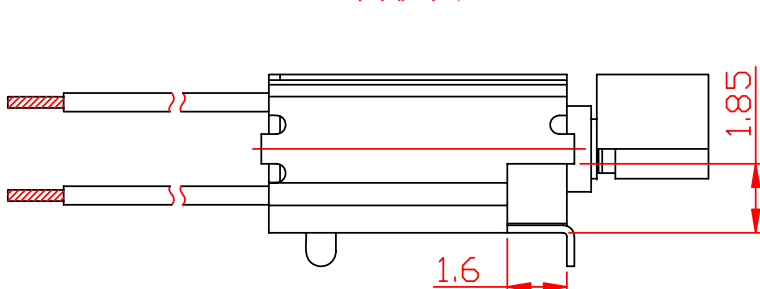
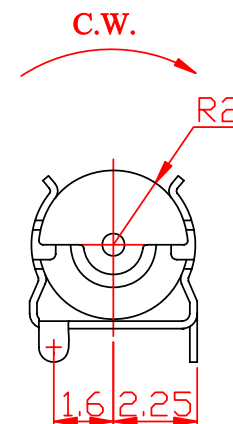


Z4TL2B037154E

C 向视图

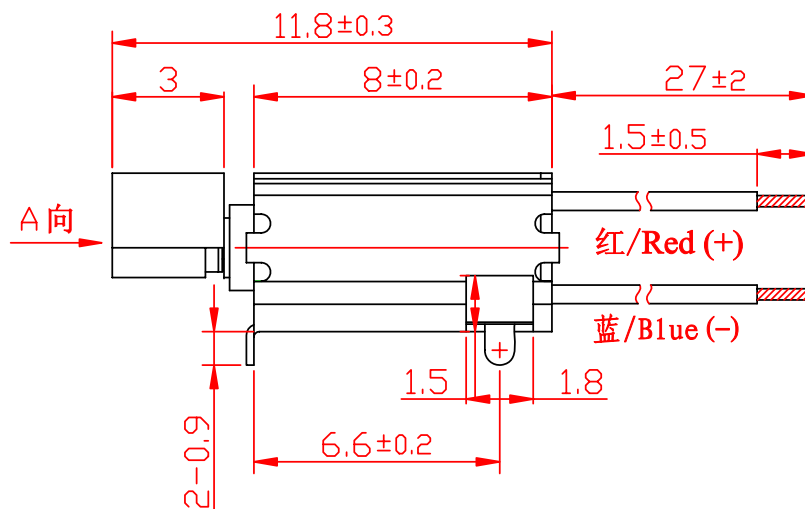

浸锡/Tinned

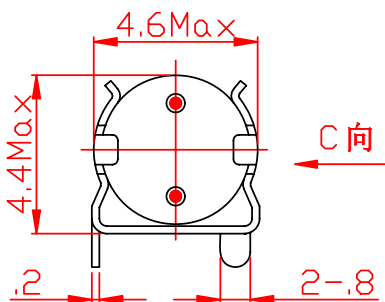

技术要求/Technic requirement

- 1.额定电压/Rated voltage:3.0V
- 2.额定电流/Rated current:90mA Max
- 3.额定转速/Rated speed:14000 ± 2500rpm
- 4.堵转电流/Stall current:125mA Max
- 5.端子阻抗/Terminal resistance:30Ω(±20%)
- 6.起动电压/Starting voltage:2.0V Max
- 7.轴向间隙/Shaft end play:0.05~0.2mm
- 8.导线规格/Lead spec: AWG32 UL1571
- 9.所有尺寸为A向压紧后的尺寸(不包括轴向间隙)
/Overall length is measured after counterweight being pressed against body in direction A. (Shaft end play is not included.)
- 10.未注线性公差为/Unmarked tolerance: ± 0.1mm

标记	处数	分区	更改文件号	签名	日期
设计			标准化		
校对					
审核					
工艺			批准		

jinlong-machinery.com

阶段标记 重量 比例

5:1

共 页

第 页

金龙机电股份有限公司

外形图

Z4TL2B037154E

借(通)用件登记

底图总号

签 字

日 期