


KEMET, FLLD4-TH, EMI/RFI Filters, Noise Suppression, 520 VAC, 120 A, 250x140x140mm

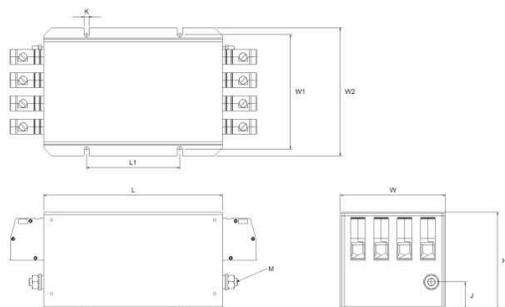

General Information	
<b>Series:</b>	FLLD4-TH
<b>Style:</b>	Chassis Mount
<b>Description:</b>	EMI Filter, Classis Mount, Compact
<b>Features:</b>	Three Phase, High Performance
<b>RoHS:</b>	Yes
<b>Qualifications:</b>	IEC/EN 60939
<b>Lead:</b>	Threaded Studs M10

Dimensions	
<b>L</b>	250mm NOM
<b>W</b>	140mm NOM
<b>H</b>	140mm NOM
<b>L1</b>	200mm NOM
<b>W1</b>	153.5mm NOM
<b>W2</b>	170mm NOM
<b>J</b>	55mm NOM
<b>K</b>	6.5mm NOM
<b>M (Earth)</b>	Threaded Studs M10
<b>Lead</b>	Threaded Studs M10

Specifications	
<b>Voltage AC:</b>	520 VAC, 300 VAC
<b>Rated Frequency:</b>	50-60 Hz
<b>Ripple Current:</b>	120 A (50°C)
<b>Rated Temperature:</b>	50°C
<b>Temperature Range:</b>	-25/+100°C
<b>Climate Category:</b>	25/100/21
<b>Test Voltage DC (P to P):</b>	2250 VDC
<b>Test Voltage DC (P to E):</b>	3000 VDC
<b>Voltage:</b>	2250 VDC (Test P to P), 3000 VDC (Test P to E)
<b>Power Loss:</b>	30 W (25°C 50 Hz)
<b>Leakage Current:</b>	11 mA

Packaging Specifications	
<b>Packaging:</b>	Bulk
<b>Packaging Quantity:</b>	1
<b>Weight:</b>	5.3 kg

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.