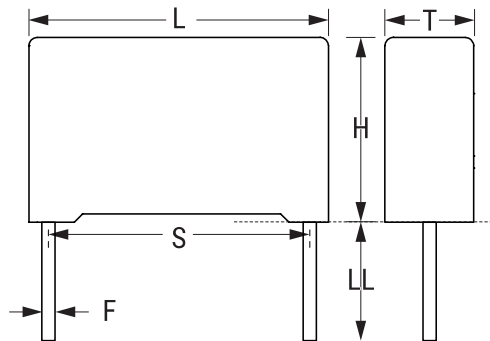


R46 275 VAC MINI, Film, Metallized Polypropylene, Safety, 1.5 uF, 20%, 275 VAC (X2), 560 VDC, 110°C, Lead Spacing = 27.5mm

**Dimensions**

| | |
|----|------------------|
| L | 32mm +0.3/-0.7mm |
| H | 20mm +0.1/-0.7mm |
| T | 11mm +0.2/-0.7mm |
| S | 27.5mm +/-0.4mm |
| LL | 4mm +2mm |
| F | 0.8mm +/-0.05mm |

Packaging Specifications

| | |
|---------------------|------|
| Packaging: | Tray |
| Packaging Quantity: | 560 |

General Information

| | |
|-----------------|--------------------------|
| Series: | R46 275 VAC MINI |
| Dielectric: | Metallized Polypropylene |
| Style: | Radial |
| Features: | EMI Safety |
| RoHS: | Yes |
| Lead: | Cut |
| Qualifications: | ENEC, UL, cUL, CQC |
| AEC-Q200: | No |

Specifications

| | |
|------------------------|--------------|
| Capacitance: | 1.5 uF |
| Capacitance Tolerance: | 20% |
| Voltage AC: | 275 VAC (X2) |
| Voltage DC: | 560 VDC |
| Temperature Range: | -40/+110°C |
| Rated Temperature: | 110°C |
| Dissipation Factor: | 0.1% 1kHz |
| Insulation Resistance: | 20 GOhms |
| Max dV/dt: | 150 V/us |
| Safety Class: | X2 |