


Film, Metallized Polyester, Commercial Grade, R60, 2.2 uF, 10%, 250 V, 85C, Lead Spacing = 22.5mm

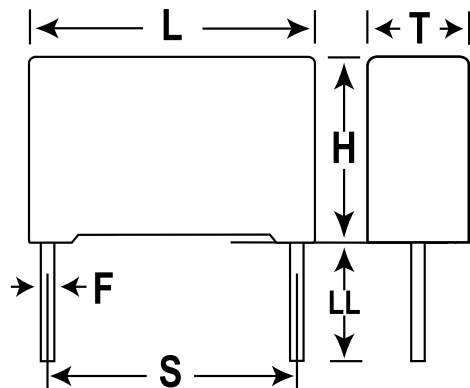

#### Dimensions

|    |                 |
|----|-----------------|
| L  | 26.5mm +0.3mm   |
| H  | 18.5mm +1mm     |
| T  | 10mm +0.2mm     |
| S  | 22.5mm +/-0.4mm |
| LL | 4mm +1.5mm      |
| F  | 0.8mm +/-0.05mm |

#### Packaging Specifications

|                     |      |
|---------------------|------|
| Packaging:          | Bulk |
| Packaging Quantity: | 396  |

#### General Information

|                |                                                                                                                                               |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Dielectric:    | Metallized Polyester                                                                                                                          |
| Style:         | Radial                                                                                                                                        |
| Series:        | R60                                                                                                                                           |
| Features:      | Pulse                                                                                                                                         |
| RoHS:          | Yes                                                                                                                                           |
| Lead:          | Cut                                                                                                                                           |
| Approvals:     | AEC-Q200                                                                                                                                      |
| AEC-Q200:      | Yes                                                                                                                                           |
| Miscellaneous: | Upper Operating Temperature Of 125C Is Allowed For A Maximum Operating Time Of 1,000 Hours. Above 85C, DC And AC Voltage Derating Is 1.25%/C. |

#### Specifications

|                        |           |
|------------------------|-----------|
| Capacitance:           | 2.2 uF    |
| Capacitance Tolerance: | 10%       |
| Voltage DC:            | 250 VDC   |
| Voltage AC:            | 160 VAC   |
| Temperature Range:     | -55/+105C |
| Rated Temperature:     | 85C       |
| Dissipation Factor:    | 1% 1kHz   |
| Insulation Resistance: | 10 GOhms  |
| Max dVdt:              | 8 V       |
| Inductance:            | 18 nH     |