

Part Number: WP4060XH/3ID

High Efficiency Red


### Features

- PRE-TRIMMED LEADS FOR PC MOUNTING.
- I.C. COMPATIBLE.
- BLACK CASE ENHANCES CONTRAST RATIO.
- WIDE VIEWING ANGLE.
- HIGH RELIABILITY LIFE MEASURED IN YEARS.
- UL RATING : 94V-0.
- HOUSING MATERIAL: TYPE 66 NYLON.
- RoHS COMPLIANT.

### Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

### Package Dimensions

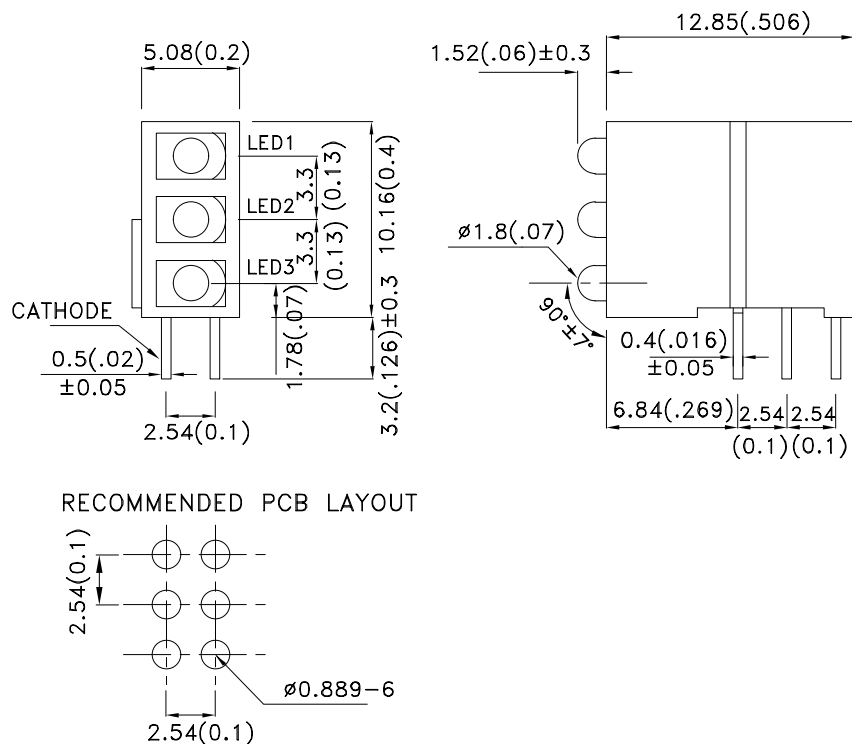

#### Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Lead spacing is measured where the lead emerge from the package.
4. Specifications are subject to change without notice.



## Selection Guide

| Part No.     | Dice                            | Lens Type    | Iv (mcd) [2]<br>@ 10mA |      | Viewing<br>Angle [1] |
|--------------|---------------------------------|--------------|------------------------|------|----------------------|
|              |                                 |              | Min.                   | Typ. | 2θ1/2                |
| WP4060XH/3ID | High Efficiency Red (GaAsP/GaP) | RED DIFFUSED | 8                      | 15   | 70°                  |

### Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.
2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

| Symbol | Parameter                | Device              | Typ. | Max. | Units | Test Conditions |
|--------|--------------------------|---------------------|------|------|-------|-----------------|
| λpeak  | Peak Wavelength          | High Efficiency Red | 627  |      | nm    | IF=20mA         |
| λD [1] | Dominant Wavelength      | High Efficiency Red | 625  |      | nm    | IF=20mA         |
| Δλ1/2  | Spectral Line Half-width | High Efficiency Red | 45   |      | nm    | IF=20mA         |
| C      | Capacitance              | High Efficiency Red | 15   |      | pF    | VF=0V;f=1MHz    |
| VF [2] | Forward Voltage          | High Efficiency Red | 2    | 2.5  | V     | IF=20mA         |
| IR     | Reverse Current          | High Efficiency Red |      | 10   | uA    | VR = 5V         |

### Notes:


- 1.Wavelength: +/-1nm.
2. Forward Voltage: +/-0.1V.

## Absolute Maximum Ratings at TA=25°C

| Parameter                     | High Efficiency Red | Units |
|-------------------------------|---------------------|-------|
| Power dissipation             | 75                  | mW    |
| DC Forward Current            | 30                  | mA    |
| Peak Forward Current [1]      | 160                 | mA    |
| Reverse Voltage               | 5                   | V     |
| Operating/Storage Temperature | -40°C To +85°C      |       |
| Lead Solder Temperature [2]   | 260°C For 3 Seconds |       |
| Lead Solder Temperature [3]   | 260°C For 5 Seconds |       |






### Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.
3. 5mm below package base.

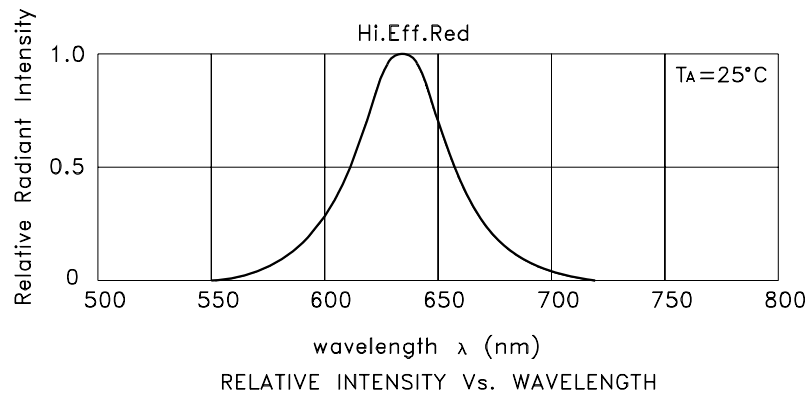


## High Efficiency Red

## WP4060XH/3ID

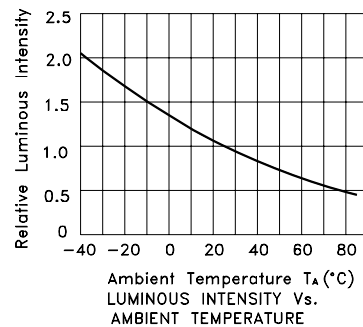

## PACKING & LABEL SPECIFICATIONS

WP4060XH/3ID

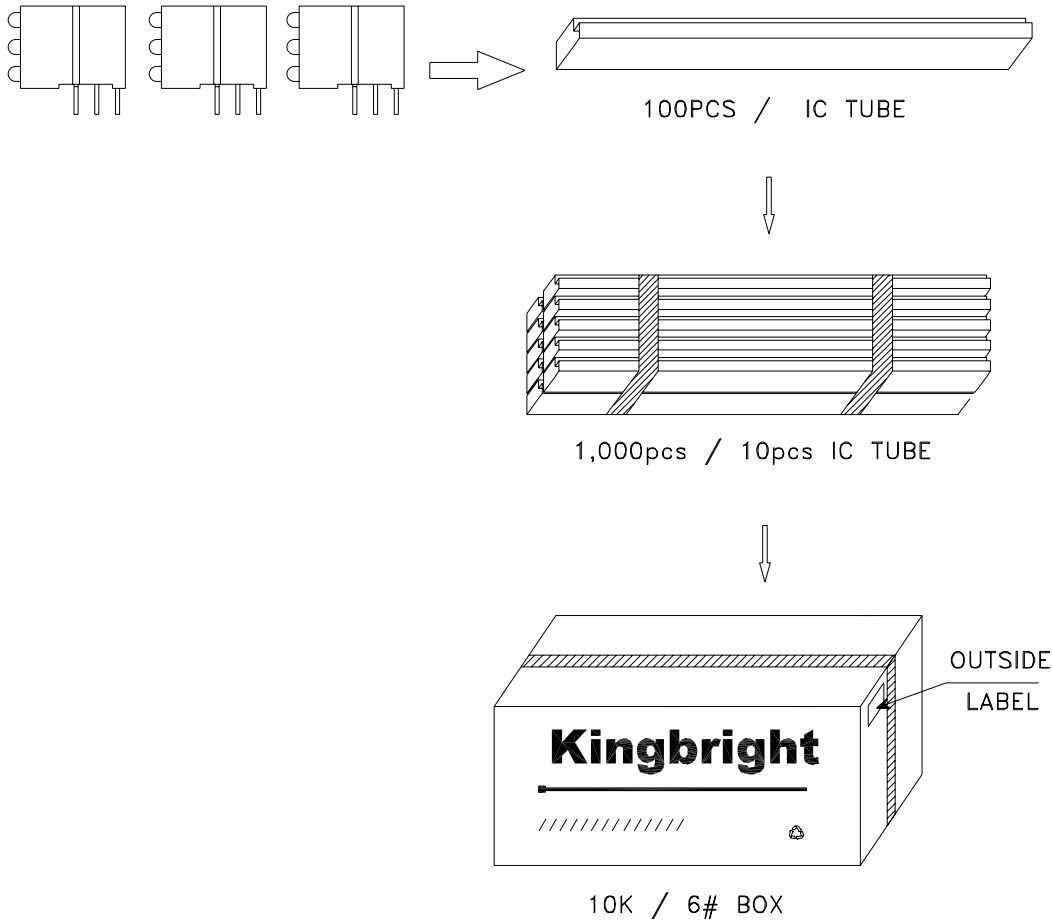

|                                                                                                              |          |
|--------------------------------------------------------------------------------------------------------------|----------|
| <b>Kingbright</b>                                                                                            |          |
| Q.C.                                                                                                         |          |
| TYPE NO : WP4060XHxxx                                                                                        |          |
| QUANTITY : 1,000 pcs                                                                                         |          |
| S/N : XX                                                                                                     | CODE: XX |
| LOT NO : <br>xxxxxxxxxxxx |          |
| RoHS Compliant                                                                                               |          |