

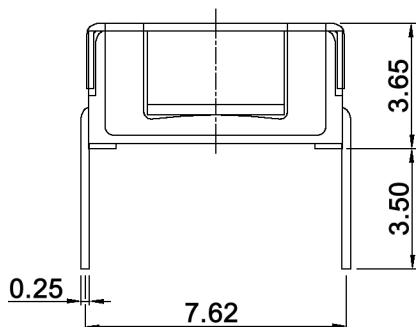


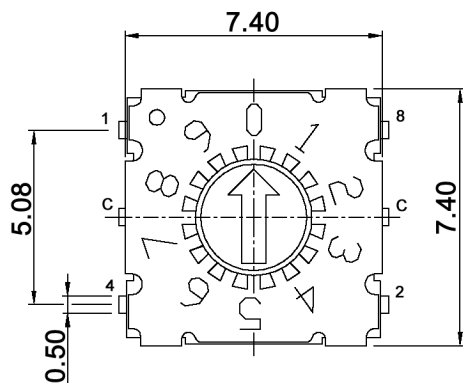


BCD inverse		Complement coded				
10 P o s i t i o n s		C	1	2	4	8
	0	●	●	●	●	●
	1	●			●	●
	2	●	●		●	●
	3	●			●	●
	4	●	●	●		●
	5	●		●		●
	6	●	●			●
	7	●				●
	8	●	●	●	●	
	9	●		●	●	

P.C.B. DIMENSION

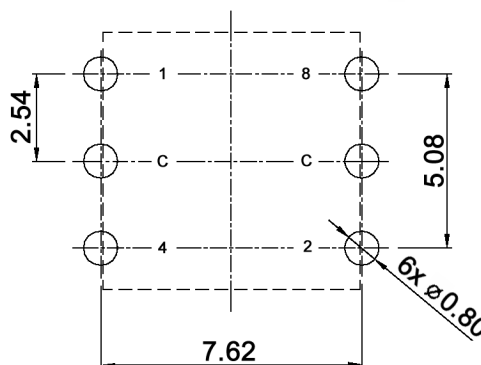

Specifications:

Contact rating:	non-switching: 400mA, 42V switching: 100mA, 42V
Contact resistance:	80mOhm max.
Insulation resistance:	100MOhm min. at 250V DC for 1 minute +/-5sec.
Dielectric strength:	250V DC (50Hz/60Hz) for 1 minute
Operating temperature:	-50°C to +125°C
Storage temperature:	-55°C to +135°C
Mechanical life:	25 000 cycles
Operating force:	120 +/-30gf/cm
Soldering conditions:	auto-soldering: max.: 260 +/-5°C, 5 +/-1sec. IR reflow soldering: see profile
Packaging unit:	65 pcs / tube
Material:	Cover / spring plate / guide plate: stainless steel Contact / terminal: phosphor bronze, min. 0.07µm gold plated over min. 0.3µm nickel Rotor / base: PA66 O-ring: silicone Actuator color: orange
Protection:	IP67

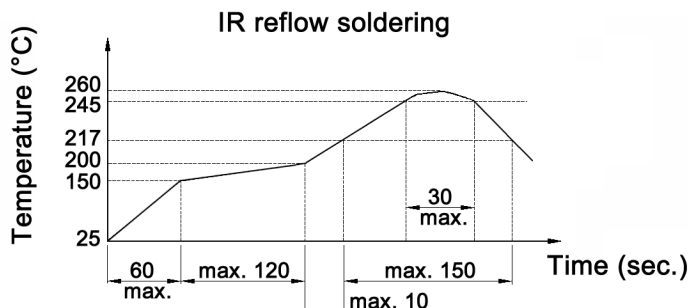

Tolerances:			Date	Name	DRS 15110	
			10/08	dr		
					30 16 25	
					knitter-switch	
					Page	
Modifications	Date	Name			1/1	