
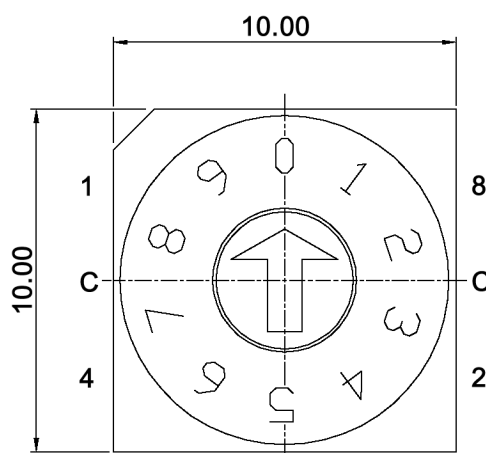
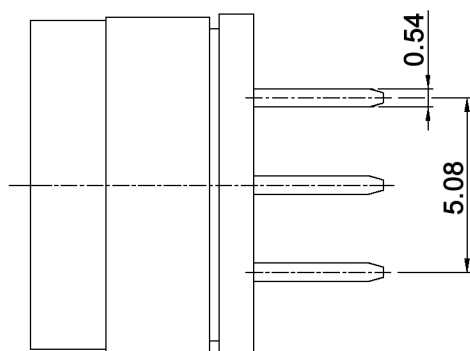
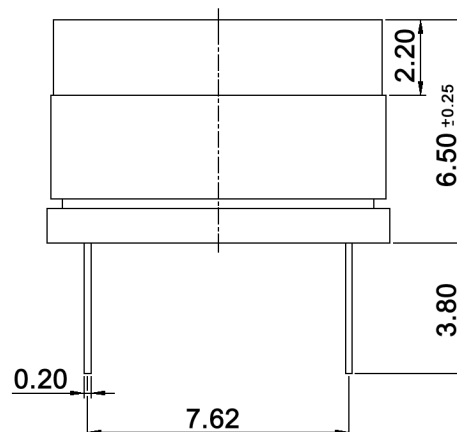


P.C.B. DIMENSION

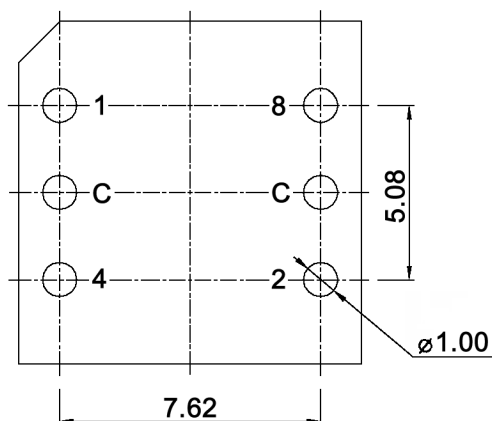

Specifications:

Contact rating:	switching: 25mA, 24V DC non-switching: 100mA, 50V DC
Contact resistance:	80mOhm max.
Insulation resistance:	100MOhm min.
Mechanical life:	10 000 cycles
Operating force:	700gf max.
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Soldering conditions:	pre-heat: max. 120°C, max. 70sec. wave soldering: max. 260°C, max. 10sec.
Color of actuator:	grey
IP rating:	IP67

BCD inverse

	Complement coded				
	C	1	2	4	8
0	•	•	•	•	•
1	•	•	•	•	•
2	•	•	•	•	•
3	•	•	•	•	•
4	•	•	•	•	•
5	•	•	•	•	•
6	•	•	•	•	•
7	•	•	•	•	•
8	•	•	•	•	•
9	•	•	•	•	•



Tolerances:			Date	Name	DRS 60110	
			02/08	dr		
Soldering conditions	01/11	dr	knitter-switch			Page 1/1
IP rating	07/09	dr				
Operating temperature	11/08	dr				
Modifications	Date	Name				
			30 13 83			