




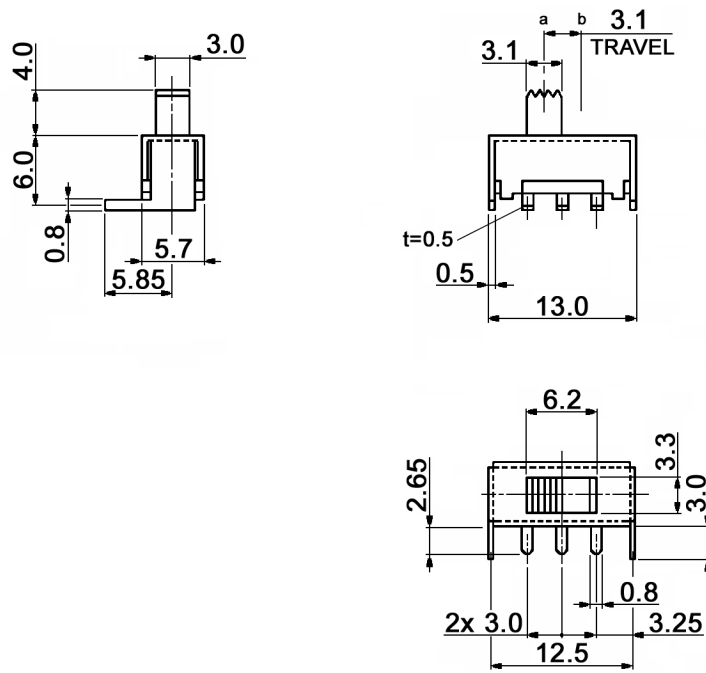

HOLE LAYOUT
TOP VIEW

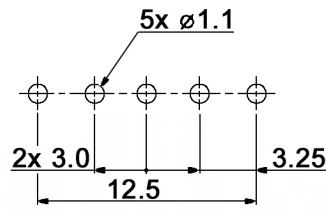

CIRCUIT DIAGRAM
C: COMMON PIN
BOTTOM VIEW



Specifications:

- Contact rating: 0.2A, 30V DC
Contact resistance: 30mOhm max.
Insulation resistance: 100MOhm min. at 500V DC
Dielectric strength: 500V AC (50/60Hz, 2mA) for 1 minute
Operating temperature: -10°C to +60°C
Mechanical life: 5 000 cycles
Operating force: 150 +/-70gf
Soldering conditions: 260°C max., 5 +/-1sec
Timing: non-shortng
Material: Terminal / contact plate: brass strip, silver plated
Frame: SPCC, nickel plated
Base: phenolic resin, natural
Spring: SWC, temper
Slider: nylon, black

Compliance: RohS II (2011/65/EU)

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MFP 121 D-RA	
			06/17	dr		
					knitter-switch	30 38 89
Modifications	Date	Name				Page 1/1