


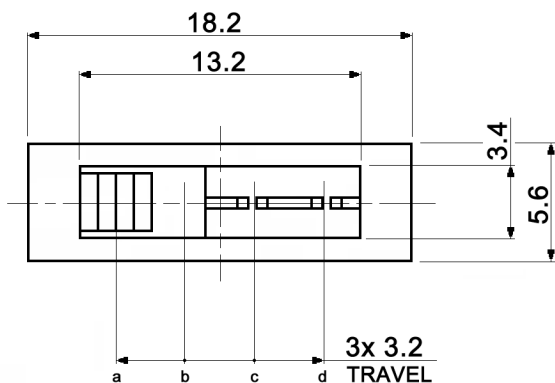
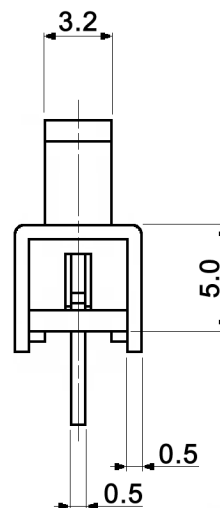


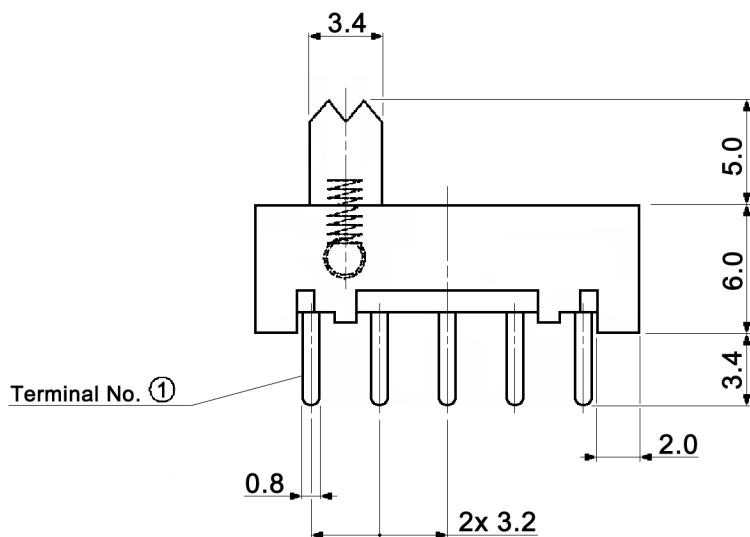

CIRCUIT DIAGRAM
BOTTOM VIEW



HOLE LAYOUT ± 0.05

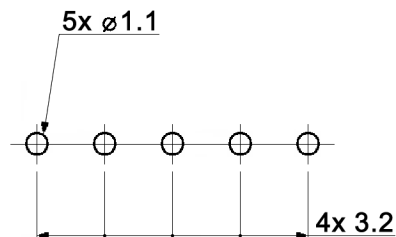

Specifications:

Contact rating:	350mA, 30V DC
Contact resistance:	20mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V, 50Hz for the duration of 1 minute
Operating temperature:	-20°C to +85°C
Mechanical life:	min. 10 000 cycles
Soldering conditions:	auto-soldering: max.: 260 +/-5°C, 3sec.
Contact timing:	non-shorting
Material:	Terminal: brass, silver plated
	Base: phenolic, natural
	Frame: steel, nickel plated
	Contact plate: brass, silver plated
	Spring: SWC, temper
	Slider: PA, black



Tolerances: up to 10: ± 0.2 mm above 10-50: ± 0.3 mm			Date	Name	MFP 140	
			01/10	dr		
					30 19 88	
					knitter-switch	
					Page	
Modifications	Date	Name			1/1	