

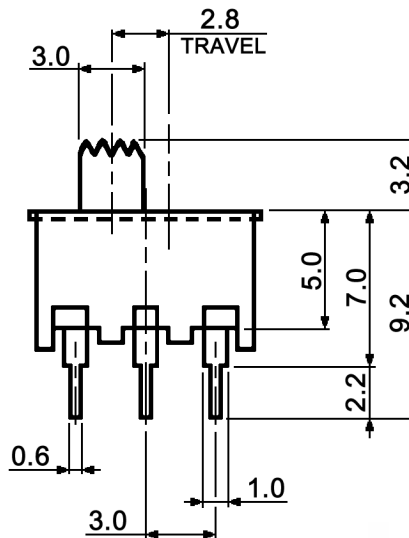
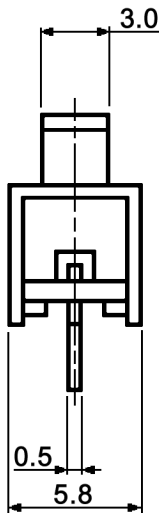


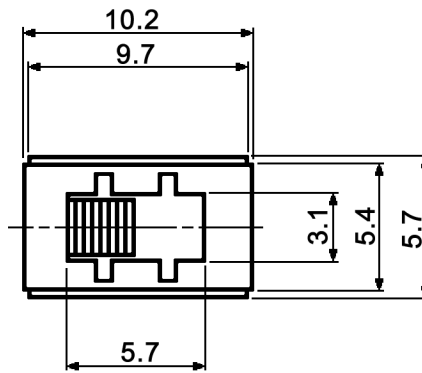

P.C. LAYOUT



Specifications:

Contact rating:	0.3A, 125V AC
Contact resistance:	20mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	500V AC for 1 minute
Mechanical life:	10 000 cycles
Operating force:	350 +/-200gf
Soldering conditions:	260 +/-5°C, 5sec.
Timing:	non-shorting
Material:	Frame: SPCC-SD (t=0.5), zinc plated
	Slider: PBT
	Stator: XPC 94HB (t=1.2)
	Terminal: BSR-EH (t=0.5), silver plated
	Contact: BSR, silver plated
	Spring: SWC, tempering
	Leaf spring: PBS



Tolerances: ±0.3mm			Date	Name	MFP 191 D	
			07/08	dr		
					30 15 49	
Revised	02/11	dr	knitter-switch			Page
Modifications	Date	Name				1/1