

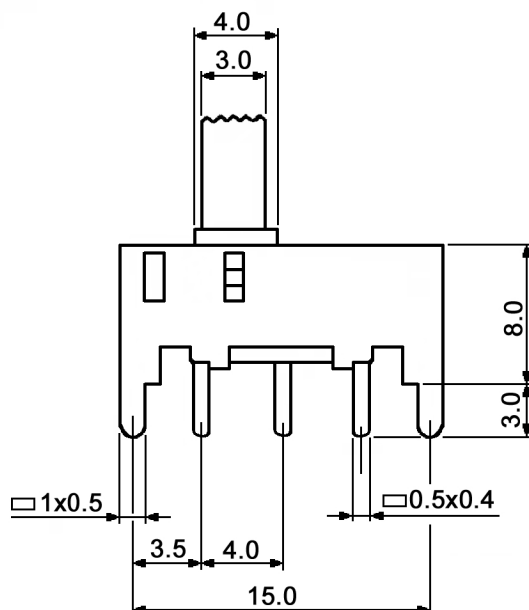
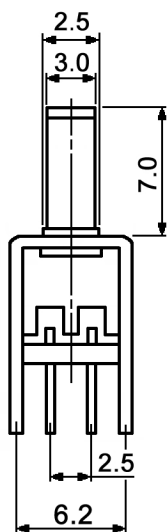


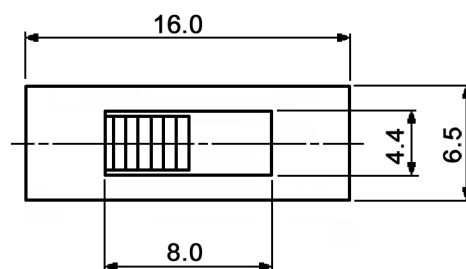


HOLE LAYOUT ± 0.05

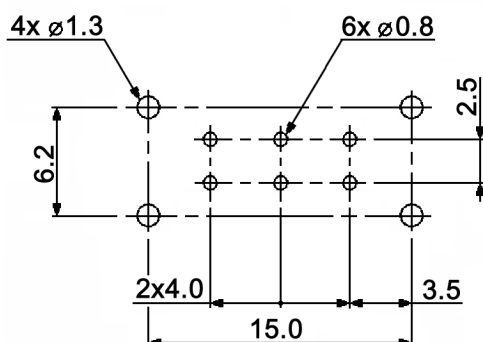

Specifications:

Contact rating:	0.35A, 30V DC
Contact resistance:	20mOhm max.
Insulation resistance:	100MOhm min. at 500V DC for 1 minute
Dielectric strength:	500V AC for 1 minute (50/60Hz, 2mA)
Operating temperature:	-10°C to +60°C
Mechanical life:	10 000 cycles min.
Operating force:	200gf +/-100gf
Soldering heat resistance:	bath method: 260 +/-5°C; 5 +/-1.0sec.
Contact timing:	non - shorting
Switching function:	on - on
Material:	Slider: POM, black Frame: SPCC, nickel plated Steel ball: carbon steel, natural Spring: SWC, temper Contact clip: C5210R-EH, silver plated Base: phenolic resin, natural Terminal: brass strip, silver plated


SCHEMATIC



Tolerances: up to 10: ± 0.2 mm above 10-50: ± 0.3 mm			Date	Name	MFP 211 N	
			07/05	dr		
PCB-layout	10/11	dr			30 06 50	
Packaging	08/08	dr				
Contact rating	06/08	dr				
Specifications	07/07	dr				
Modifications	Date	Name				Page 1/2

knitter-switch

Packaging:

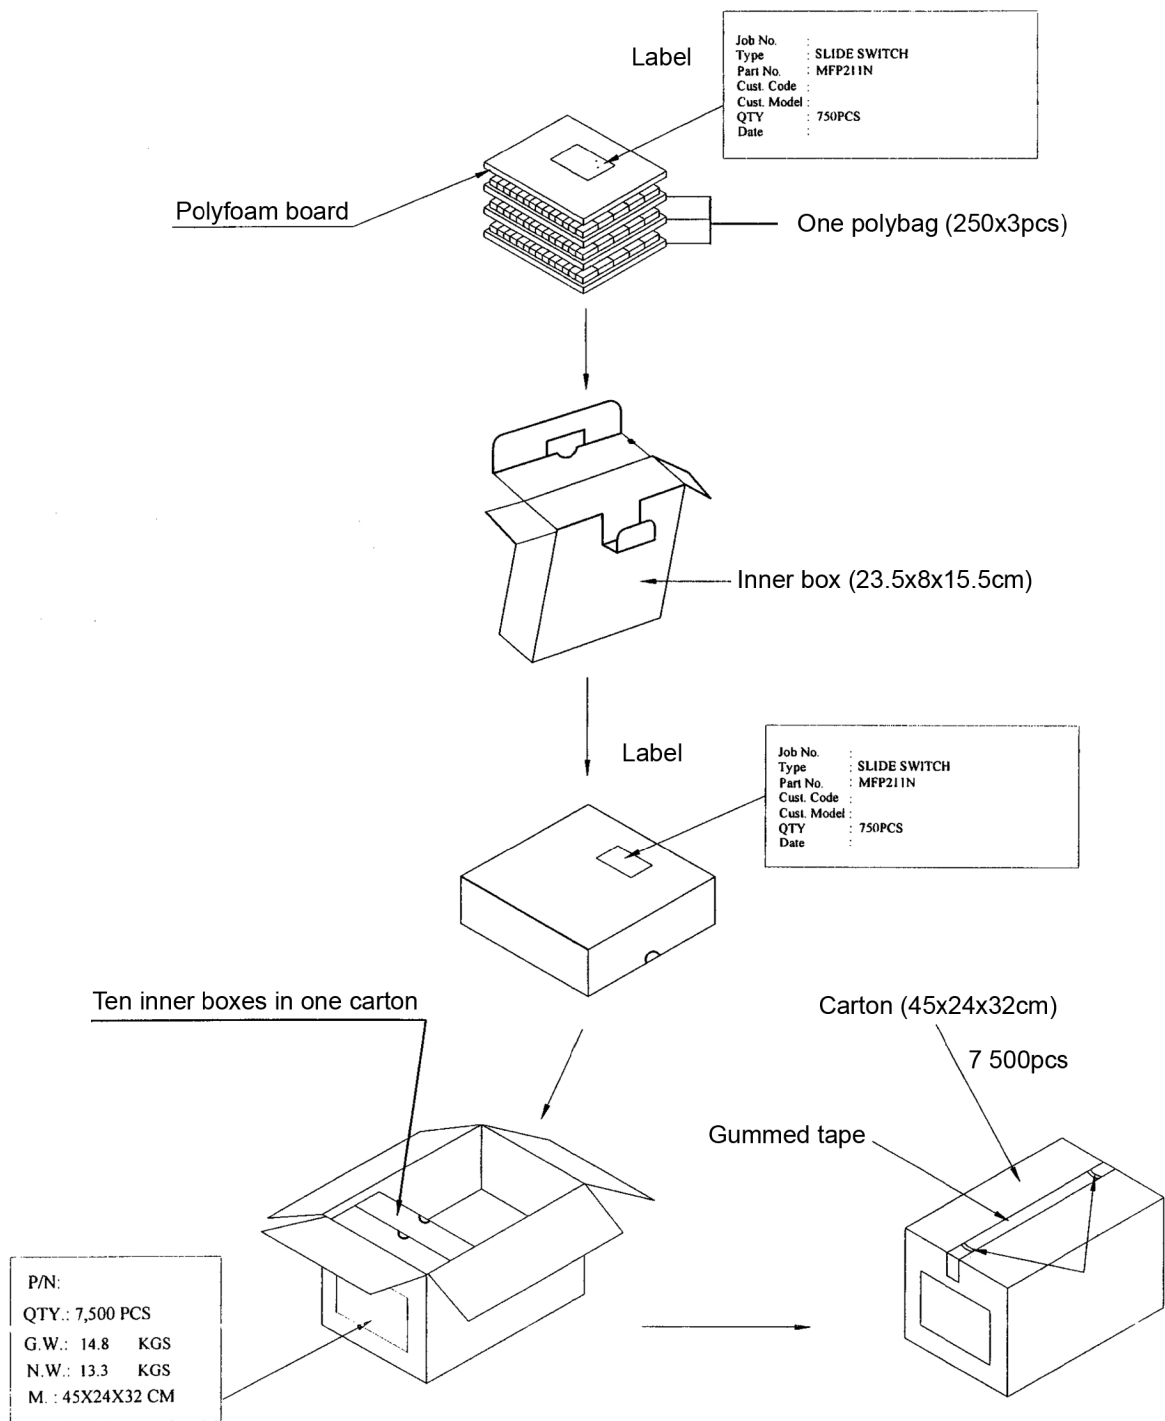

Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm			Date	Name	MFP 211 N	
			08/08	dr		
					30 06 50	
Modifications	Date	Name			Page	
					2/2	