


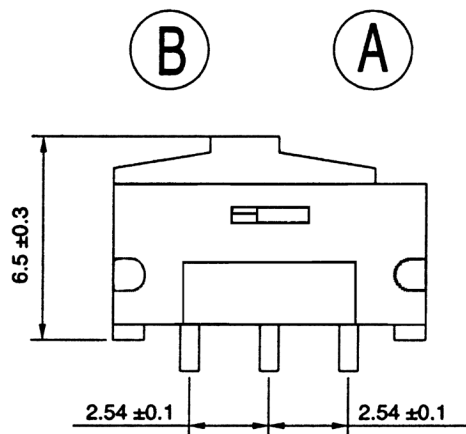
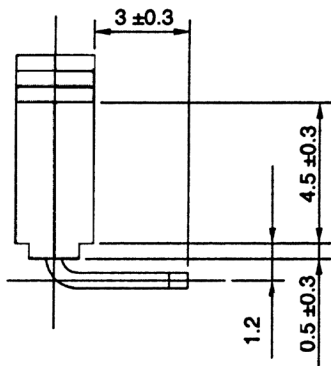





CIRCUIT DIAGRAM

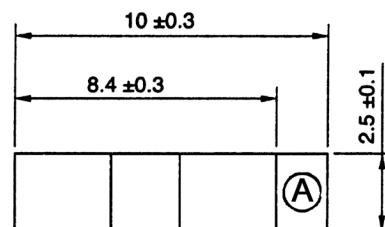

Switch Position



P.C.B. LAY OUT



Specifications:

Contact rating:	0.2A, 24V; 0.5A, 12V
Contact resistance:	50mOhm max.
Insulation resistance:	10 000MOhm min. at 500V DC
Dielectric strength:	500V AC for 1 minute (2mA)
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Mechanical life:	5 000 cycles
Operating force:	800gf max.
Packing:	53 pcs. / tube
Soldering conditions:	max.: 260 +/-3°C, 3sec.
Material:	Case: PA66 glass reinforced nylon, blue Slider: PA46 glass reinforced nylon, ivory Terminals: brass, 0.075µm gold plated over 1µm nickel Fixed contact: brass, 0.075µm gold plated over 1µm nickel Movable contact: phosphor bronze, 0.125µm gold plated over 1µm nickel



Tolerances: 0 - 1: ±0.1mm 1 - 4: ±0.3mm 4 - 16: ±0.5mm			Date	Name	MMP 1010 D-RA	
			01/03	us		
Specifications	01/13	dr	knitter-switch		30 03 41	Page
Slider colour	09/12	dr				1/1
Modifications	Date	Name				