

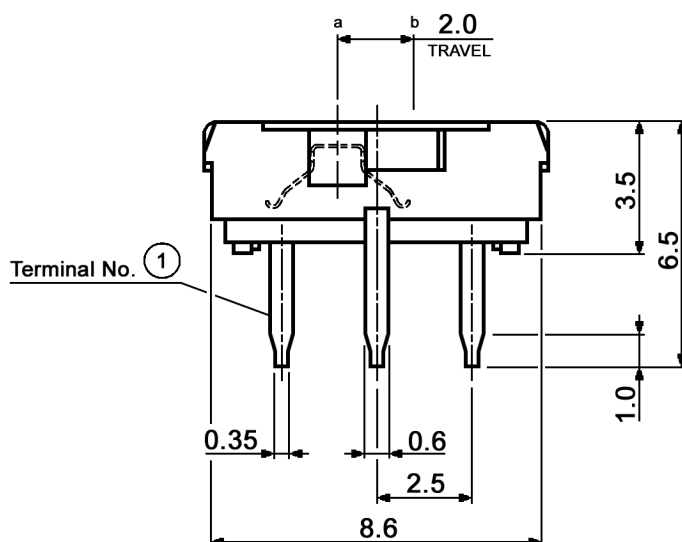
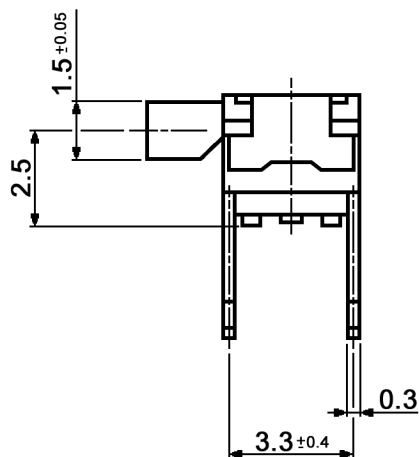


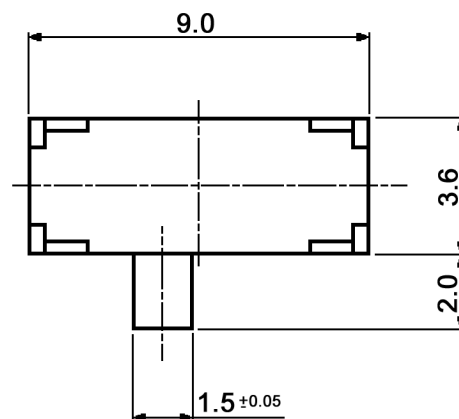


HOLE LAYOUT TOP VIEW ± 0.05

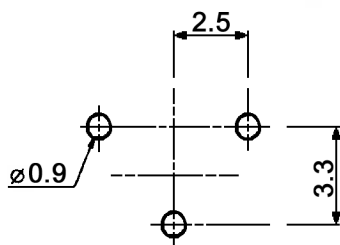

Specifications:

Contact rating:	0.2A, 12V DC
Contact resistance:	50mOhm max.
Insulation resistance:	100MOhm min. at 500V DC for 1 minute
Dielectric strength:	500V AC (50/60Hz, 2mA)
Operating temperature:	-10°C to +60°C
Mechanical life:	5 000 cycles
Electrical life:	5 000 cycles
Operating force:	250 +/-150gf
Soldering conditions:	260 +/-5°C, 5 +/-1sec.
Material:	Terminal: brass strip, silver plated Cover: stainless steel, washing Slider / case: PA, black Contact plate: stainless steel, silver plated

CIRCUIT DIAGRAM C: COMMON PIN BOTTOM VIEW



Tolerances: up to 10: ±0.2mm above 10-50: ±0.3mm	Date 11/12	Name dr	MMP 121-R	
Modifications	Date	Name		

knitter-switch

30 27 42

Page

1/1