



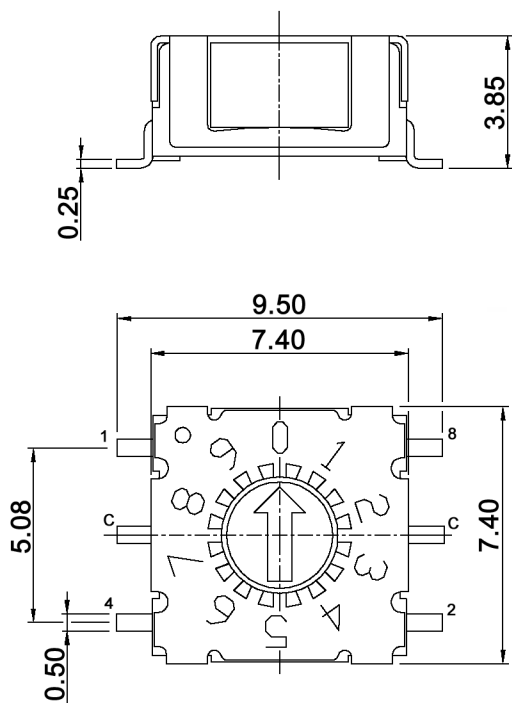


		BCD				
		Real coded				
10 P o s i t i o n s	C	1	2	4	8	
	0	●				
	1	●	●			
	2	●		●		
	3	●	●	●		
	4	●			●	
	5	●	●		●	
	6	●		●	●	
	7	●	●	●	●	
	8	●				●
	9	●	●			●

P.C.B. DIMENSION

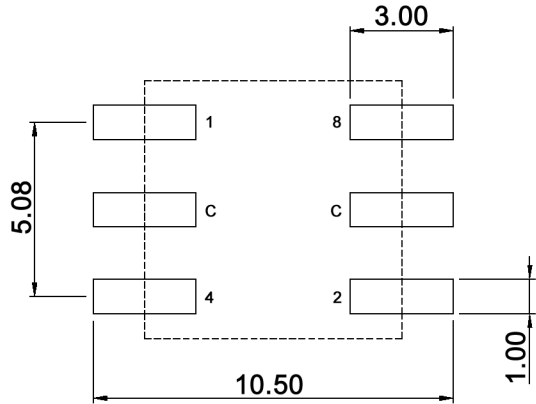

Specifications:



- Contact rating:
- non-switching: 400mA, 42V
switching: 100mA, 42V
- Contact resistance:
- 80mOhm max.
- Insulation resistance:
- 100MOhm min. at 250V DC for 1 minute +/-5sec.
- Dielectric strength:
- 250V DC (50Hz/60Hz) for 1 minute
- Operating temperature:
- 50°C to +125°C
- Storage temperature:
- 55°C to +135°C
- Mechanical life:
- 25 000 cycles
- Operating force:
- 120 +/-30gf/cm
- Material:
- Cover / spring plate / guide plate: stainless steel
Contact / terminal: phosphor bronze, min. 0.07µm gold plated
over min. 0.3µm nickel
Rotor / base: LCP, UL94V-0
O-ring: silicone
Actuator color: pink
- Protection:
- IP67
- Soldering conditions:

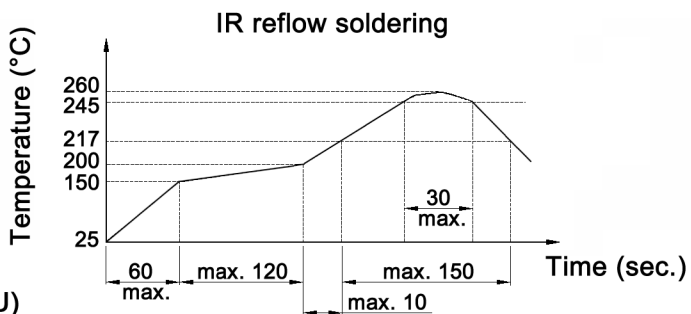

Compliance: RohS II (2011/65/EU)

Tolerances:			Date	Name	SMR 15010					
			10/08	dr						
Packaging	02/15	dr			knitter-switch			30 16 16		Page
Packaging	06/12	dr								1/2
Soldering conditions	10/09	dr								
Material	05/09	dr								
Modifications	Date	Name								

Packaging:

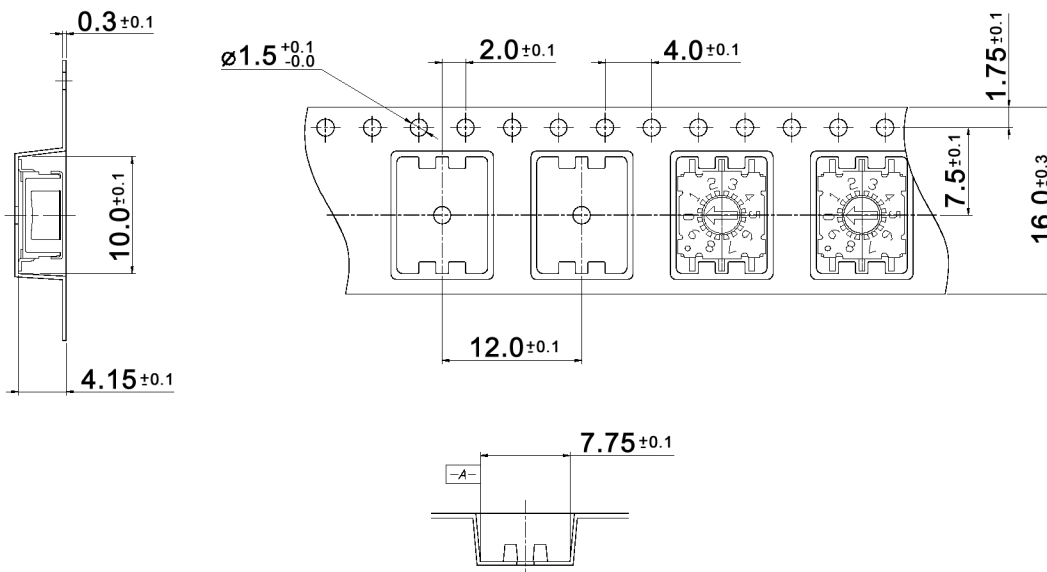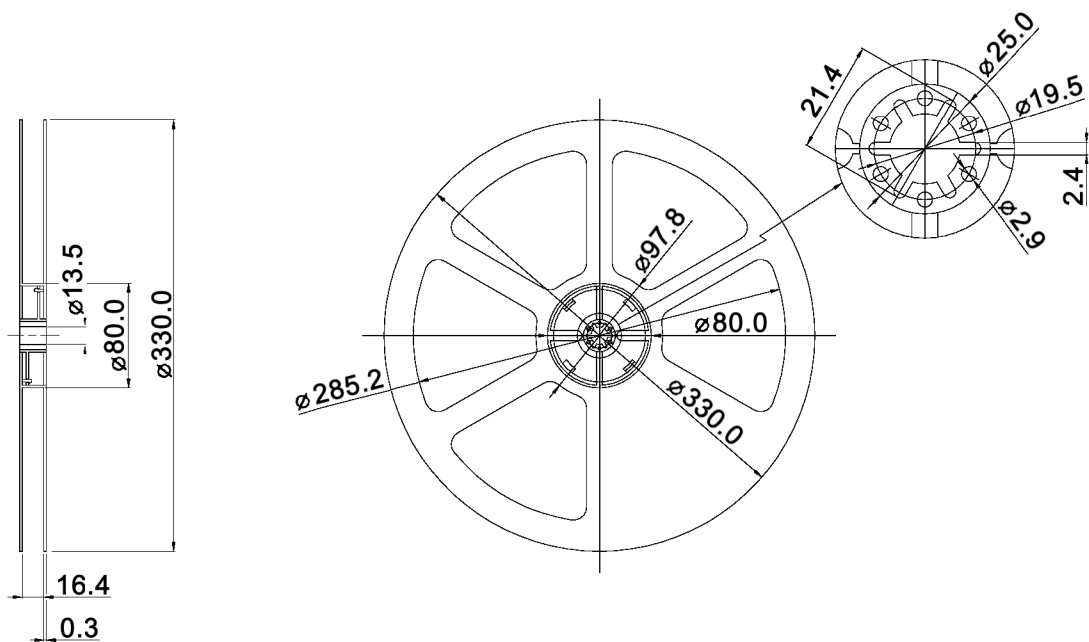

Type	Packaging unit
SMR 15010	70 pcs. per stick
SMR 15010 T	1300 pcs. per reel

Tolerances on tape: $\pm 0.20\text{mm}$
Compliance: RohS II (2011/65/EU)

Tolerances: 0.0: ±0.13mm 0.00: ±0.10mm			Date 10/08	Name dr	SMR 15010		
			knitter-switch		30 16 16		Page
							2/2
Modifications	Date	Name					