
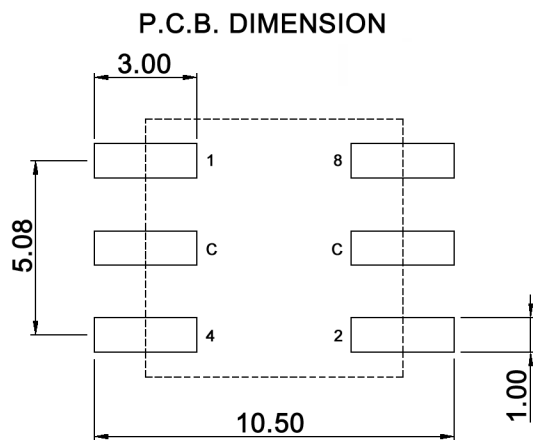


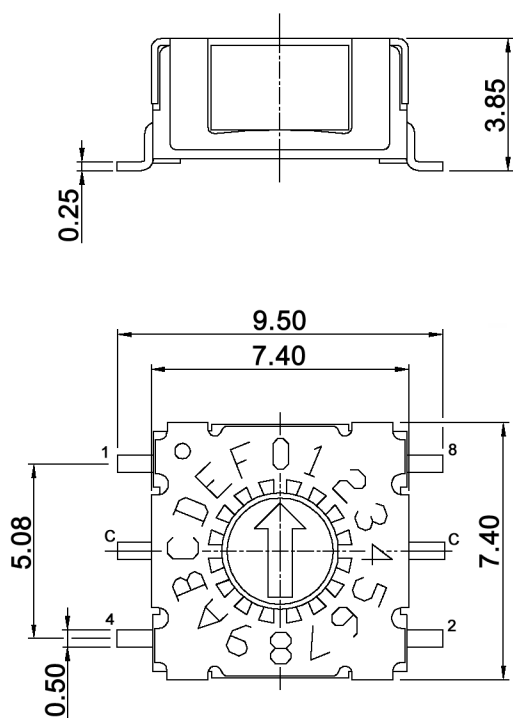


Hexadecimal

	Real coded				
	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	
6	●		●	●	
7	●	●	●	●	
8	●				●
9	●	●			●
A	●		●		●
B	●	●	●		●
C	●			●	●
D	●	●		●	●
E	●		●	●	●
F	●	●	●	●	●

Specifications:

- Contact rating: non-switching: 400mA, 42V
switching: 100mA, 42V
- Contact resistance: 80mOhm max.
- Insulation resistance: 100MOhm min. at 250V DC for 1 minute +/-5sec.
- Dielectric strength: 250V DC (50Hz/60Hz) for 1 minute
- Operating temperature: -50°C to +125°C
- Storage temperature: -55°C to +135°C
- Mechanical life: 25 000 cycles
- Operating force: 120 +/-30gf/cm
- Material: Cover / spring plate / guide plate: stainless steel
Contact / terminal: phosphor bronze, min. 0.07µm gold plated
over min. 0.3µm nickel
Rotor / base: LCP, UL94V-0
O-ring: silicone
Actuator color: gray
- Protection: IP67

Soldering conditions:

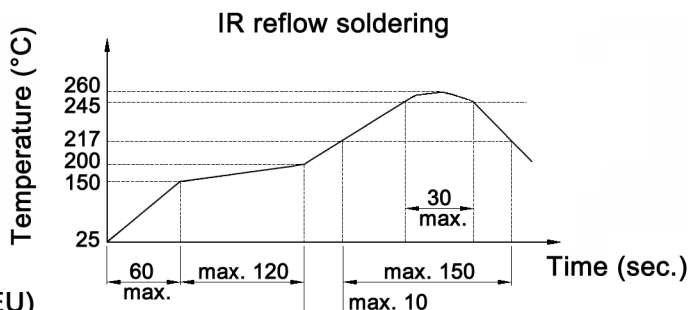

Compliance: RohS II (2011/65/EU)

Tolerances:			Date	Name	SMR 15016	
			10/08	dr		
Packaging	02/15	dr			30 16 18	
Packaging	06/12	dr				
Soldering conditions	10/09	dr				
Material	05/09	dr				
Modifications	Date	Name				Page
						1/2



knitter-switch

30 16 18

Page

1/2

Packaging:

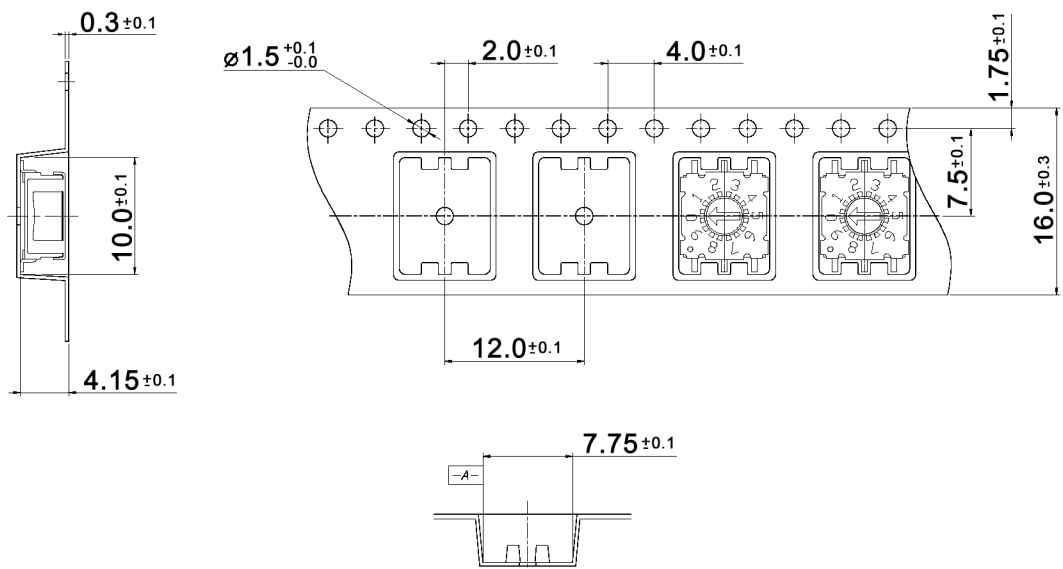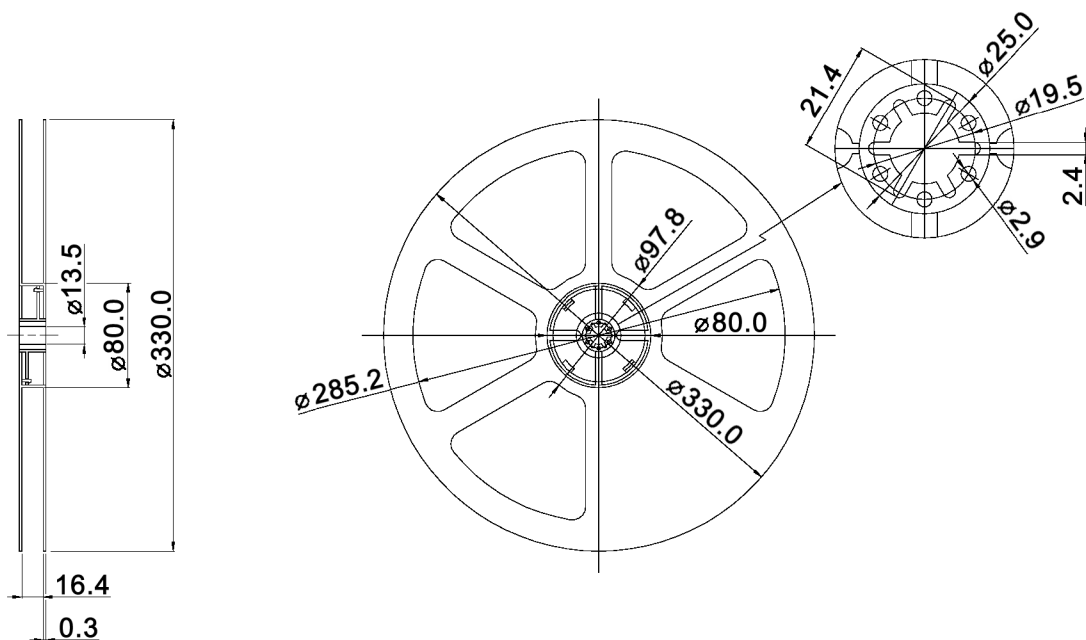

Type	Packaging unit
SMR 15016	70 pcs. per stick
SMR 15016 T	1300 pcs. per reel

Tolerances on tape: $\pm 0.20\text{mm}$
Compliance: RohS II (2011/65/EU)

Tolerances: 0.0: ±0.13mm 0.00: ±0.10mm			Date 10/08	Name dr	SMR 15016		
			knitter-switch		30 16 18		Page
							2/2
Modifications	Date	Name					