

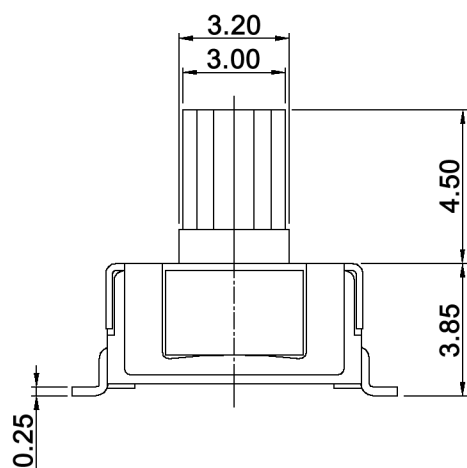


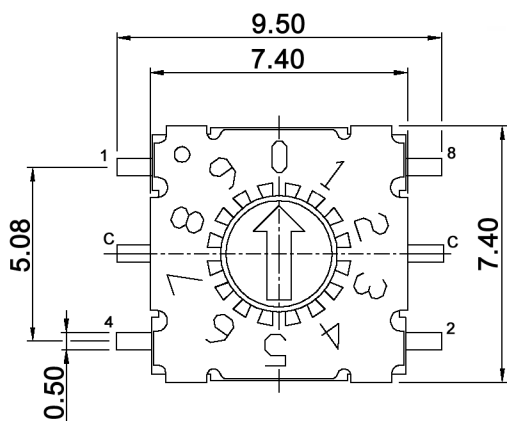

P.C.B. DIMENSION

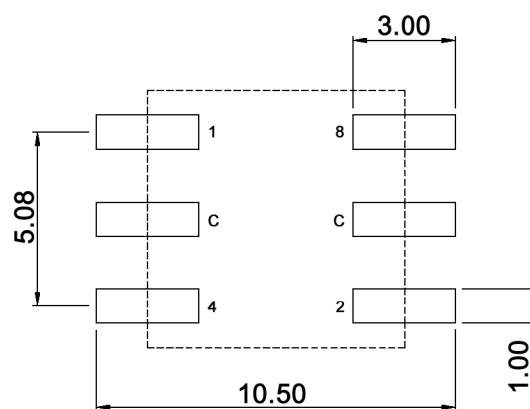

BCD inverse

		Complement coded				
		C	1	2	4	8
10 P o s i t i o n s	0	●	●	●	●	●
	1	●	●	●	●	●
	2	●	●	●	●	●
	3	●	●	●	●	●
	4	●	●	●	●	●
	5	●	●	●	●	●
	6	●	●	●	●	●
	7	●	●	●	●	●
	8	●	●	●	●	●
	9	●	●	●	●	●




Tolerances:			Date	Name	SMR 16110 T	
			10/08	dr		
Packaging	05/10	dr	knitter-switch		30 16 21	Page
Soldering conditions	10/09	dr				1/3
Material	05/09	dr				
Modifications	Date	Name				

Specifications:


Contact rating:	non-switching: 400mA, 42V switching: 100mA, 42V
Contact resistance:	80mOhm max.
Insulation resistance:	100MOhm min. at 250V DC for 1 minute +/-5sec.
Dielectric strength:	250V DC (50Hz/60Hz) for 1 minute
Operating temperature:	-50°C to +125°C
Storage temperature:	-55°C to +135°C
Mechanical life:	25 000 cycles
Operating force:	120 +/-30gf/cm
Packaging unit:	600 pcs / reel
Material:	Cover / spring plate / guide plate: stainless steel Contact / terminal: phosphor bronze, min. 0.07µm gold plated over min. 0.3µm nickel Rotor / base: LCP, UL94V-0 O-ring: silicone Actuator color: orange
Protection:	IP67

Soldering conditions:

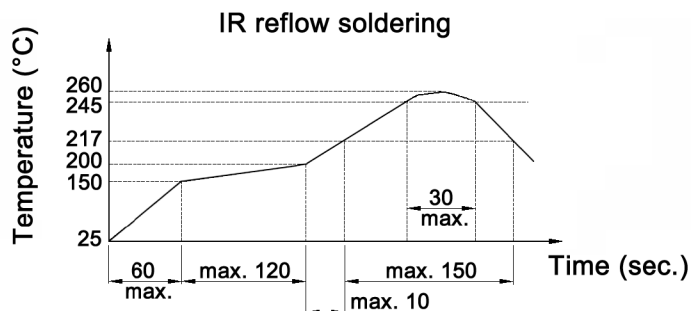

Tolerances:			Date	Name	SMR 16110 T	
			10/08	dr		
			knitter-switch		30 16 21	
					Page	
					2/3	
Modifications	Date	Name				

Packaging:

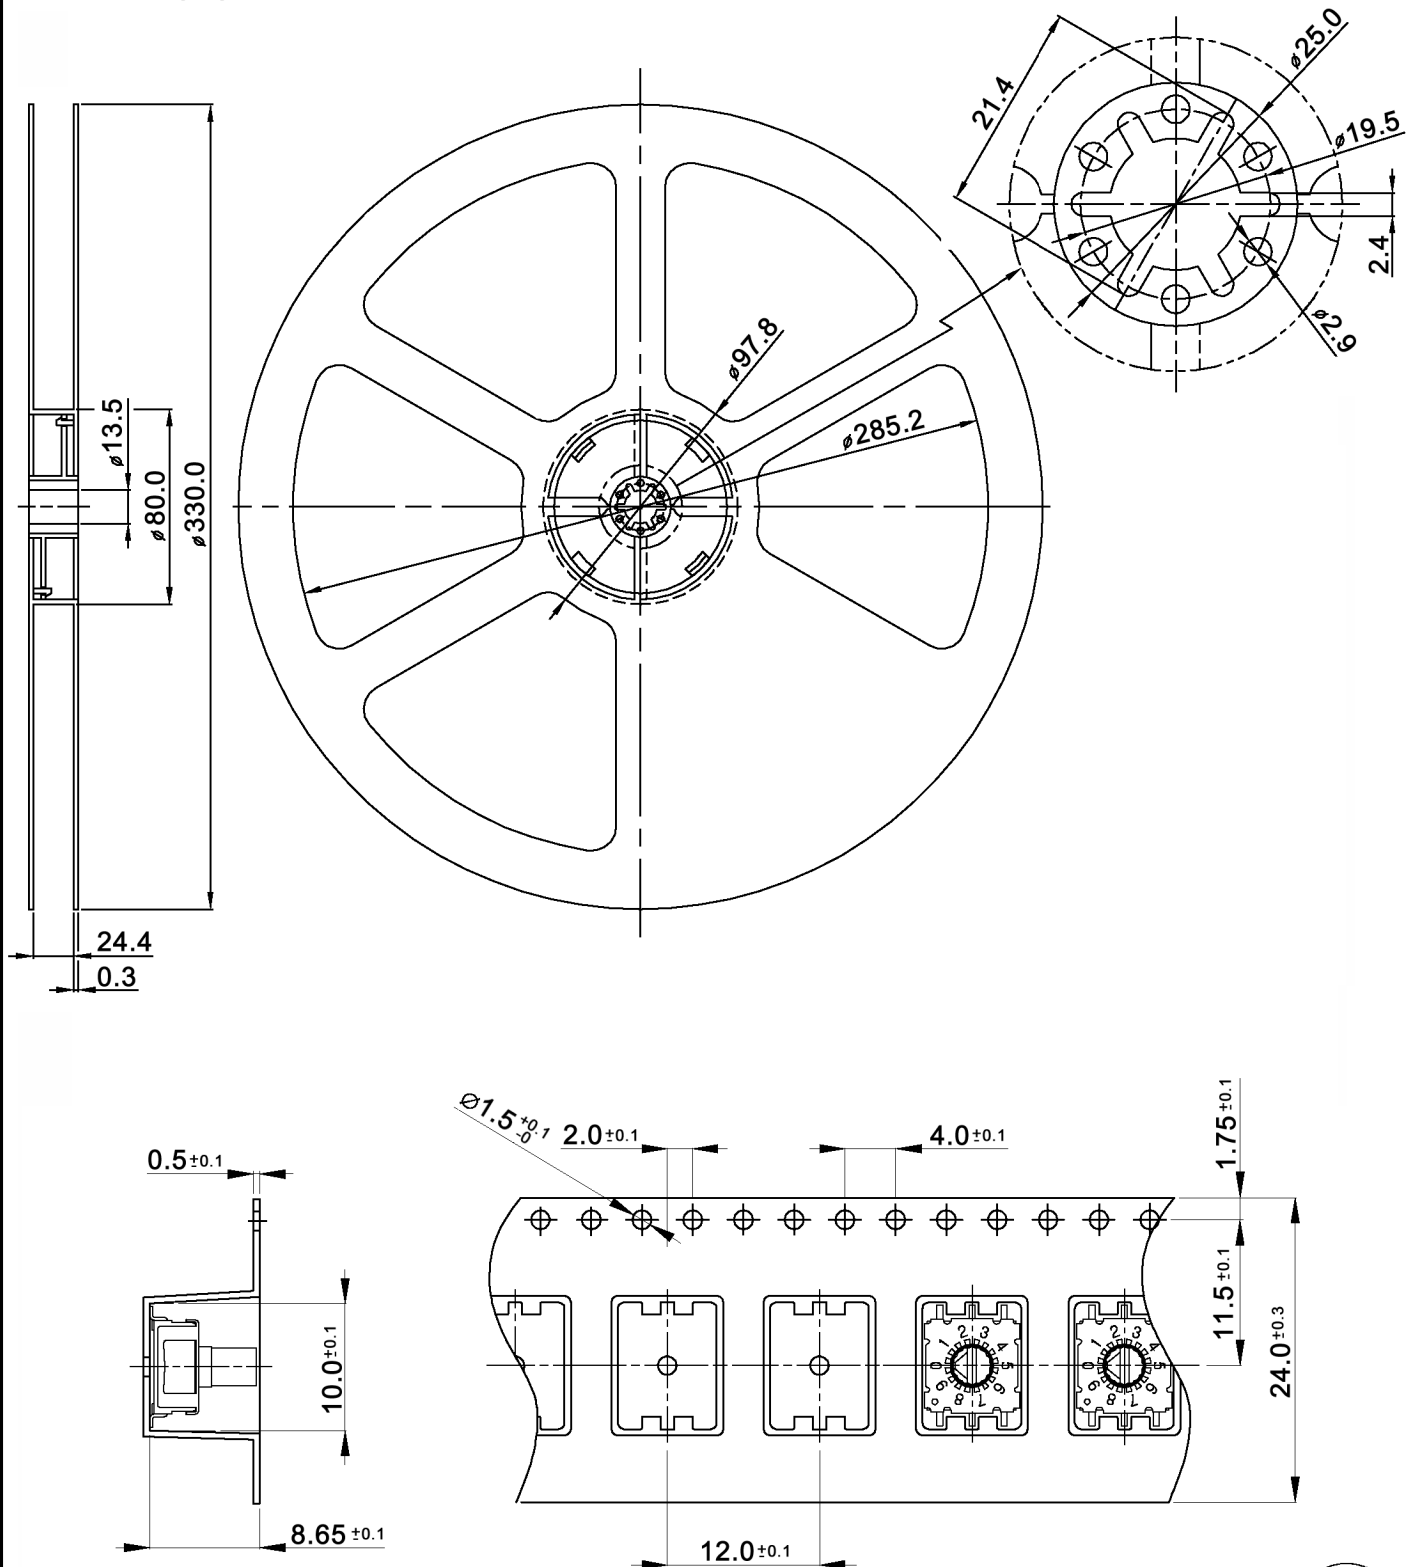

Packaging unit: 600 pcs. / reel

Tolerances:			Date	Name	SMR 16110 T		
			05/10	dr			
			knitter-switch		30 16 21		Page
							3/3
Modifications	Date	Name					

knitter-switch

30 16 21

Page

3/3