

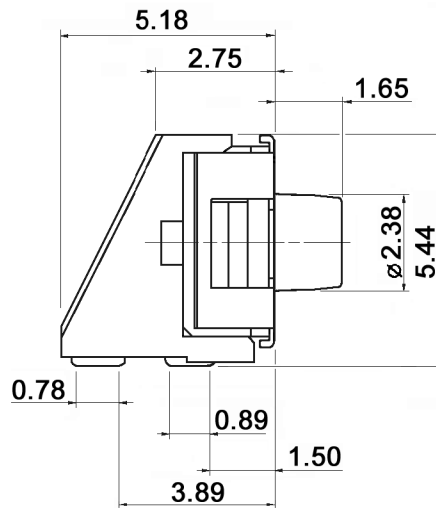
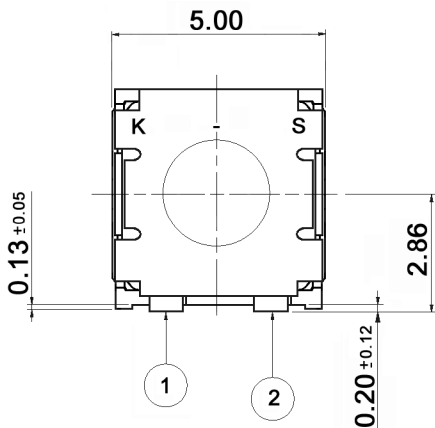
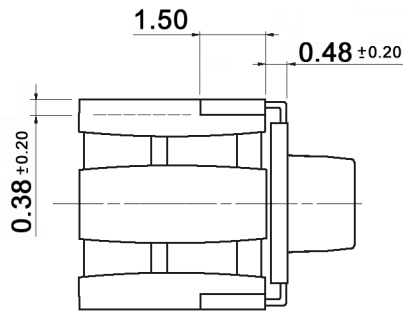


P.C. LAYOUT



SCHEMATIC



2-digit date code:
- first digit indicates year of manufacture
- second digit indicates month of manufacture




Tolerances: $\pm 0.30\text{mm}$ except where noted			Date 12/05	Name dr	TMSE 10 J-RA	
Tolerances	11/11	dr				
Dimension	11/10	dr				
Dimensions	07/10	dr	knitter-switch		30 07 48	Page
Digit date code	11/09	dr				1/3
Material	10/06	dr				
Modifications	Date	Name				

Specifications:


Contact rating:	24V DC, 100mA max.
Contact resistance:	<100mOhm
Insulation resistance:	>100MOhm at 500V DC
Dielectric strength:	250V AC, 50Hz for the duration of 1 minute
Operating temperature:	-55°C to +125°C
Electrical life:	min. 100 000 cycles
Operating force:	3 +/-1N
Contacts:	silver plated
Terminals:	gold plated
Mounting:	on pc-board - SMD
Material:	Cover: stainless steel
	Base: high-temp. thermoplastic nylon meets UL94V-0, washable
	Stem: silicone rubber

Soldering conditions:

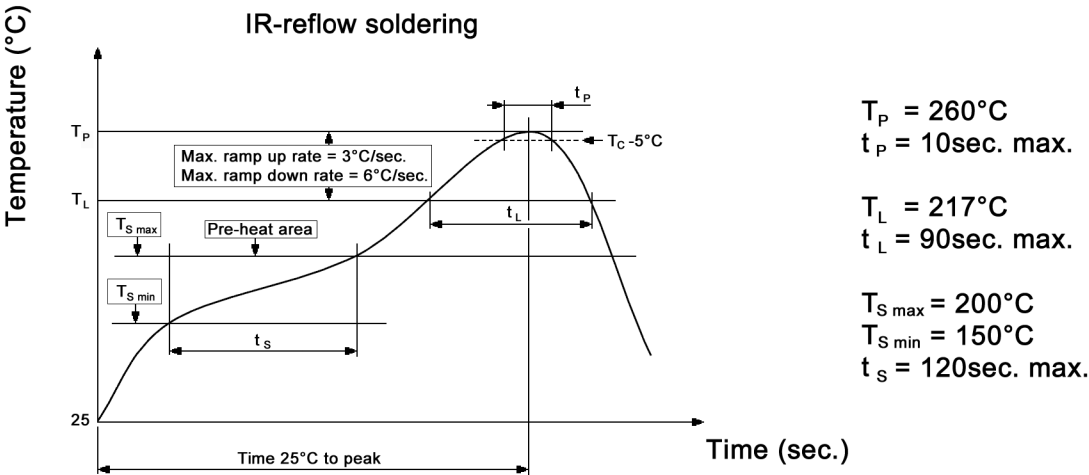

Tolerances: $\pm 0.20\text{mm}$ except where noted			Date	Name	TMSE 10 J-RA	
			12/05	dr		
					30 07 48	
					knitter-switch	
Modifications	Date	Name				Page 2/3

Packaging:

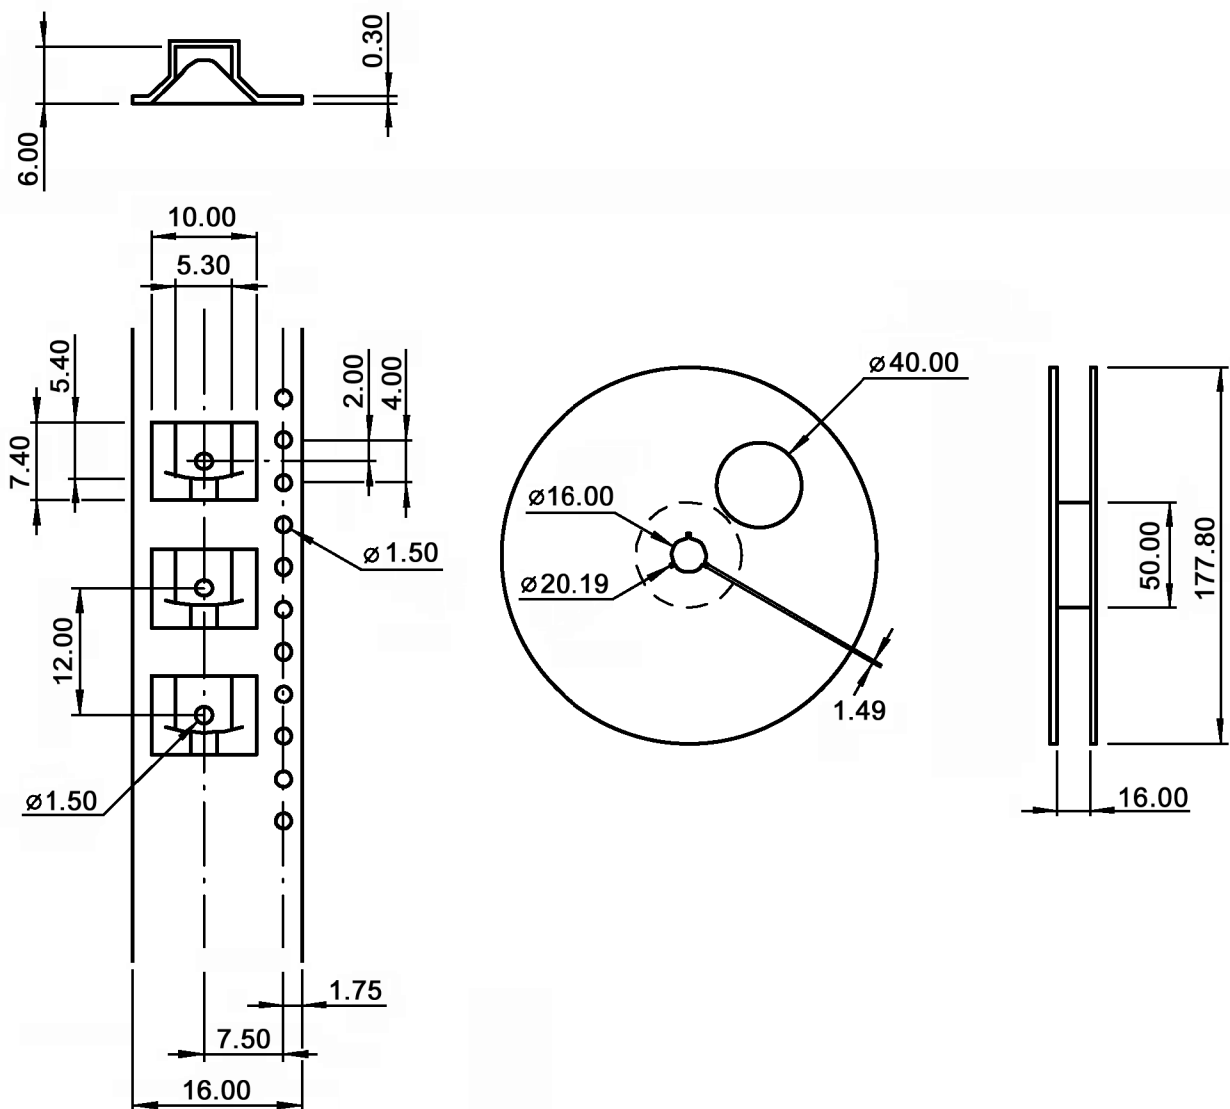

Packaging unit: 200 pcs. / reel



Tolerances: ±0.20mm except where noted			Date	Name	TMSE 10 J-RA		
			12/05	dr			
			knitter-switch		30 07 48		Page
							3/3
Modifications	Date	Name					