


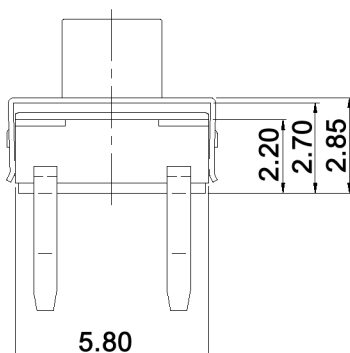
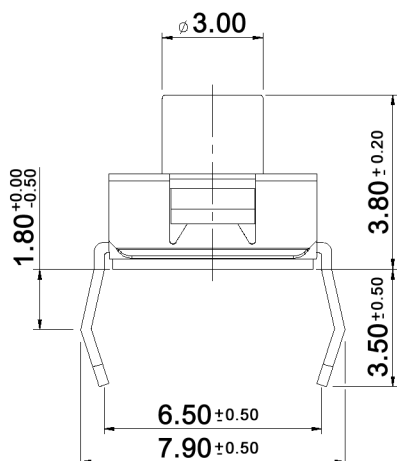


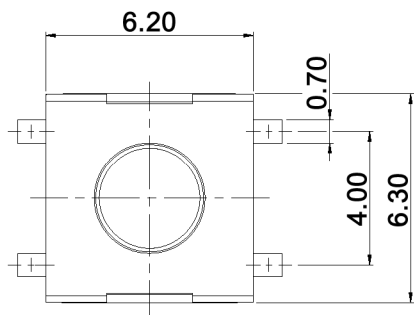

P.C.B. LAYOUT



CIRCUIT DIAGRAM




Specifications:

Contact rating:	50mA, 12V DC
Contact resistance:	100mOhm max.
Insulation resistance:	100MOhm min. at 500V DC
Dielectric strength:	250V AC for 1 minute
Operating temperature:	-40°C to +85°C
Electrical life:	500 000 cycles min.
Operating force:	260 +/-70 gf; color of actuator: red
Soldering conditions:	wave soldering: 260°C, 5sec.
Stroke:	0.45 +/-0.20mm
Material:	Cover: stainless steel
	Terminal: brass silver plated
	Base: UL94V-0 nylon high-temp. thermoplastic, black
	Stem: silicone rubber
	Contact: phosphor bronze silver cladding



Tolerances: ±0.20mm			Date	Name	TSE 69 R	
			03/08	dr		
					30 14 23	
Specifications	01/09	dr	knitter-switch			Page
Modifications	Date	Name				1/2

Packaging:

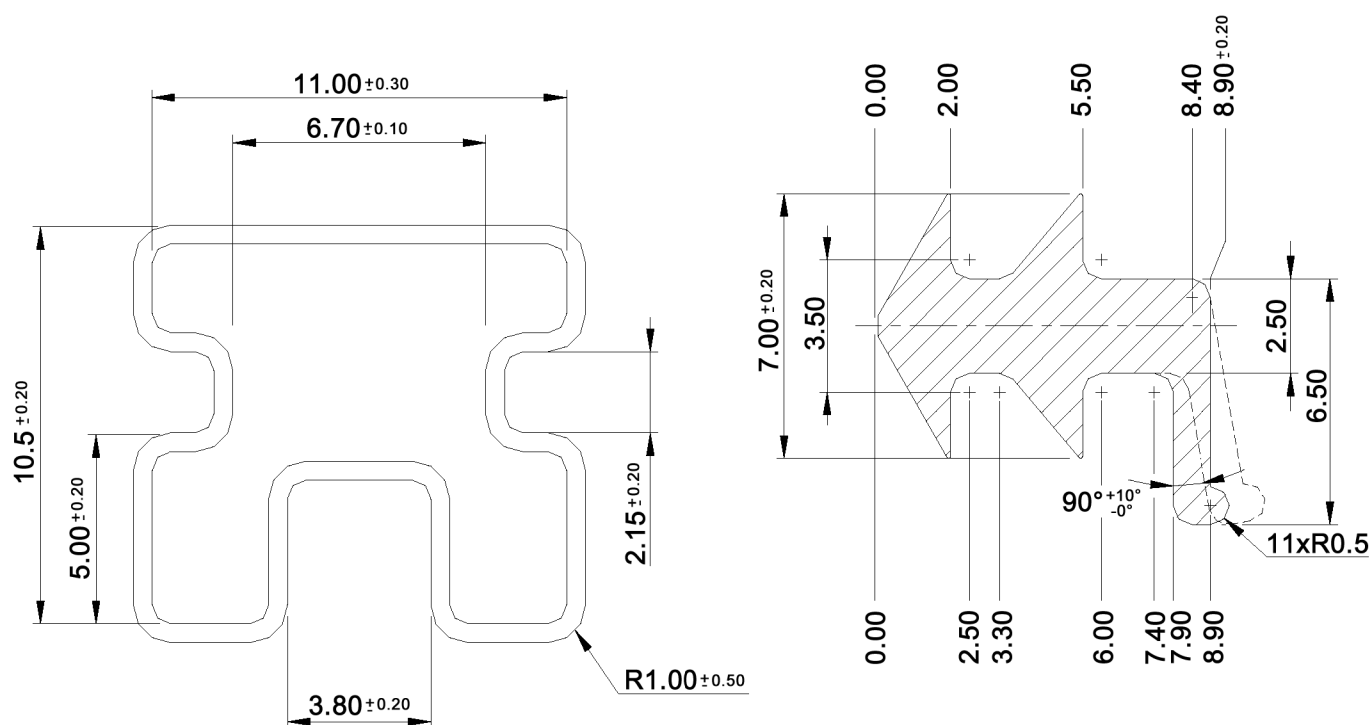

Packaging unit: 75 pcs / tube



Tolerances: ±0.20mm			Date	Name	TSE 69 R		
			03/08	dr			
			knitter-switch		30 14 23		Page
							2/2
Modifications	Date	Name					

knitter-switch

TSE 69 R

30 14 23

Page

2/2