




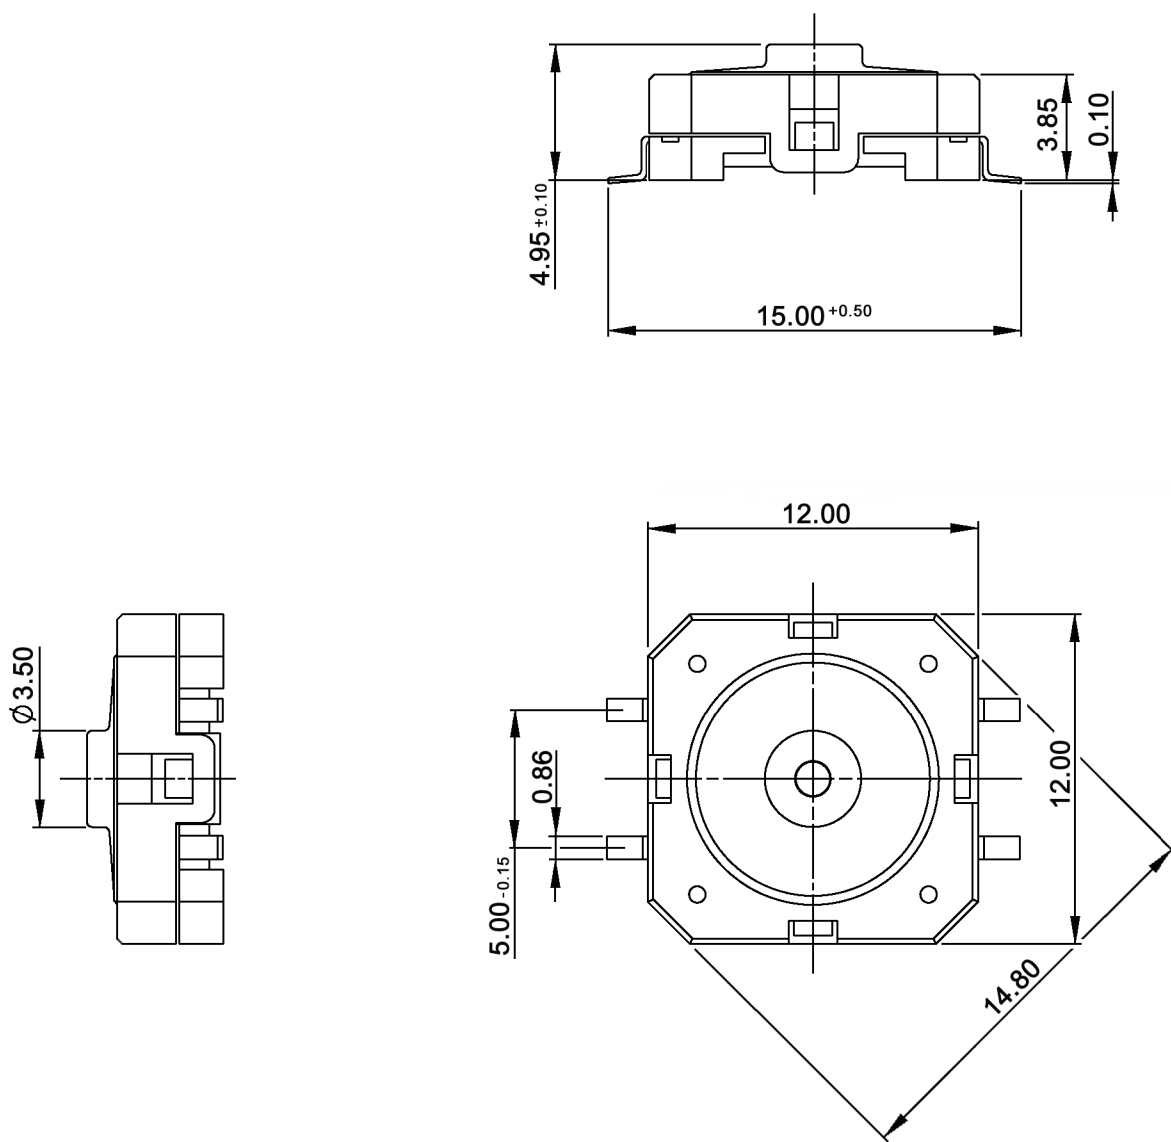

P.C.B. LAYOUT

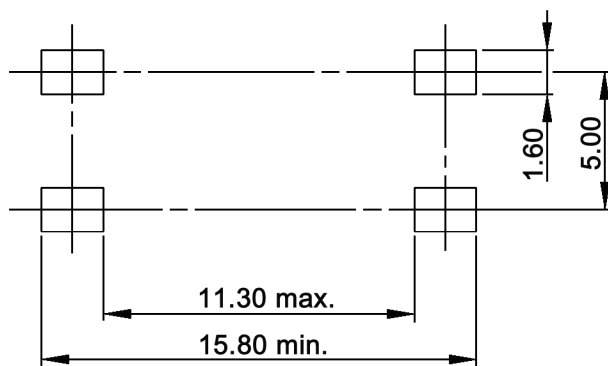

CIRCUIT DIAGRAM




Tolerances: <10: ±0.2mm 10-30: ±0.3mm			Date	Name	TSSE 12 S	
			11/08	dr		
Packaging	05/12	dr	knitter-switch		30 16 57	Page
Specifications	07/11	dr				1/3
Plating	01/11	dr				
Modifications	Date	Name				

Specifications:


Contact rating:	100mA, 42V DC/AC max. (0.01mA, 0.02V DC/AC min.)
Switching power:	1W max.
Contact resistance:	100mOhm max.
Insulation resistance:	1 000MOhm
Dielectric strength:	150V AC (50Hz)
Operating temperature:	-40°C to +80°C
Mechanical life:	1 000 000 cycles
Operating force:	3.6 +/-0.7N
Stop strength:	100N
Travel:	0.61 +/-0.1mm
Bounce:	5ms max.
Packaging unit:	750 pcs. / reel
Material:	All plastic material UL94HB
	Contact: stainless steel, gold plated over nickel
	Terminal: brass, tin over nickel

Soldering conditions:

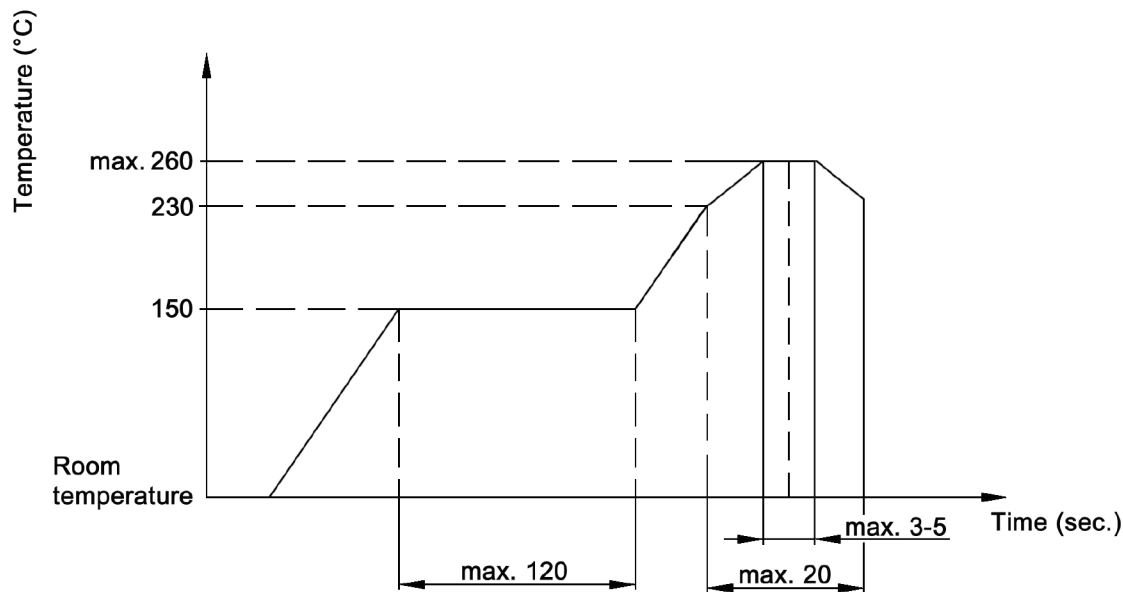

Tolerances: <10: ±0.2mm 10-30: ±0.3mm			Date	Name	TSSE 12 S		
			11/08	dr			
			knitter-switch		30 16 57		Page
							2/3
Modifications	Date	Name					

Packaging:

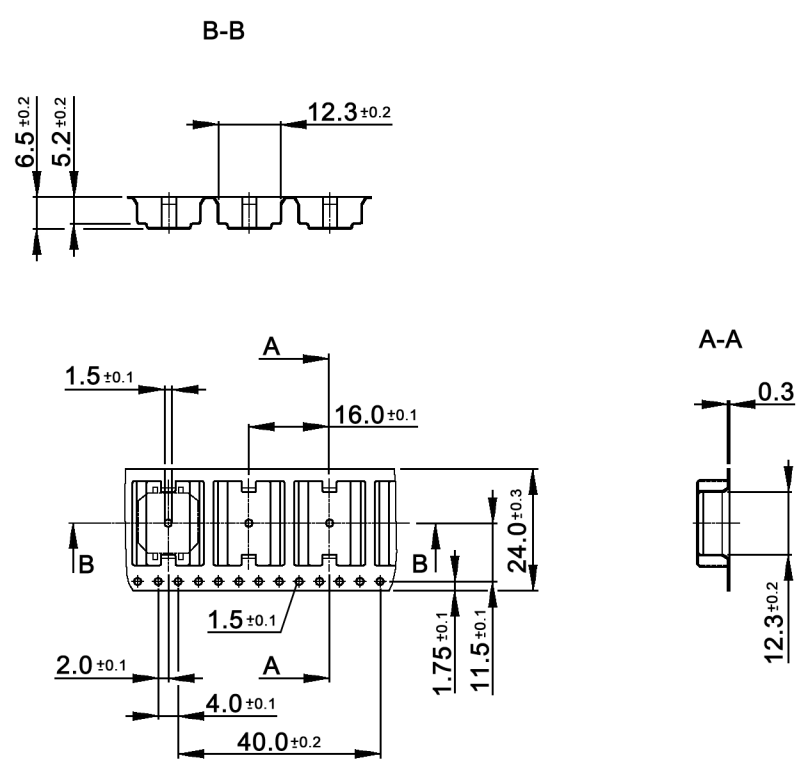

Tolerances: <10: ±0.2mm 10-30: ±0.3mm			Date	Name	TSSE 12 S	
			11/08	dr		
			knitter-switch		30 16 57	Page
						3/3
Modifications	Date	Name				