

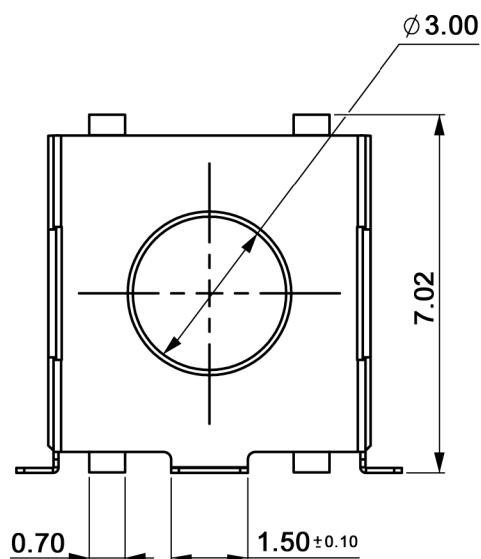
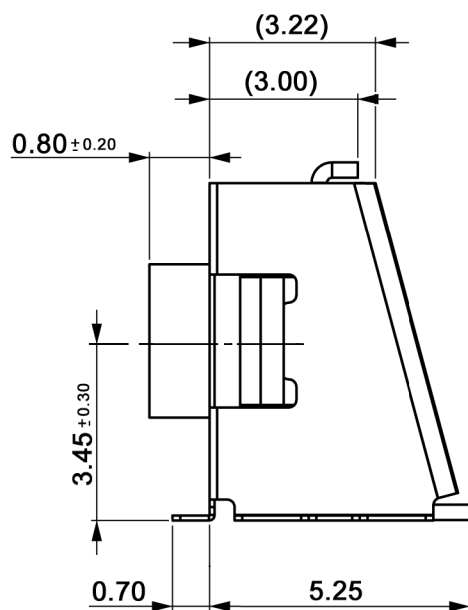
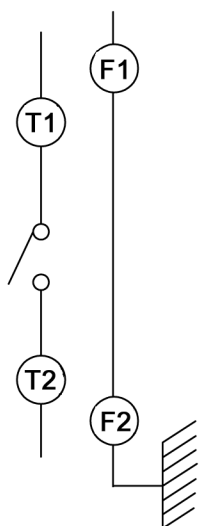


CIRCUIT DIAGRAM

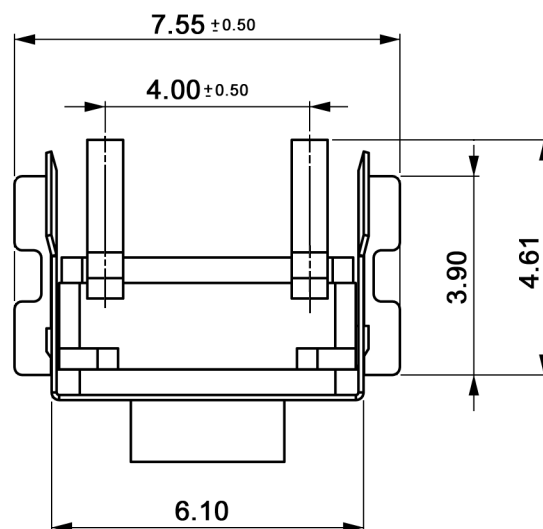

P.C.B. LAYOUT

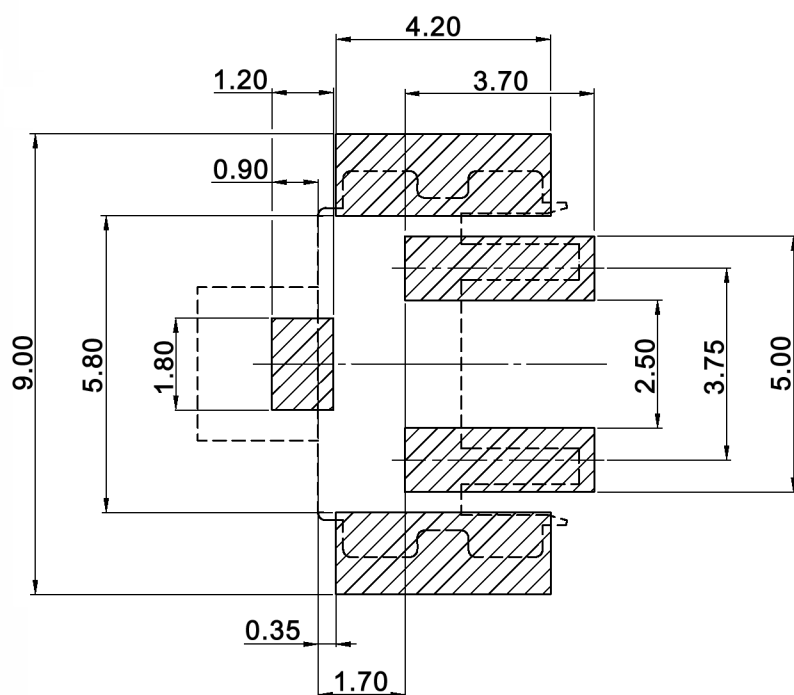

Tolerances: ±0.20mm

Date	Name
04/12	dr

TSSE 608 x-RA-1

knitter-switch

30 26 07

Page


1/2

Modifications	Date	Name

Specifications:

Contact rating:	50mA, 12V DC
Contact resistance:	100mOhm max.
Insulation resistance:	100MOhm min. at 500V DC for 1 minute
Dielectric strength:	250V AC (50Hz or 60Hz) for 1 minute
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Mechanical life:	500 000 cycles
Travel:	0.45 +/-0.2mm
Material:	Cover: nickel silver
	Sealed rubber: silicone rubber hardness: 70°-60°
	Contact: phosphor bronze, silver plated
	Terminal: brass, silver plated
	Base: high-temp. thermoplastic PA9T UL94V-0, molded black

Soldering conditions:

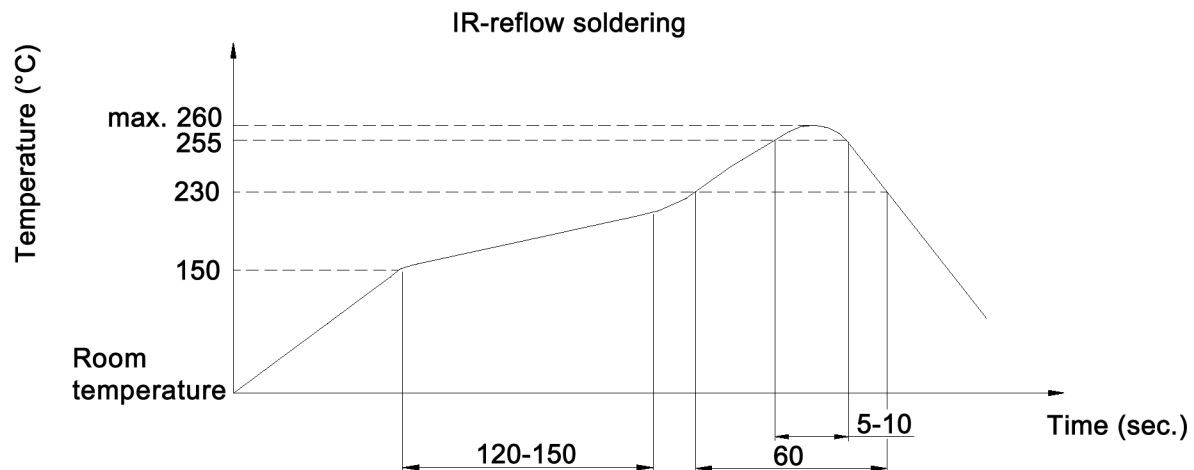

x	Operating force (gf)	Stem colour
R	260 +/-70	red
N	180 +/-50	brown
RK	260 +/-70	black
NK	180 +/-50	black



Tolerances: ±0.20mm			Date	Name	TSSE 608 x-RA-1	
			04/12	dr		
			knitter-switch		30 26 07	
						Page
						2/2
Modifications	Date	Name				