

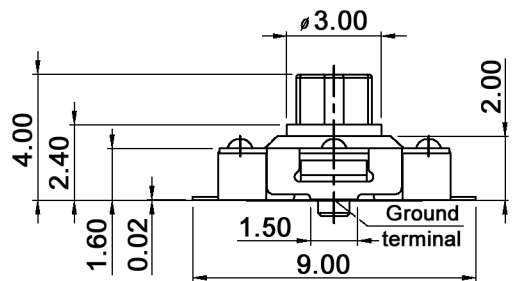

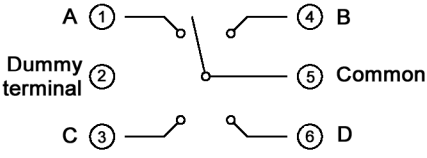




DIAGRAM CIRCUIT

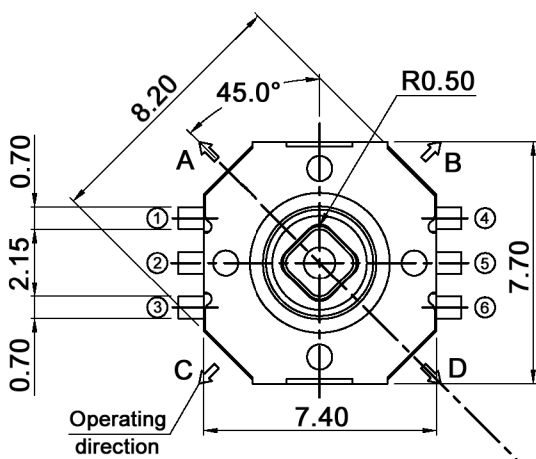

1.40 max.
Fitting margin
for key top

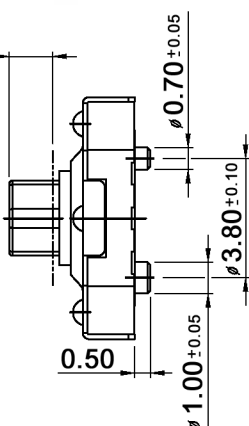

P.C.B. LAYOUT

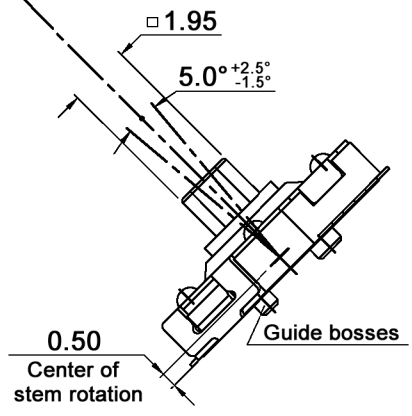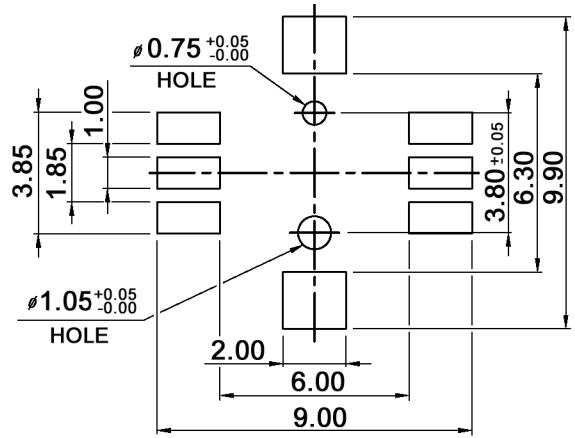


Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm			Date	Name	TSSJ 4				
			09/05	dr					
Cycles	06/17	dr			30 06 98				
Revised	05/16	dr							
Operating temperature	07/15	dr	knitter-switch					Page	
Soldering conditions	11/13	dr							
Modifications	Date	Name				1/2			

Specifications:

Contact rating:	50mA, 12V DC
Contact resistance:	100mOhm max.
Insulation resistance:	100MOhm min.
Dielectric strength:	250V AC (50 or 60 Hz) for 1 minute
Operating temperature:	-40°C to +85°C
Storage temperature:	-40°C to +85°C
Mechanical life:	100 000 cycles min. (per direction)
Operating force:	160 +/-50gf
Stroke:	4 directions: 0.25 +0.1/-0.20mm
Material:	Cover: nickel plated
	Stem: high-temp. thermoplastic LCP
	Contact: stainless
	Terminal: brass, silver plated
	Base: high-temp. thermoplastic LCP, molded black

Soldering conditions:

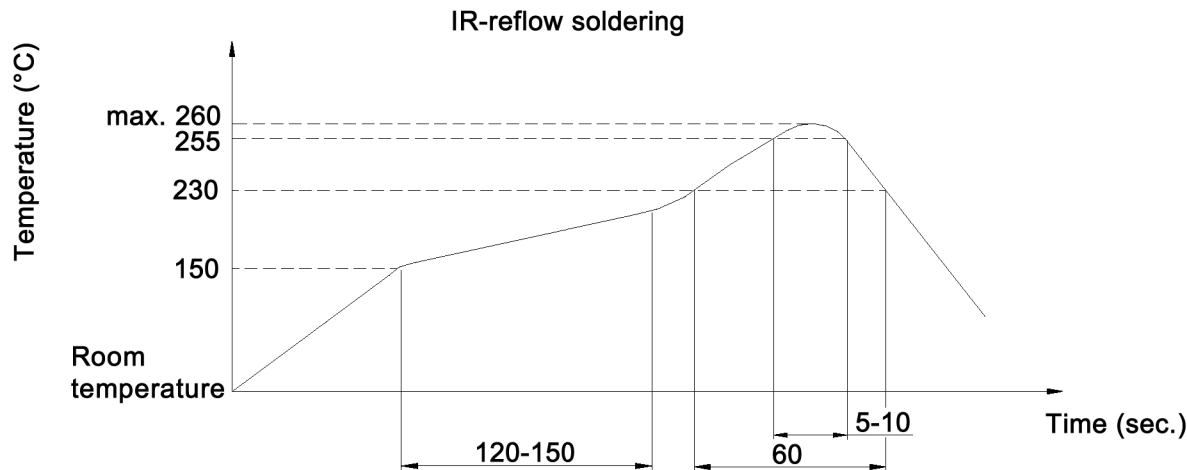

Compliance: RohS II (2011/65/EU)

Tolerances: max. ±0.20mm			Date	Name	TSSJ 4		
			09/05	dr			
			knitter-switch			30 06 98	
							Page
Modifications	Date	Name					