

# PRODUCT DATASHEET C11608\_ANNA-50-3-W

## **ANNA-50-3-W**

~30° wide beam with 3 optics

#### **TECHNICAL SPECIFICATIONS:**

Dimensions Ø 50.0 mm

Height 10.7 mm

Fastening glue, pin

ROHS compliant yes <sup>1</sup>

#### **MATERIAL SPECIFICATIONS:**

ComponentTypeMaterialColourFinishANNA-50-3-WMulti-lensPMMAclear

#### **ORDERING INFORMATION:**

Component

C11608\_ANNA-50-3-W

» Box size: 480 x 280 x 300 mm


Qty in box	MOQ	MPQ	Box weight (kg)
512	96	32	5.7

Last update: 26/10/2019 Subject to change without prior notice LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.



# PRODUCT DATASHEET

C11608\_ANNA-50-3-W

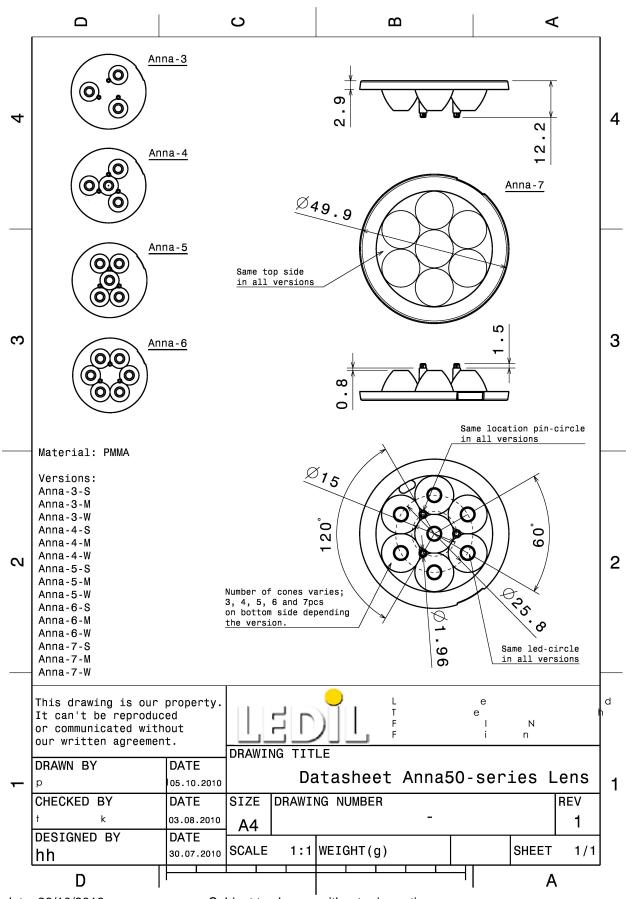

Last update: 26/10/2019

Subject to change without prior notice

# PRODUCT DATASHEET C11608\_ANNA-50-3-W

### PHOTOMETRIC DATA (MEASURED):

# CREE 💠


LED XB-D
FWHM 29.0°
Efficiency 85 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

## CREE ÷


LED XP-E
FWHM 36.0°
Efficiency 87 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1

LEDs/each optic 1 Light colour White Required components:



# CREE 🕏


LED XP-G
FWHM 36.0°
Efficiency 87 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:



## **DESCRIPTION** LUMILEDS

LED LUXEON A
FWHM 34.0°
Efficiency 82 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:



# PRODUCT DATASHEET


C11608\_ANNA-50-3-W

### PHOTOMETRIC DATA (MEASURED):

#### **LUMILEDS**

LED LUXEON Rebel


**FWHM** 30.0° Efficiency 86 % Peak intensity 1.9 cd/lm LEDs/each optic 1 Light colour White Required components:



#### **MUMILEDS**

LED LUXEON Rebel ES

**FWHM** 29.0° 86 % Efficiency Peak intensity 2.2 cd/lm LEDs/each optic 1 White Light colour Required components:



#### **WNICHIA**

LED NCSxx19A **FWHM** 28.0° Efficiency 86 % Peak intensity 1.7 cd/lm LEDs/each optic 1 Light colour White

**WNICHIA** 

Required components:

LED NVSxx19A **FWHM** 33.0° Efficiency 86 % 1.4 cd/lm Peak intensity LEDs/each optic 1 White Light colour Required components:



# PRODUCT DATASHEET C11608\_ANNA-50-3-W


## PHOTOMETRIC DATA (MEASURED):

#### OSRAM Opto Semiconductors

Opto Semiconducto

OSLON SSL 150

FWHM 34.0°
Efficiency 89 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:



#### OSRAM Opto Semiconductors

LED OSLON SSL 80

FWHM 26.0°
Efficiency 87 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:



# PRODUCT DATASHEET

C11608\_ANNA-50-3-W

#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

#### Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

www.ledil.com/ where\_to\_buy