

ANGELINA-M-B

~30° medium beam compatible with BJB connectors

TECHNICAL SPECIFICATIONS:


Dimensions	Ø 82.0 mm
Height	31 mm
Fastening	socket
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish	Coating
ANGELINA-M-B	Reflector	PC	metal		HMDS

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
F13660_ANGELINA-M-B » Box size: 480 x 280 x 300 mm	2035	110	55	10.0

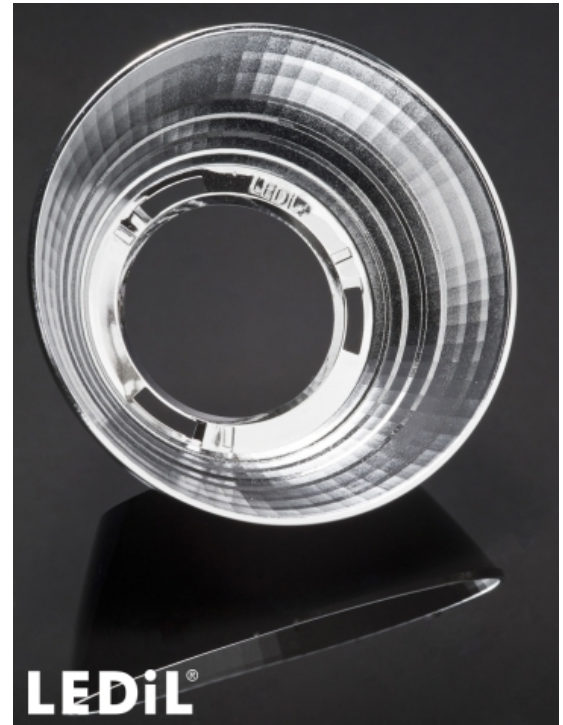


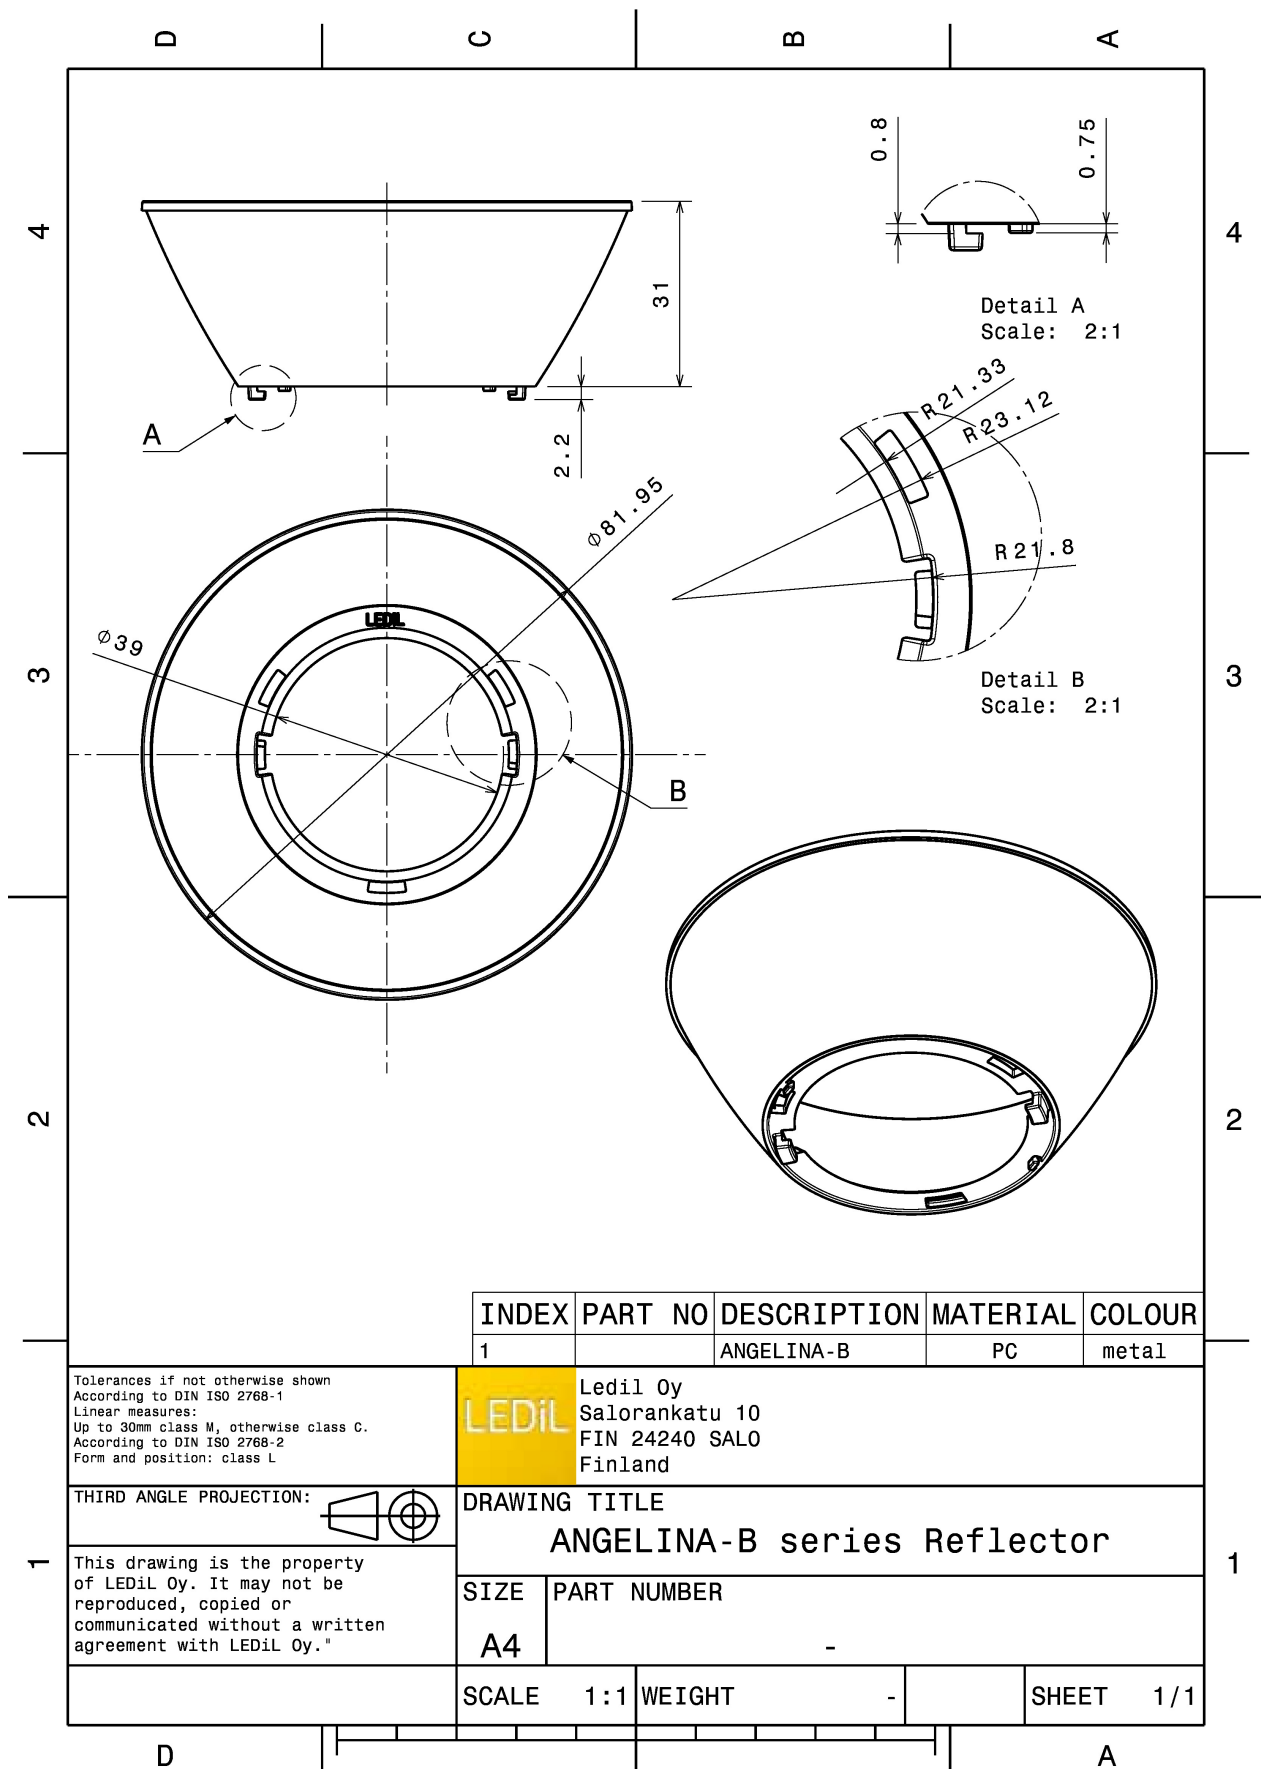



PHOTOMETRIC DATA (MEASURED):





LED BXRA ES Rectangle
 FWHM 38.0°
 Efficiency 92 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2040

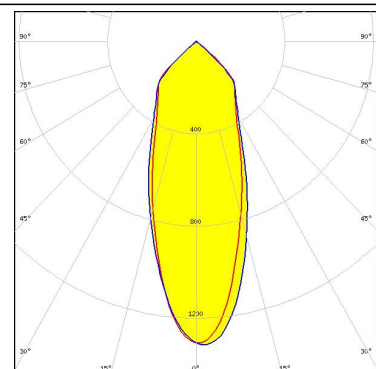



LED V15 Gen6
 FWHM 41.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2224

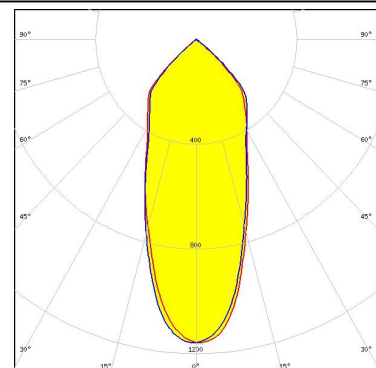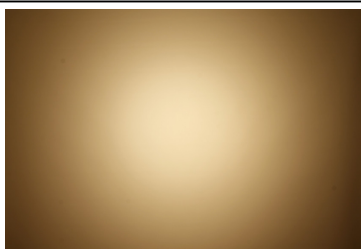

LED V18 Gen6
 FWHM 44.0°
 Efficiency 93 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2274

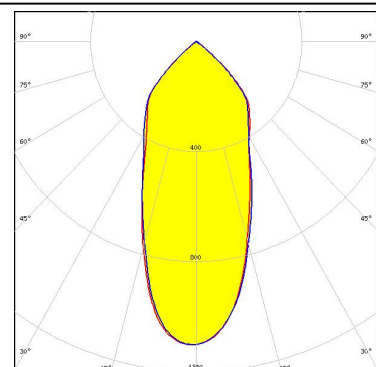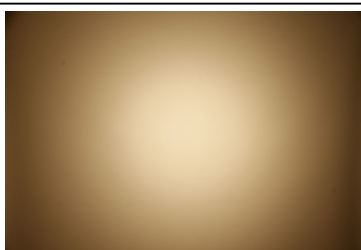



LED V18 Gen7
 FWHM 44.0°
 Efficiency 93 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2350

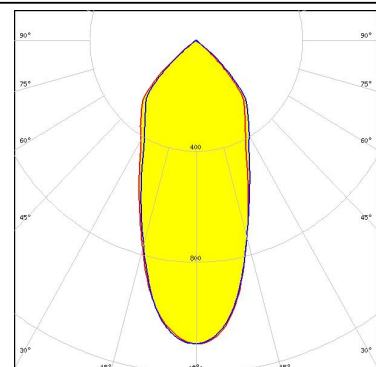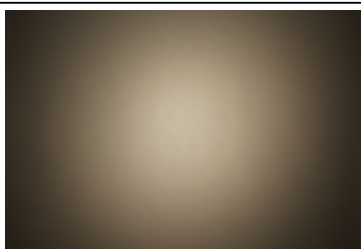



PHOTOMETRIC DATA (MEASURED):



LED V22 Gen6
FWHM 47.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8102/G2

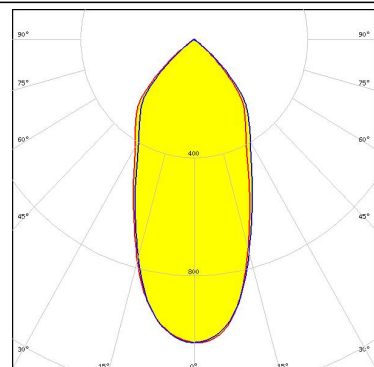
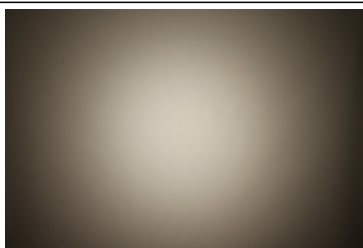


LED V22 Gen7
FWHM 47.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2030

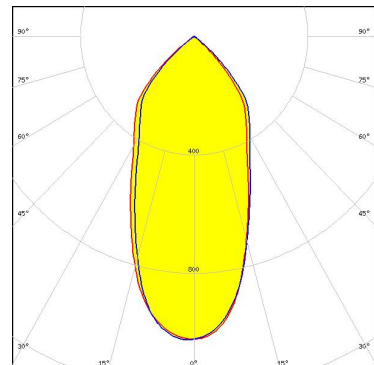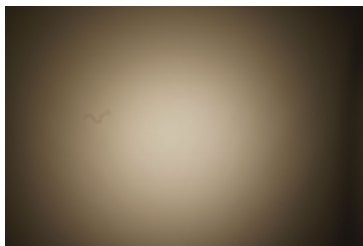



CITIZEN

LED CLL03x/CLU03x
FWHM 37.0°
Efficiency 92 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2021

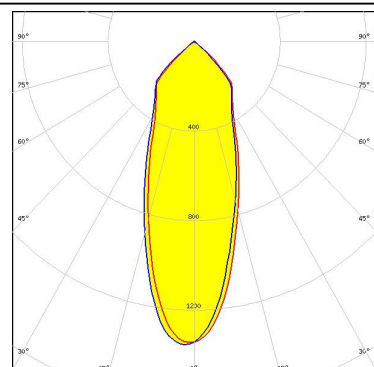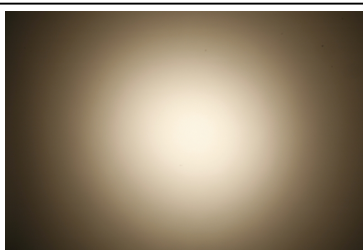

CITIZEN



LED CLL03x/CLU03x
FWHM 43.0°
Efficiency 89 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F13671_ANGE-RZ-LENS
A.A.G. STUCCHI: 8101/G2

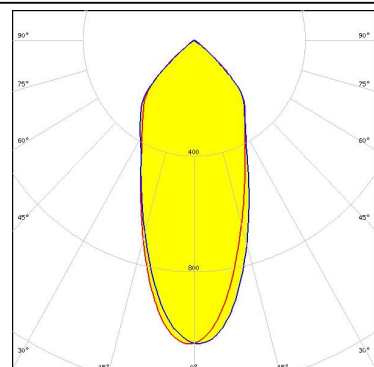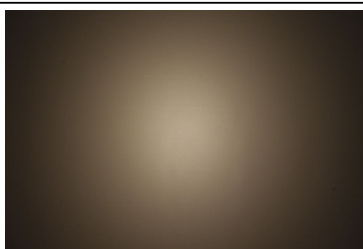

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLL03x/CLU03x
FWHM 39.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8101/G2

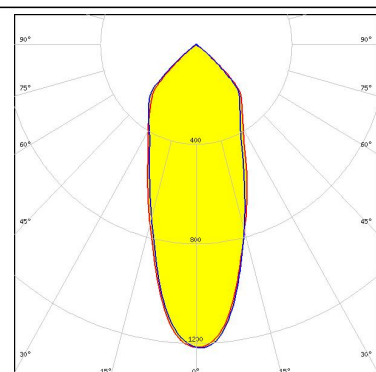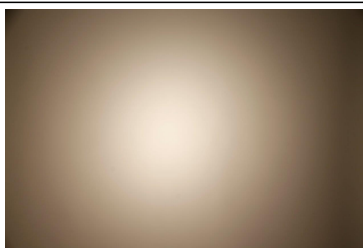



CITIZEN

LED CLL04x/CLU04x
FWHM 50.0°
Efficiency 87 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F13671_ANGE-RZ-LENS
A.A.G. STUCCHI: 8102/G2

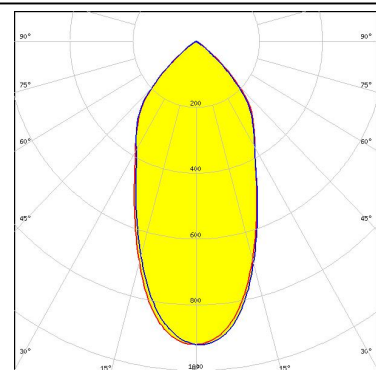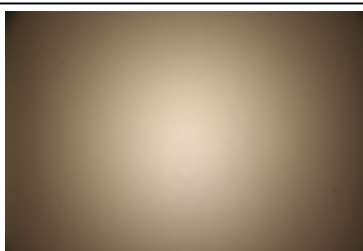



CITIZEN

LED CLL04x/CLU04x
FWHM 39.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8102/G2

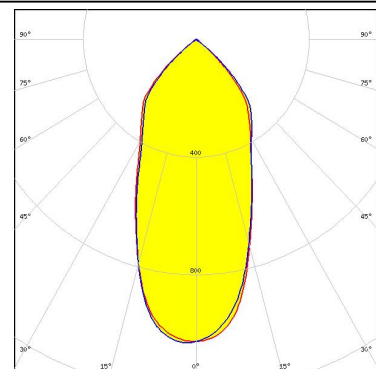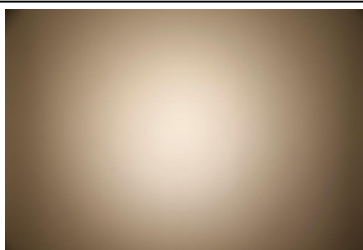

CITIZEN



LED CLU720/721
FWHM 35.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8101/G2

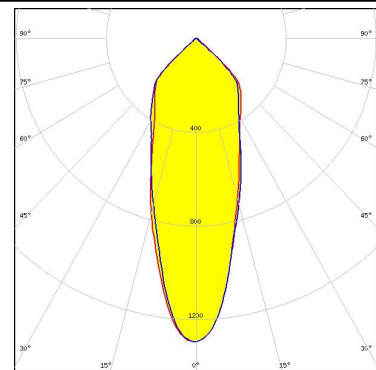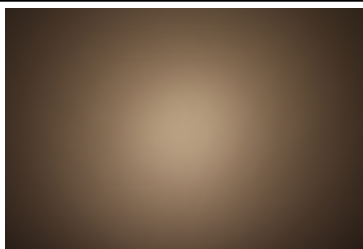

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU720/721
FWHM 34.0°
Efficiency 94 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2021

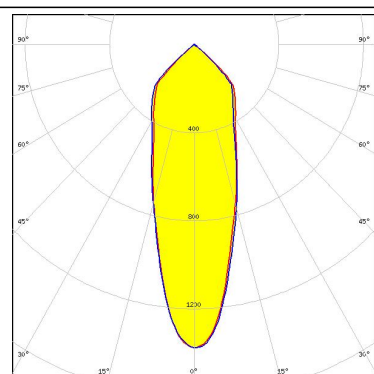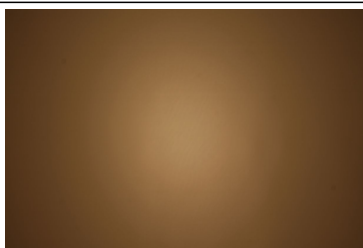



CREE

LED CXA/B 25xx
FWHM 42.0°
Efficiency 93 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8401/G2

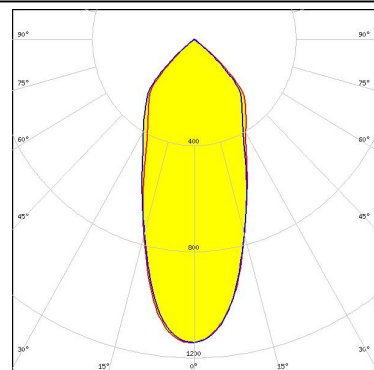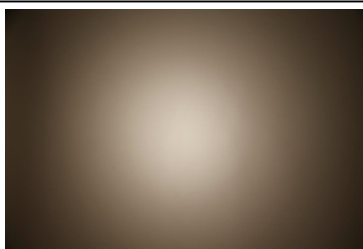



CREE

LED CXA/B 25xx
FWHM 44.0°
Efficiency 92 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2141

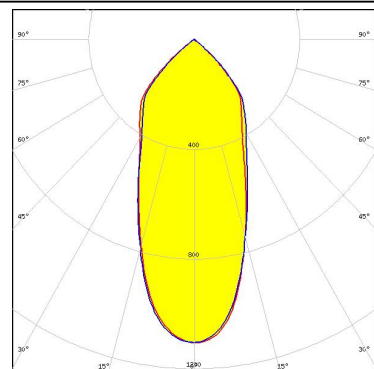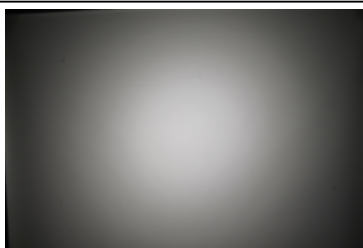

CREE



LED CXA/B 25xx
FWHM 46.0°
Efficiency 89 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F13671_ANGE-RZ-LENS
BJB: 47.319.2141

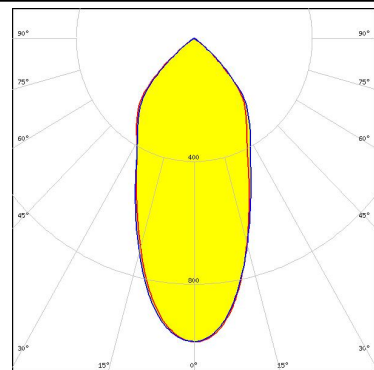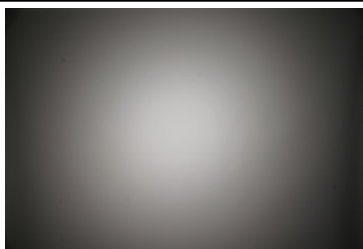



PHOTOMETRIC DATA (MEASURED):





LED CXA/B 30xx
FWHM 45.0°
Efficiency 92 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8404/G2

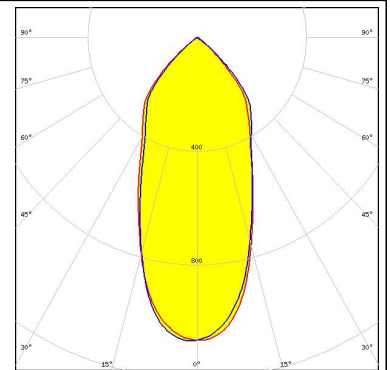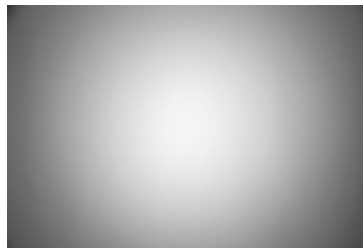



LED COB 10W/13W/17W/24W
FWHM 37.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8600/G2

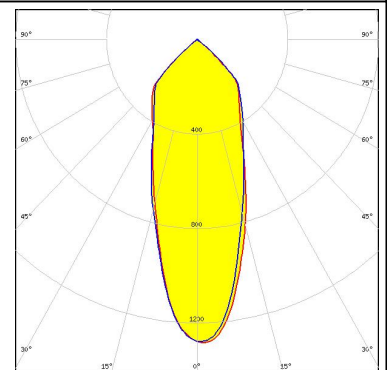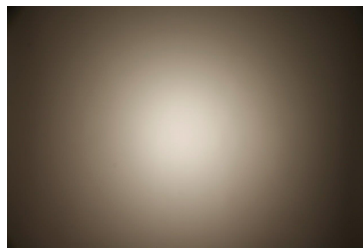

LED COB 10W/13W/17W/24W
FWHM 38.0°
Efficiency 93 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2080

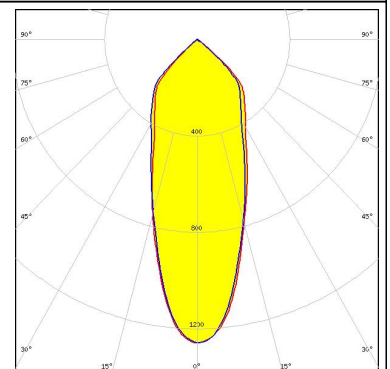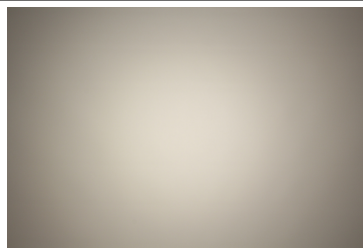



LED COB 40W/60W
FWHM 46.0°
Efficiency 91 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8102/G2

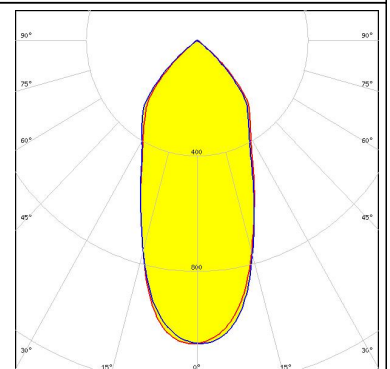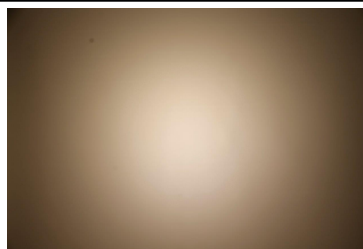



PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1204/1205
 FWHM 38.0°
 Efficiency 94 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8301/G2

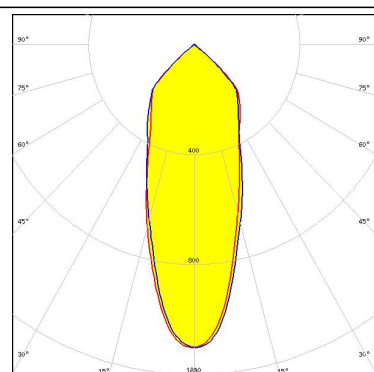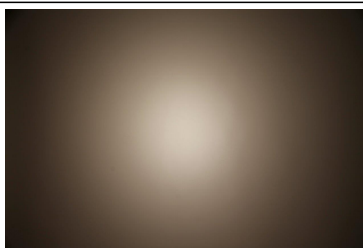



LED LUXEON CoB 1208
 FWHM 39.0°
 Efficiency 94 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8301/G2

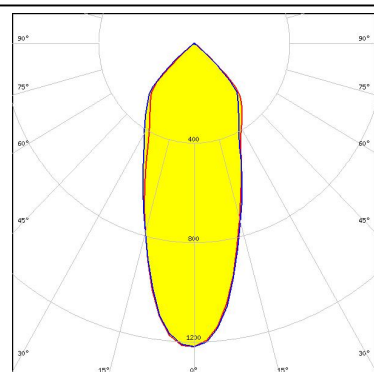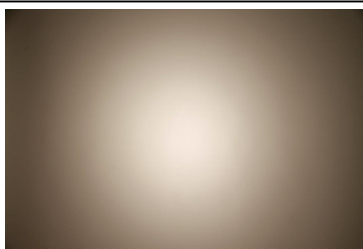

LED LUXEON CoB 1211
 FWHM 43.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8102/G2

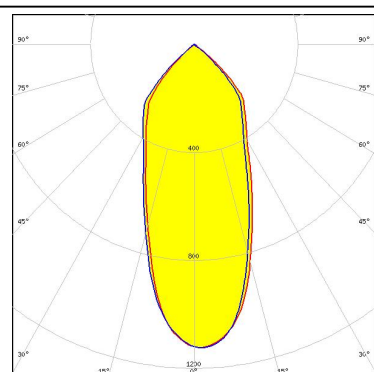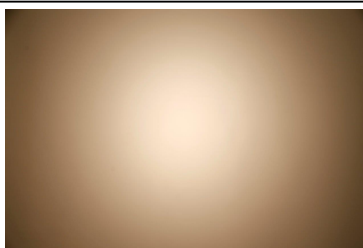



LED LUXEON CoB 1211
 FWHM 44.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

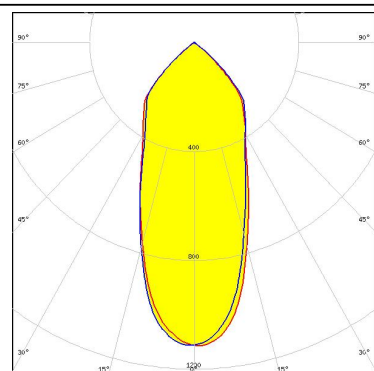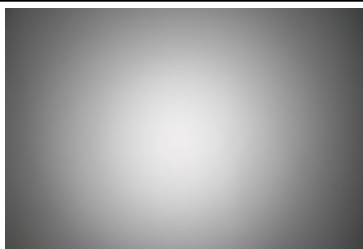



PHOTOMETRIC DATA (MEASURED):





LED LUXEON CoB 1216/1812
 FWHM 50.0°
 Efficiency 88 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2030

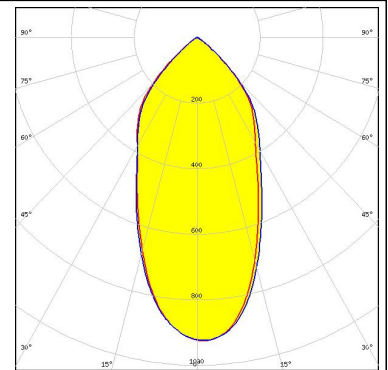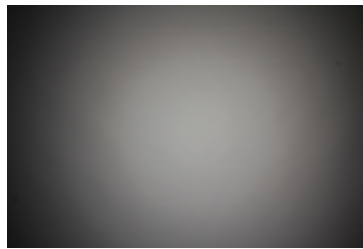



LED LUXEON CoB 1216/1812
 FWHM 49.0°
 Efficiency 91 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

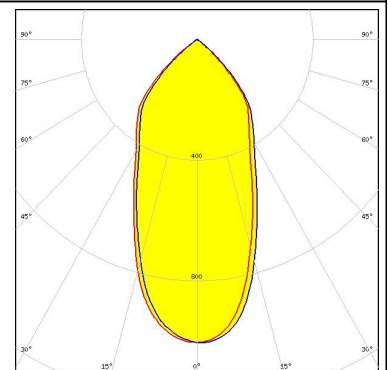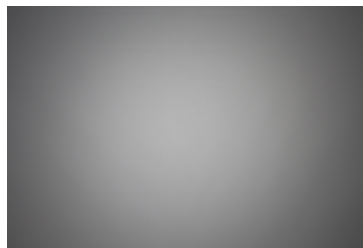

LED LUXEON K12
 FWHM 48.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2070

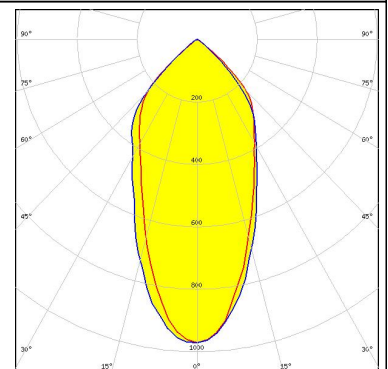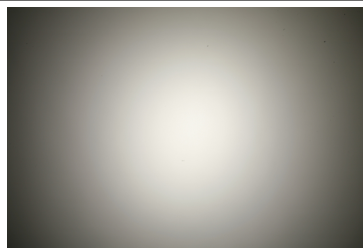



LED LUXEON K16
 FWHM 50.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2070

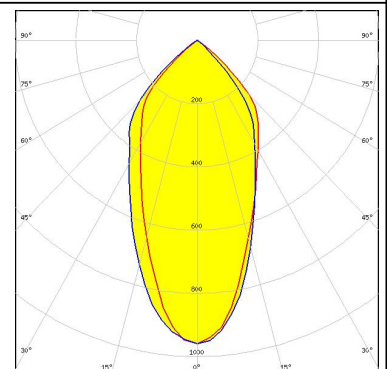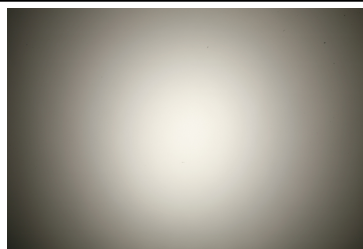



PHOTOMETRIC DATA (MEASURED):





LED LUXEON K16
FWHM 44.0°
Efficiency 94 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2070

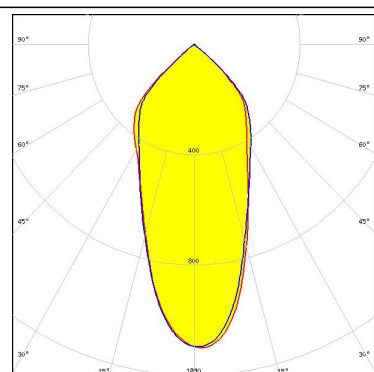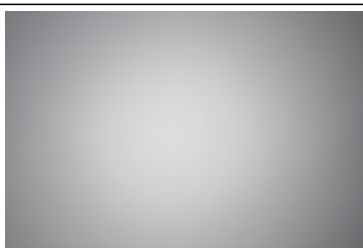



LED CxM-14 (19x19)
FWHM 40.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2021

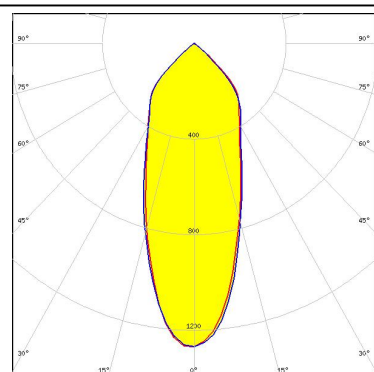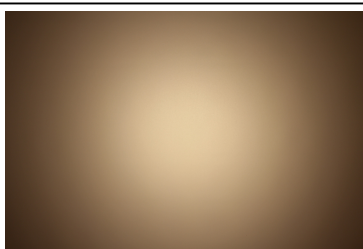

LED CxM-22 (28x28)
FWHM 48.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2030

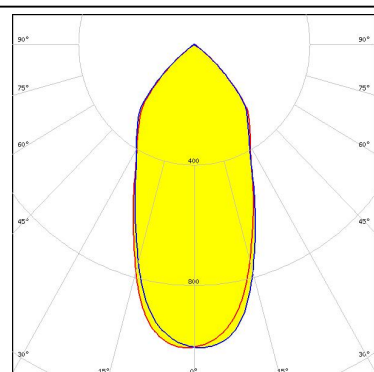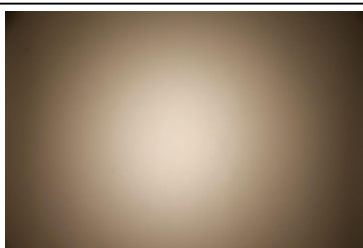



LED Soleriq S13
FWHM 37.0°
Efficiency 94 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8502/G2

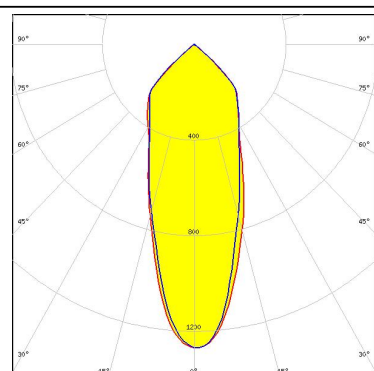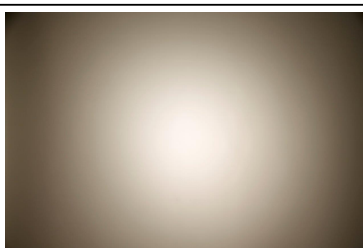

PHOTOMETRIC DATA (MEASURED):



OSRAM
Opto Semiconductors

LED Soleriq S13 19x19
FWHM 37.0°
Efficiency 93 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2021

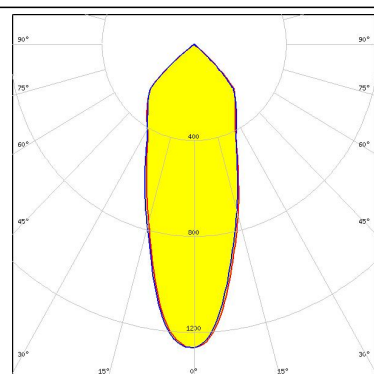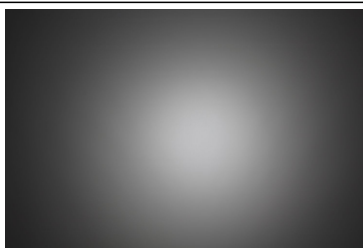



OSRAM
Opto Semiconductors

LED Soleriq S19
FWHM 41.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2170

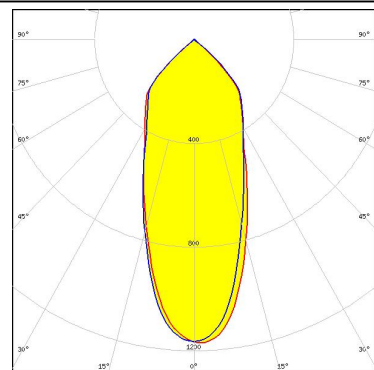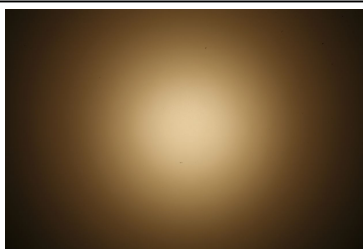



OSRAM
Opto Semiconductors

LED Soleriq S19
FWHM 41.0°
Efficiency 93 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
A.A.G. STUCCHI: 8503/G2

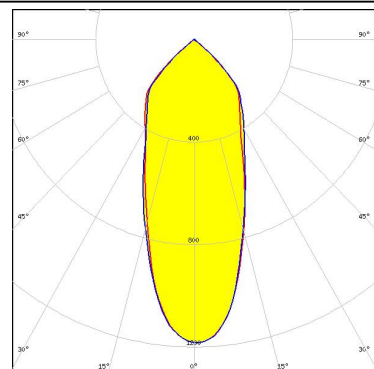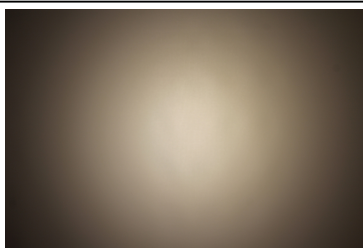

PHILIPS



LED Fortimo SLM L19 CoB
FWHM 42.0°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F13671_ANGE-RZ-LENS
BJB: 47.319.2030

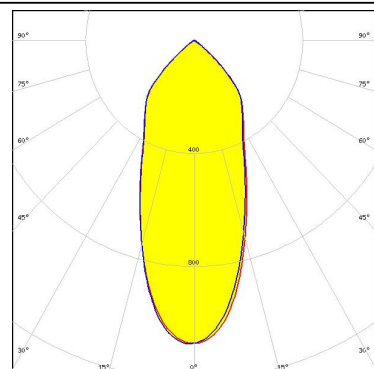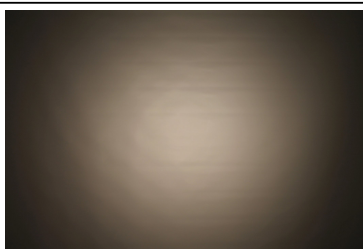

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM L19 CoB
 FWHM 40.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

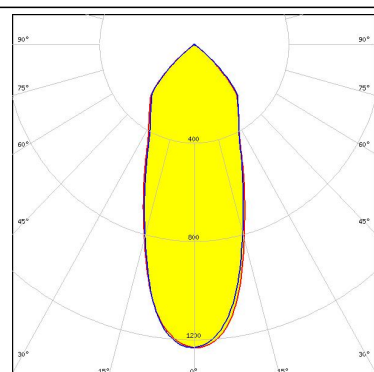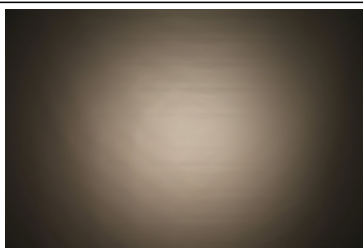



PHILIPS

LED Fortimo SLM L23 CoB
 FWHM 44.0°
 Efficiency 93 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

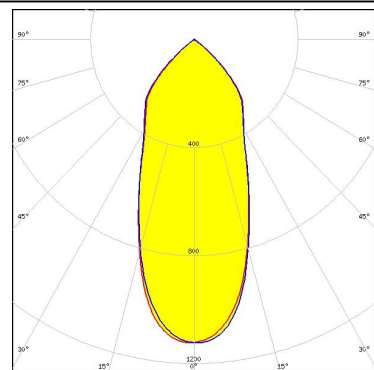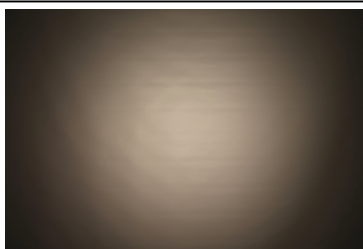



PHILIPS

LED Fortimo SLM L23 CoB
 FWHM 45.0°
 Efficiency 88 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2030

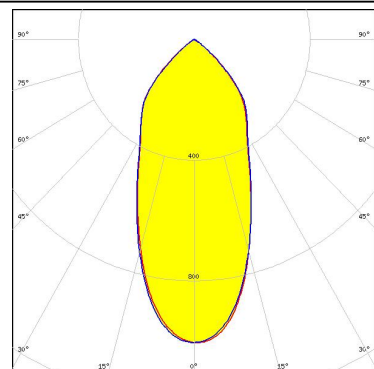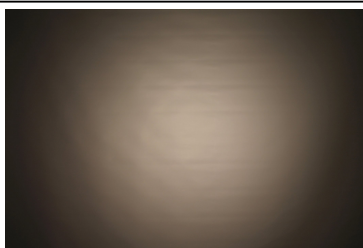

SAMSUNG



LED LC016D / LC019D / LC026D / LC033D
 FWHM 41.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8101/G2

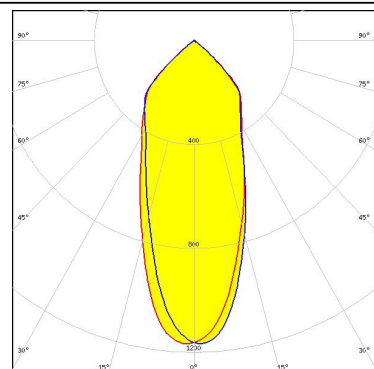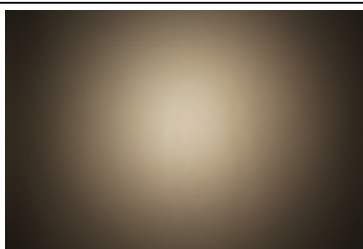

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 FWHM 45.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2021

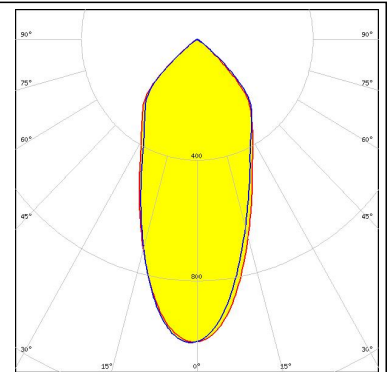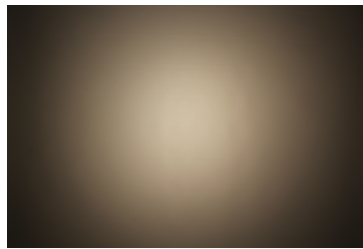



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 FWHM 45.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 A.A.G. STUCCHI: 8101/G2

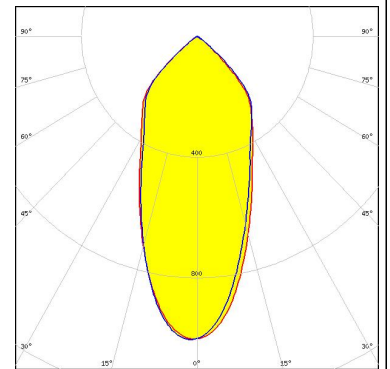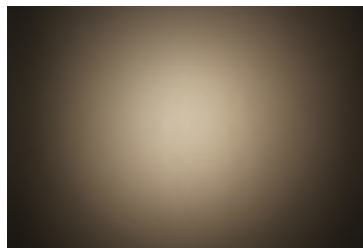



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 FWHM 41.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2021







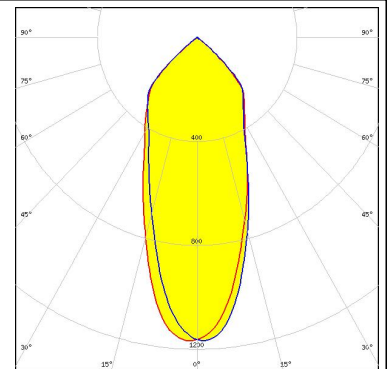
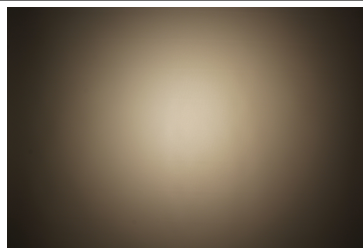


SEOUL SEMICONDUCTOR

LED ZC12/18
 FWHM 39.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8101/G2

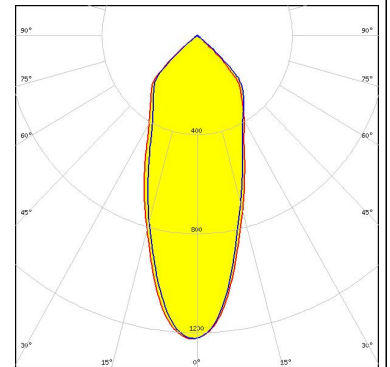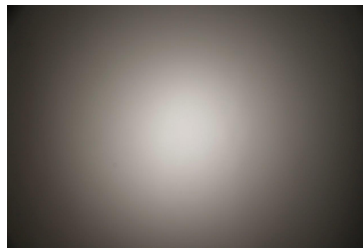



PHOTOMETRIC DATA (MEASURED):
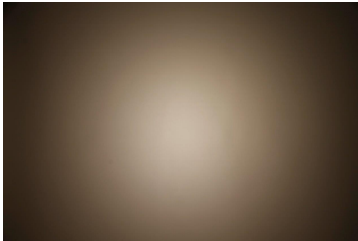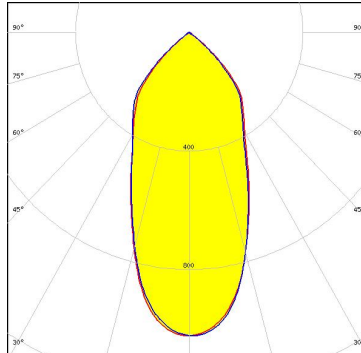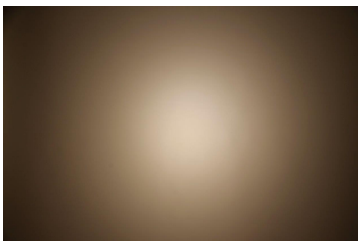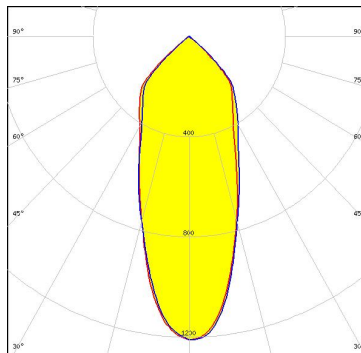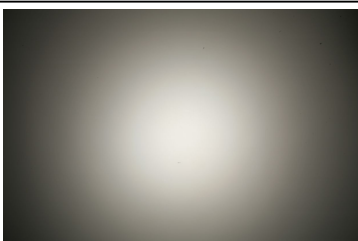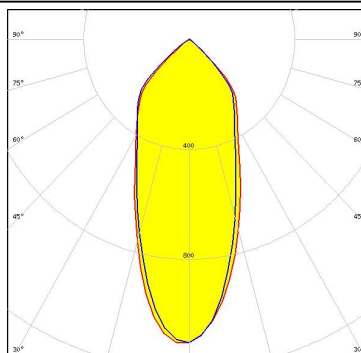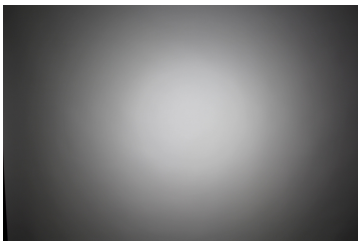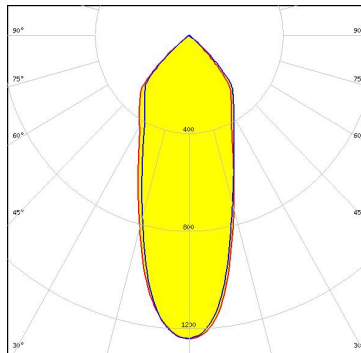
<p>SEOL SEOUL SEMICONDUCTOR</p> <p>LED ZC25/40/60 FWHM 47.0° Efficiency 92 % Peak intensity 1 cd/lm LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8102/G2</p>		
<p>SHARP</p> <p>LED Mega Zenigata (GW6DME) FWHM 40.0° Efficiency 94 % Peak intensity 1.2 cd/lm LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8301/G2</p>		
<p>SHARP</p> <p>LED Tiger Zenigata (GWTGCBG4FD) FWHM 41.0° Efficiency 90 % Peak intensity 1.1 cd/lm LEDs/each optic 1 Light colour White Required components: F13671_ANGE-RZ-LENS BJB: 47.319.2051</p>		
<p>TRIDONIC</p> <p>LED SLE G7 LES17 H FWHM 38.0° Efficiency 91 % Peak intensity 1.2 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED SLE G7 LES21 H
FWHM 43.0°
Efficiency 91 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

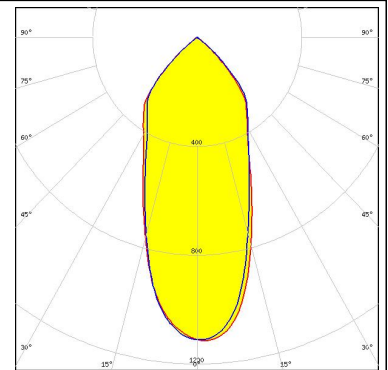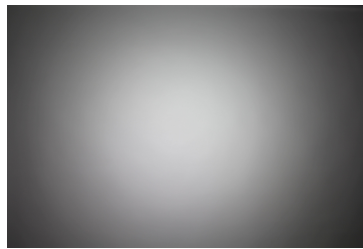



XICATO

LED XOB 14.5 mm
FWHM 40.0°
Efficiency 94 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2021

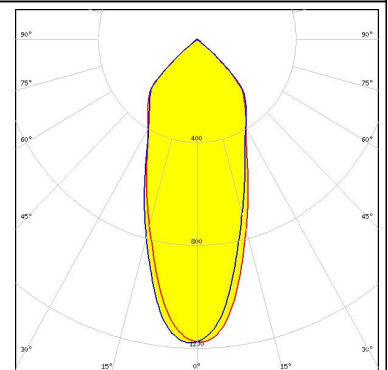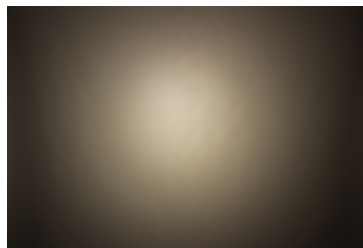

XICATO

LED XTM - 19mm LES
FWHM 43.0°
Efficiency 93 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C15743_XTM-ADAPTER-50-B

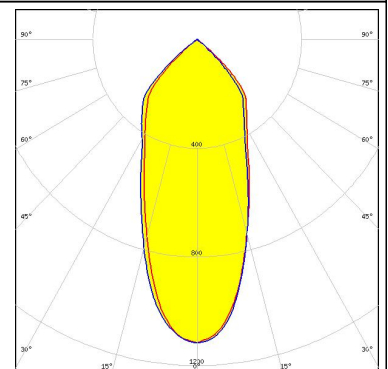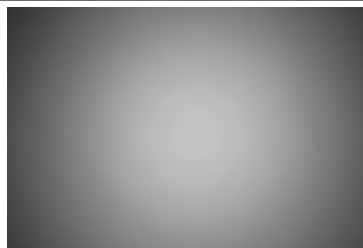


PHOTOMETRIC DATA (SIMULATED):

CITIZEN

LED CLL04x/CLU04x
FWHM 37.0°
Efficiency 95 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2030

CITIZEN

LED CLU730/731
FWHM 37.0°
Efficiency 91 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2030

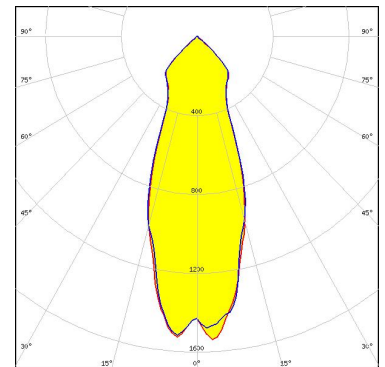


LUMILEDS

LED LUXEON K12
FWHM 29.0°
Efficiency %
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2070

SAMSUNG

LED LC040D / LC060D / LC080D
FWHM 41.0°
Efficiency 90 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:
BJB: 47.319.2030

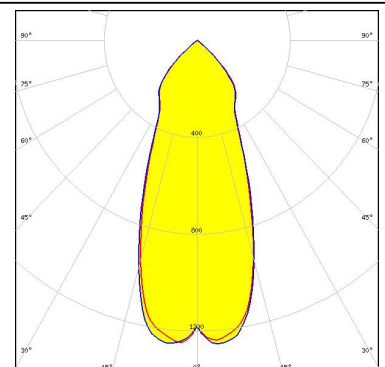

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)