

PRODUCT DATASHEET Leila series

last update 12/4/2013

| | Product number | FCN11456_LD1-M2 | | |
|----------------------------|---------------------|-----------------------|---------------------|------------------------|
| | Family | Leila | FWHM | (simulated) 28 |
| | Туре | Pack | Efficiency | - |
| | LED | Diamond Dragon | cd/lm | - |
| | Color | White | Gerber File | Available |
| | Diameter | 21.6 mm | | |
| Contribution of the second | Height | 15.4 mm | | |
| | Style | Round | | |
| | Optic Material | PMMA | | |
| | Holder Material | PC | | |
| | Fastening | Таре | | |
| | Status | On production | | |
| | Product number | FCN10796_LD1-RS | | |
| | E a sa ita | 1 | | 0. 4 |
| | Family | Leila Pack | FWHM | 8 degrees |
| | Type LED | Diamond Dragon | Efficiency cd/lm | - (simulated) 0.000 |
| | Color | White | Gerber File | Available |
| | Diameter | 21.6 mm | Gerber File | Available |
| | Height | 15.4 mm | | |
| E.S. | Style | Round | | |
| | Optic Material | PMMA | | |
| | Holder Material | PC | | |
| | Fastening | Glue | | |
| | Status | On production | | |
| | Product number | FCN10798_LD1-D | | |
| | | | | |
| | Family | Leila | FWHM | 14 degrees |
| | Туре | Pack | Efficiency | - |
| And the Ball | LED | Diamond Dragon | cd/lm | - |
| | Color | White | Gerber File | Available |
| | Diameter | 21.6 mm | | |
| | Height | 15.4 mm | | |
| | Style | Round | | |
| | Optic Material | PMMA | | |
| | Holder Material | PC | | |
| | Fastening Status | Glue On production | | |
| | Status | On production | | |
| | Product number | FCN10795_LD1-M | | |
| | Family | Leila | FWHM | 24 degrees |
| | Туре | Pack | Efficiency | - |
| | LED | Diamond Dragon | cd/lm | - |
| A CONTRACTOR OF | Color | White | Gerber File | Available |
| | Diameter | 21.6 mm | | |
| | Height | 15.4 mm | | |
| | Style | Round | | |
| | Optic Material | PMMA | | |
| | Holder Material | PC | | |
| | Fastening | Glue | | |
| | Status | On production | | |
| | | | | |
| | | | | |

January 7th 2016 4:14 Copyright Ledil Oy - Subject to change without prior notice - Page 1/3

Ledil Oy Salorankatu 10 24240 SALO Finland



PRODUCT DATASHEET Leila series

last update 12/4/2013

| | Product number | FCN10797_LD1-REC | | |
|--|-----------------|-------------------|-------------|---------------|
| and the second | Family | Leila | FWHM | 40+24 degrees |
| | Туре | Pack | Efficiency | - |
| 1112 | LED | Diamond Dragon | cd/lm | - |
| alle the | Color | White | Gerber File | Available |
| | Diameter | 21.6 mm | | |
| 1111-18-20-20 | Height | 15.4 mm | | |
| | Style | Round | | |
| | Optic Material | PMMA | | |
| | Holder Material | PC | | |
| | Fastening | Glue | | |
| | Status | On production | | |
| | Product number | FCN11107_LD1-O-90 | | |
| | Family | Leila | FWHM | 40+14 degrees |
| anni lilling a | Туре | Pack | Efficiency | - |
| | LED | Diamond Dragon | cd/lm | - |
| | Color | White | Gerber File | Available |
| | Diameter | 21.6 mm | | |
| | Height | 15.4 mm | | |
| | Style | Round | | |
| | Optic Material | PMMA | | |
| | Holder Material | PC | | |
| | Fastening | Glue | | |
| | Status | On production | | |
| and the second s | | | | |

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.

Ledil Oy Salorankatu 10 24240 SALO Finland



PRODUCT DATASHEET Leila series last update 12/4/2013

GENERAL INFORMATION

- Product series especially designed & optimized for Diamond Dragon series of LEDs.

- Special care taken to make light distribution as uniform as possible.

- Lens material optical grade PMMA with high UV and temperature resistance. Allows use of high current and temperature conditions.

Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%208N%20UL94_Yellow%20Card.pdf http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%208N%20PLEXIGLAS-Datasheet.pdf - Optic holder molded by high quality PC material (120 dergees of Celcius / 248 degrees of Fahrenheit).


- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.

http://www.ledil.com/datasheets/DataSheet_GLUES.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit boar weaken the strength of the glue.

NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.

Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

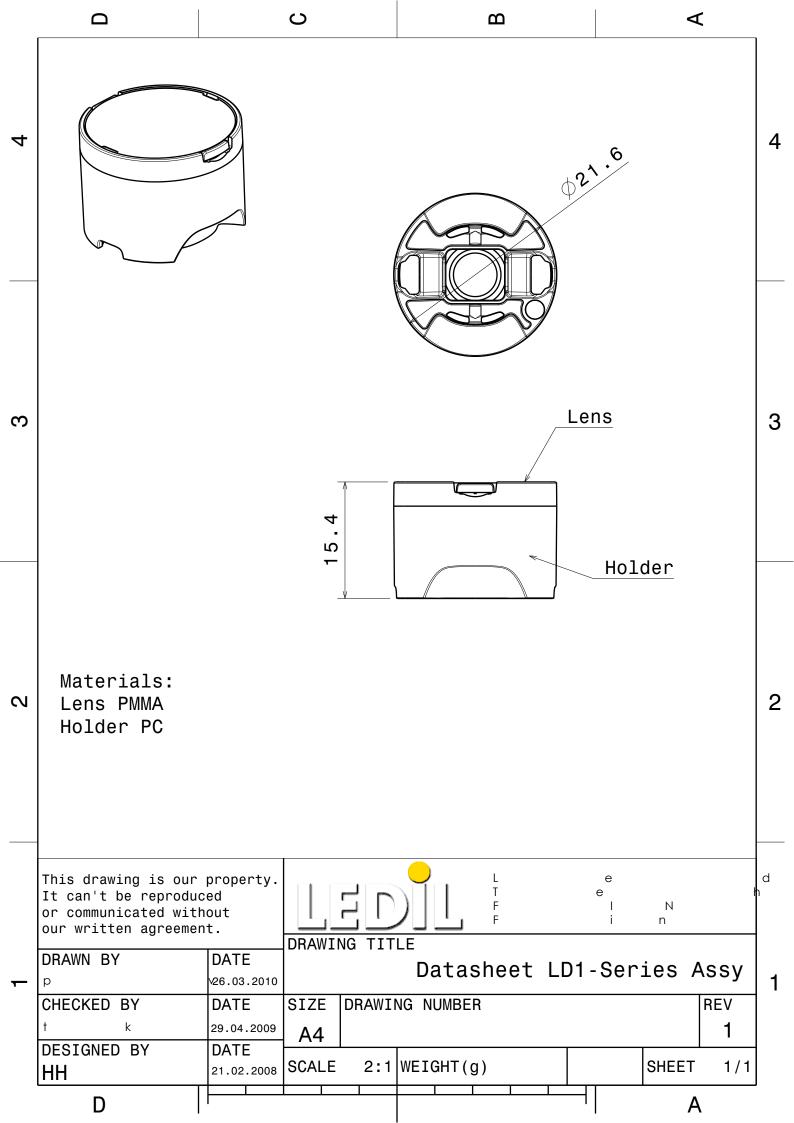

Luminaire: Ledil Oy FA10796_LD1-RS FA10796_LD1-RS Lamps: 1 x Osram Diamond Dragon

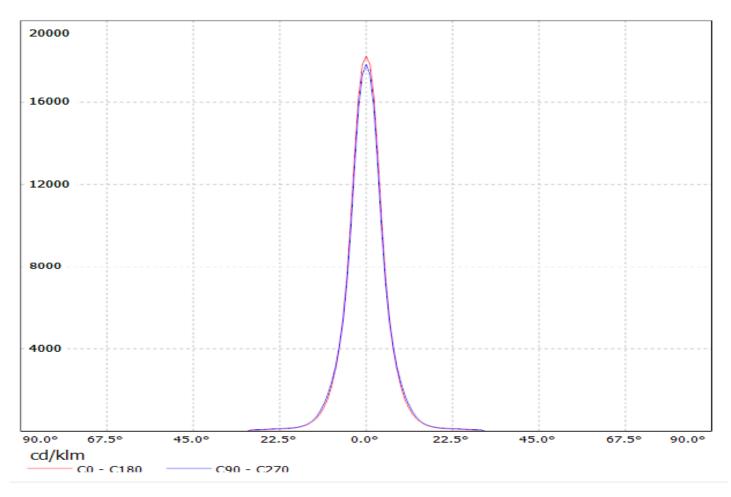

Luminaire: Ledil Oy FA10796_LD1-RS FA10796_LD1-RS Lamps: 1 x Osram Diamond Dragon

