


last update 12/6/2013







Family Leila Type LUXEON Rebel LED Color White Diameter 21.6 mm Height 14.3 mm Style Round Optic Material **PMMA** PC Holder Material Glue Fastening Ready Status

FWHM 8 degrees
Efficiency 96 %
cd/lm Gerber File Available

### Ordering number FCN11738\_LR1-RS2

Family Leila Type **LUXEON Rebel LED** Color White Diameter 21.6 mm Height 14.3 mm Style Round **PMMA** Optic Material PC Holder Material Fastening Glue Status Ready

FWHM 10 degrees
Efficiency 93 %
cd/lm 16.000
Gerber File Available

### Ordering number FCN10806\_LR1-D

Family Leila Type **LUXEON Rebel LED** Color White Diameter 21.6 mm Height 14.3 mm Style Round **PMMA** Optic Material Holder Material PC Fastening Glue Status Ready

FWHM 11 degrees Efficiency 96 % cd/lm -

Gerber File Available

#### Ordering number FCN10803\_LR1-M

Family Leila Type LED **LUXEON Rebel** Color White 21.6 mm Diameter 14.3 mm Height Round Style Optic Material **PMMA** Holder Material PC Fastening Glue Status Ready

FWHM 22 degrees
Efficiency 91 %
cd/lm -

Gerber File Available

September 30th 2013 18:43 Copyright Ledil Oy - Subject to change without prior notice - Page 1/4



last update 12/6/2013



30 degrees 90 %

Available

Available



#### Ordering number FCN11458\_LR1-M2

**FWHM** Family Leila Type Efficiency LUXEON Rebel LED cd/lm Color White Gerber File Diameter 21.6 mm Height 14.3 mm Style Round **PMMA** Optic Material

Ordering number FCN10805\_LR1-REC

PC

Glue Ready

Holder Material Fastening

Status

Family Leila FWHM 36+20 degrees
Type - Efficiency 92 %
LED LUXEON Rebel cd/lm -

Gerber File

Color White Diameter 21.6 mm Height 14.3 mm Style Round **PMMA** Optic Material PC Holder Material Fastening Glue Status Ready

Ordering number FCN11106\_LR1-O-90

Family Leila FWHM 38+15.5 degrees

Type - Efficiency 96 %
LED LUXEON Rebel cd/lm Color White Gerber File Available

Diameter 21.6 mm
Height 14.3 mm
Style Round
Optic Material PMMA
Holder Material PC
Fastening Glue
Status Ready

Ordering number FCN10890\_LR1-W

14.3 mm

Family Leila FWHM 48 degrees
Type - Efficiency 94 %
LED LUXEON Rebel cd/lm -

Color White Gerber File Available
Diameter 21.6 mm

Style Round
Optic Material PMMA
Holder Material PC
Fastening Glue
Status Ready

Height

September 30th 2013 18:43 Copyright Ledil Oy - Subject to change without prior notice - Page 2/4





last update 12/6/2013

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



last update 12/6/2013

PHILIPS LUMILEDS

#### GENERAL INFORMATION

- Product series especially designed & optimized for LUXEON Rebel series of LEDs.
- Special care taken to make light distribution as uniform as possible.
- Lens material optical grade PMMA with high UV and temperature resistance (105 degrees of Celcius / 220 degrees of Fahrenheit). Allows use of high current and temperature conditions.

Please find more information about used material from below:

http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%208N%20UL94\_Yellow%20Card.pdf http://ledil.fi/sites/default/files/Documents/Technical/Material/PMMA%208N%20PLEXIGLAS-Datasheet.pdf


- Optic holder molded by high quality PC material (120 dergees of Celcius / 248 degrees of Fahrenheit).
- Fastening to PCB with appropriate adhesive. By clicking link below you can find Ledil recommended glue options.

http://www.ledil.com/datasheets/DataSheet GLUES.pdf


NOTE 1: We advise customer to ensure the suitability and sufficiency of the bond in the end product. For example, mechanical stress, vibration and holes on the surface of the circuit boar weaken the strength of the glue.

NOTE 2: All surfaces where glue is applied must be clean, dry and free from grease and dirt. If cleaning of PCB surfaces is needed, please follow strictly the cleaning instructions of your LED manufacturer -this is important as cleaning shall under no circumstances damage LEDs or other electronics components on the PCB.


Further note that optical components shall not be cleaned with any chemicals - only micro fiber cloth may be used to remove fingerprints or other traces from handling.

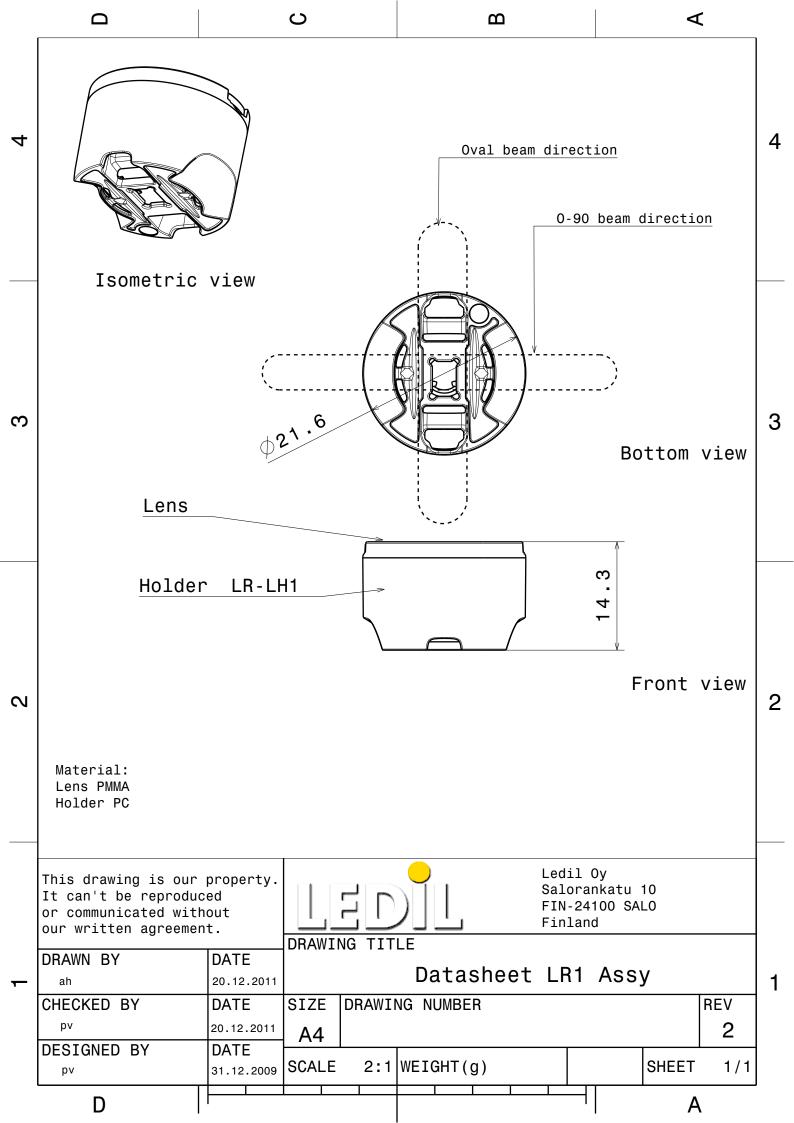


Luminaire: Ledil Oy FA10804\_LR1-RS FA10804\_LR1-RS Lamps: 1 x LUXEON REBEL

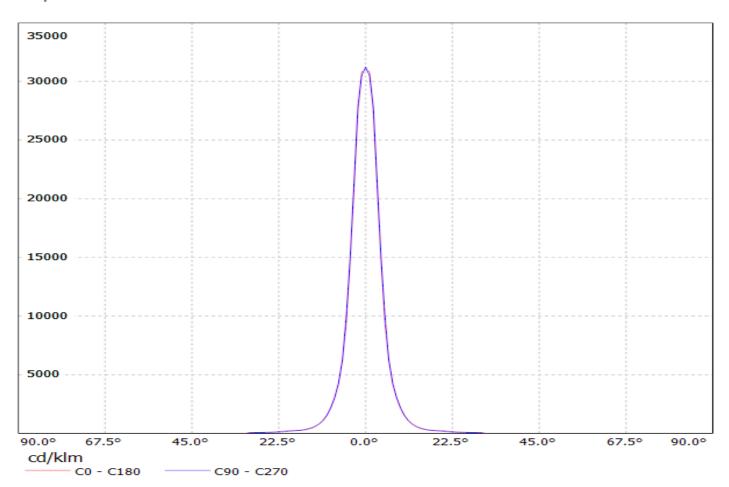


Luminaire: Ledil OY FCN11738\_LR1-RS2-RE LOR=93% Lamps: 1 x Luxeon Rebel 250mA 78lm

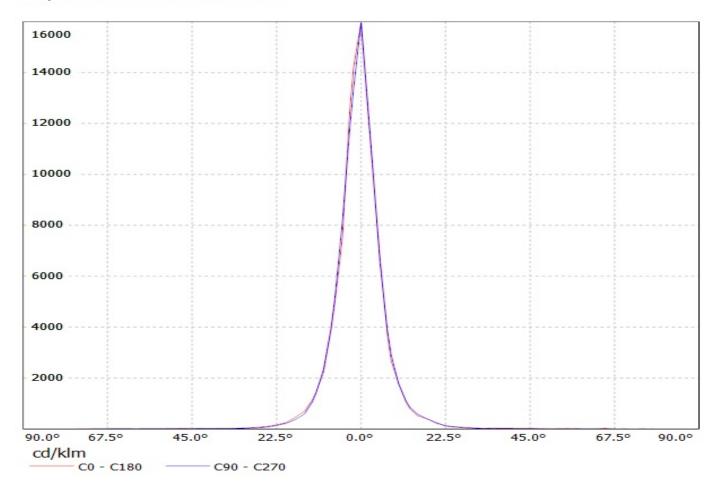


Luminaire: Ledil Oy FA10803\_LR1-M FA10803\_LR1-M Lamps: 1 x Luxeon Rebel

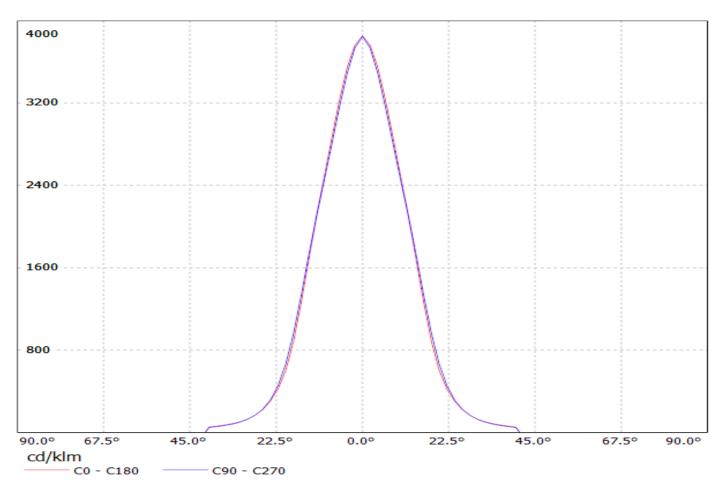


Luminaire: Ledil Oy FA10805\_LR1-REC FA10805\_LR1-REC Lamps: 1 x Luxeon Rebel (white)

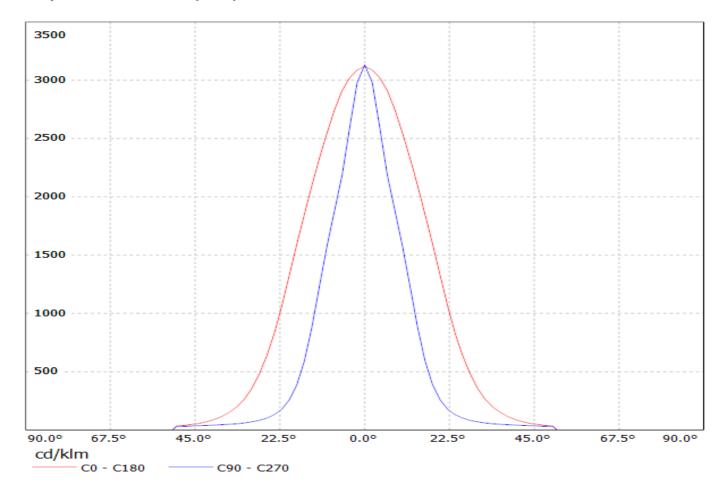

Luminaire: Ledil Oy FA10890\_LR1-W FA10890\_LR1-W Lamps: 1 x Luxeon Rebel (white)

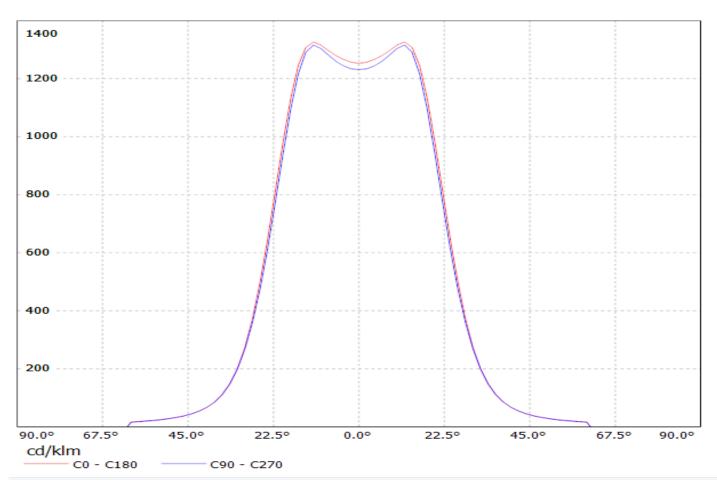


Luminaire: Ledil Oy FA10804\_LR1-RS FA10804\_LR1-RS Lamps: 1 x LUXEON REBEL

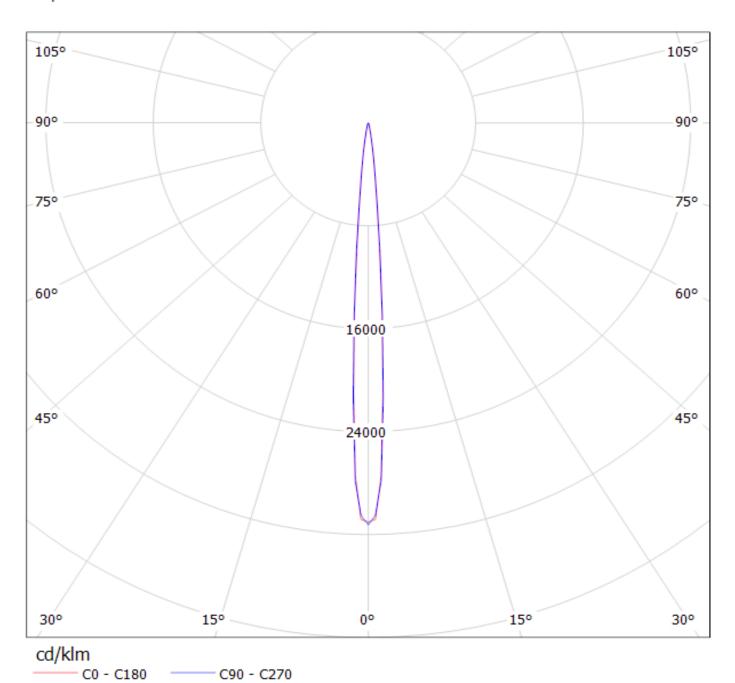


Luminaire: Ledil OY FCN11738\_LR1-RS2-RE LOR=93%


Lamps: 1 x Luxeon Rebel 250mA 78lm

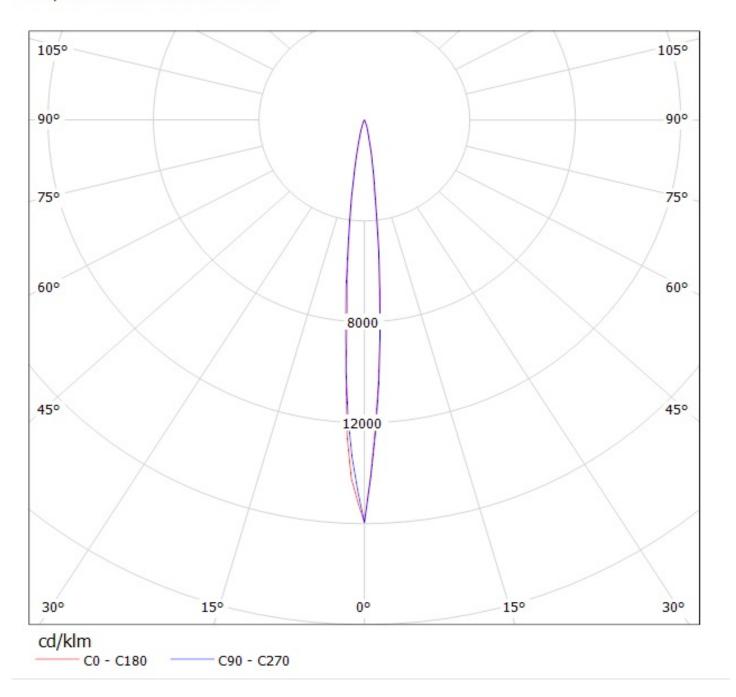

Luminaire: Ledil Oy FA10803\_LR1-M FA10803\_LR1-M Lamps: 1 x Luxeon Rebel

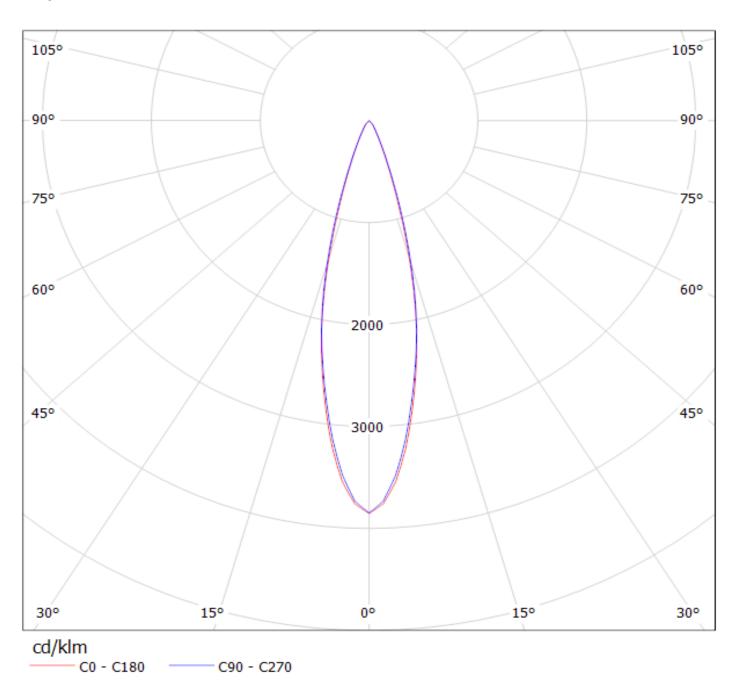

Luminaire: Ledil Oy FA10805\_LR1-REC FA10805\_LR1-REC Lamps: 1 x Luxeon Rebel (white)

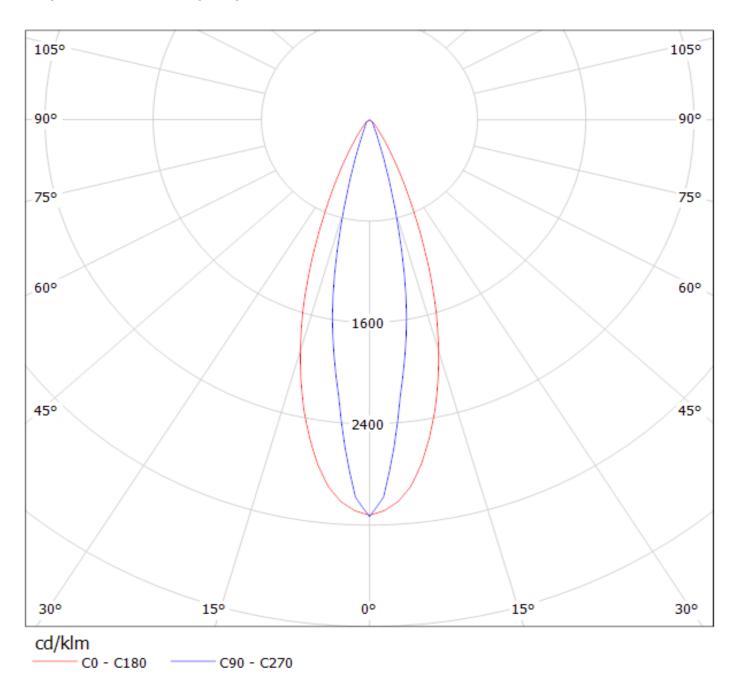

Luminaire: Ledil Oy FA10890\_LR1-W FA10890\_LR1-W Lamps: 1 x Luxeon Rebel (white)

