

## SUMMARY

### # Wires



*Image is for illustrative purpose only*

Series	0V
Termination type	No contacts / Accessory
IP rating	68
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	active

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	BRE*: Cap for receptacle
Keying	No keying
Housing Material	Brass (nickel plated) shell, collet nut, latch sleeve and mid pieces
Weight	12.58 g

### Performance

Configuration
Insulator
Rated Current

### Others


Endurance (Shell): 1000 mating cycles  
Temp (min / max): -20°C / +135°C  
Climatical Category: 20/200/21  
Shielding (min): 95 dB (10 MHz)  
Shielding (min): 80 dB (1 GHz)

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Salt Spray Corrosion: >144 hr  
Pressure: 30 bars

# DRAWINGS

## Draws

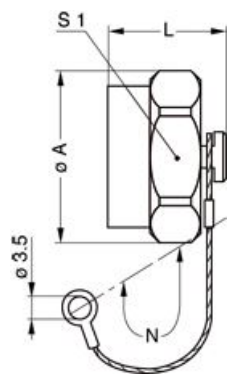

No keying

## Dimensions

	A	L	N	S1
mm.	17.2	13.7	85	16
in.	0.68	0.54	3.35	0.63

# RECOMMENDED BY LEMO

## Tools

## Cables

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.