
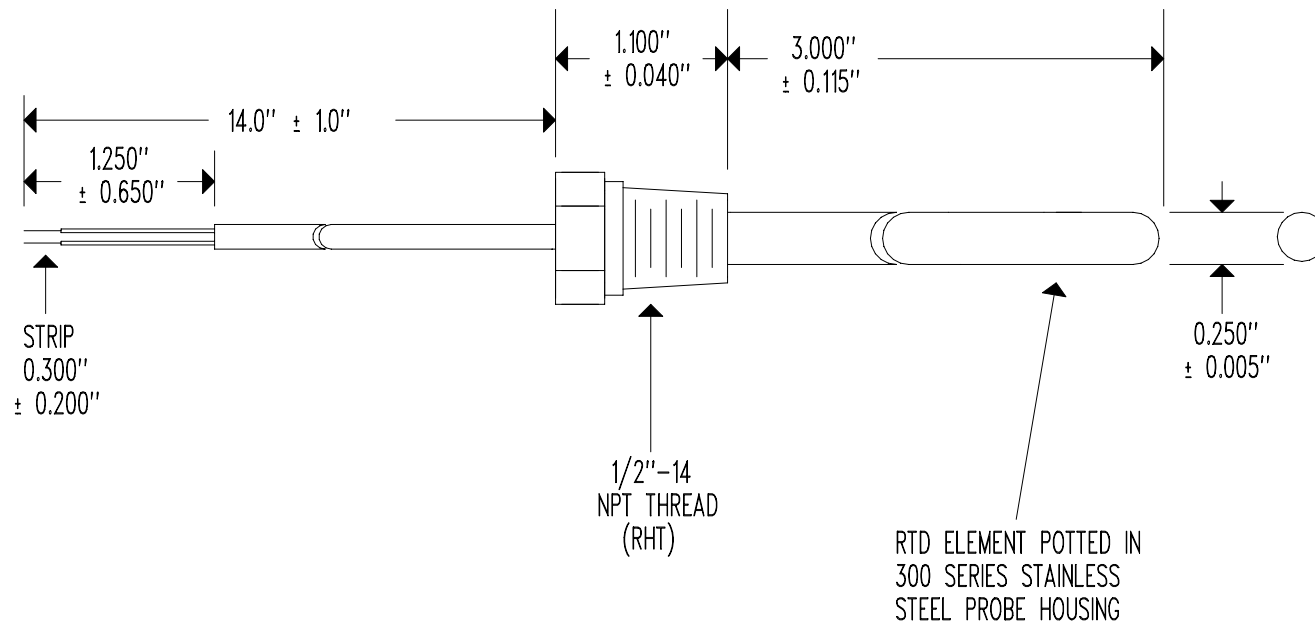




RTD ELEMENT RESISTANCE @ 0°C (+32°F) = 1,000 Ω ± 0.06%  
 RTD ELEMENT ACCURACY @ 0°C (+32°F) = ± 0.15°C  
 TCR = 3,850ppm/°C  
 RTD ELEMENT DIN 43760 ACCURACY CLASS = "A"  
 MAXIMUM TEMPERATURE RATING = +287.8°C (+550°F)

CABLE: 26 AWG, STRANDED CONDUCTOR, TWO CONDUCTOR,  
 GRASS BRAID INSULATED, GLASS BRAID JACKETED,  
 0.045" X 0.075" NOMINAL O.D.

SEE MANUFACTURING SPECIFICATION (LAYER 1)

|      |                                                   |          |     |
|------|---------------------------------------------------|----------|-----|
|      |                                                   |          |     |
| "A"  | CABLE WAS 10" ± 1" LONG & FIXED WIRE GAUGE (TYPO) | 07/07/16 | DD  |
| NONE | RELEASE TO PRODUCTION                             | 07/06/16 | DD  |
| REV  | REVISION RECORD                                   | DATE     | APP |

|          |             |                               |  |
|----------|-------------|-------------------------------|--|
| SCALE    | NONE        | U.S. SENSOR CORP.             |  |
| DRAWN BY | DAN DANKERT |                               |  |
| DATE     | 07/06/16    | 714-639-1000 www.ussensor.com |  |
| REV.     | "A"         | RTD PROBE ASSY                |  |
| LAYER    | 0 OF 2      | P/N USW4260                   |  |