


**Mallory Sonalert Products, Inc.**Part #: **SBS12LMMVPC****Sales Outline Drawing**Revision: **F**

Specifications:	cUL Recognized to IEC60601-1-8 Ventilation Melody			
	Sound Level Category:	Silence	Extra Loud	Extra Loud
Mode of Operation:		Silence - NO SOUND	Low Priority Alarm - 2 beeps repeating every 30 sec	Medium Priority Alarm - 3 beeps repeating every 7.5 sec High Priority Alarm - 10 beeps repeating every 2.5 sec
Loudness @ 10cm:		Silence	95 to 105 dB(A) Typ.	95 to 105 dB(A)
Frequency:		Silence	150 to 4000 Hz	150 to 4000 Hz
Connection:		Connect "+" to "+" & "-" to "-" of Power Supply	Connect "+" to "+" & "-" & L to "-" of Power Supply	Connect "+" to "+" & "-" & M to "-" of Power Supply
Voltage Rating:		9 to 12 VDC		
Average Current Draw:		<40mA Typ.	<70mA Typ.	<100mA Typ.
Ipk Current*:		630mA		
Housing Material:		ABS 777D Plastic Resin, Black		
Storage Temperature:		-40° to +85° C		
Operating Temperature:		-30° to +65° C		
Weight Typical:		1.1 oz (32g)		
Options:		Please contact factory.		

**Dimensions:** Inches [mm]**cUL Recognized****ROHS Compliant**

PATENT NUMBER: 7880593

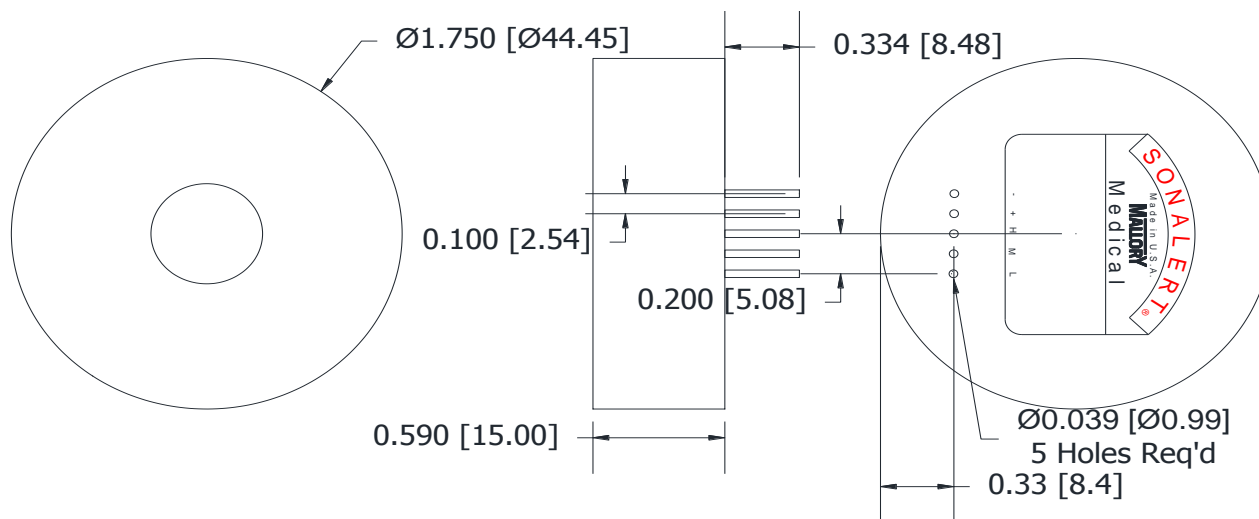

\*Ipk = Instantaneous Peak

tolerances:  $\pm 0.01$  [ $\pm 0.3$ ]  
 $\pm 0.005$  [ $\pm 0.1$ ]