



Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

General Description

The MAX9317/MAX9317A/MAX9317B/MAX9317C low-skew, dual 1-to-5 differential drivers are designed for clock and data distribution. The differential input is reproduced at five LVDS outputs with a low output-to-output skew of 5ps.

The MAX9317/MAX9317A are designed for low-voltage operation from a 2.375V to 2.625V power supply for use in 2.5V systems. The MAX9317B/MAX9317C operate from a 3.0V to 3.6V power supply for use in 3.3V systems. The MAX9317A/MAX9317C feature 50Ω input termination resistors to reduce component count.

The MAX9317 family is available in 32-pin 7mm × 7mm TQFP and space-saving 5mm × 5mm QFN packages and operate across the extended temperature range of -40°C to +85°C. The MAX9317A is pin compatible with ON Semiconductor's MC100EP210S.

Applications

Precision Clock Distribution
Low-Jitter Data Repeaters
Data and Clock Drivers and Buffers
Central-Office Backplane Clock Distribution
DSLAM Backplanes
Base Stations
ATE

Pin Configurations appear at end of data sheet.

Features


- ◆ Guaranteed 1.0GHz Operating Frequency
- ◆ 145ps (max) Part-to-Part Skew
- ◆ 5ps Output-to-Output Skew
- ◆ 330ps Propagation Delay from CLK_{_} to Q_{_}
- ◆ 2.375V to 2.625V Operation (MAX9317/MAX9317A)
- ◆ 3.0V to 3.6V Operation (MAX9317B/MAX9317C)
- ◆ ESD Protection: ±2kV (Human Body Model)
- ◆ Internal 50Ω Input Termination Resistors (MAX9317A/MAX9317C)

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE | NOMINAL SUPPLY VOLTAGE (V) |
|--------------|----------------|-------------|----------------------------|
| MAX9317ETJ* | -40°C to +85°C | 32 Thin QFN | 2.5 |
| MAX9317ECJ | -40°C to +85°C | 32 TQFP | 2.5 |
| MAX9317AETJ* | -40°C to +85°C | 32 Thin QFN | 2.5 |
| MAX9317AECJ | -40°C to +85°C | 32 TQFP | 2.5 |
| MAX9317BETJ* | -40°C to +85°C | 32 Thin QFN | 3.3 |
| MAX9317BECJ | -40°C to +85°C | 32 TQFP | 3.3 |
| MAX9317CETJ* | -40°C to +85°C | 32 Thin QFN | 3.3 |
| MAX9317CECJ | -40°C to +85°C | 32 TQFP | 3.3 |

*Future product—contact factory for availability.

Functional Diagram

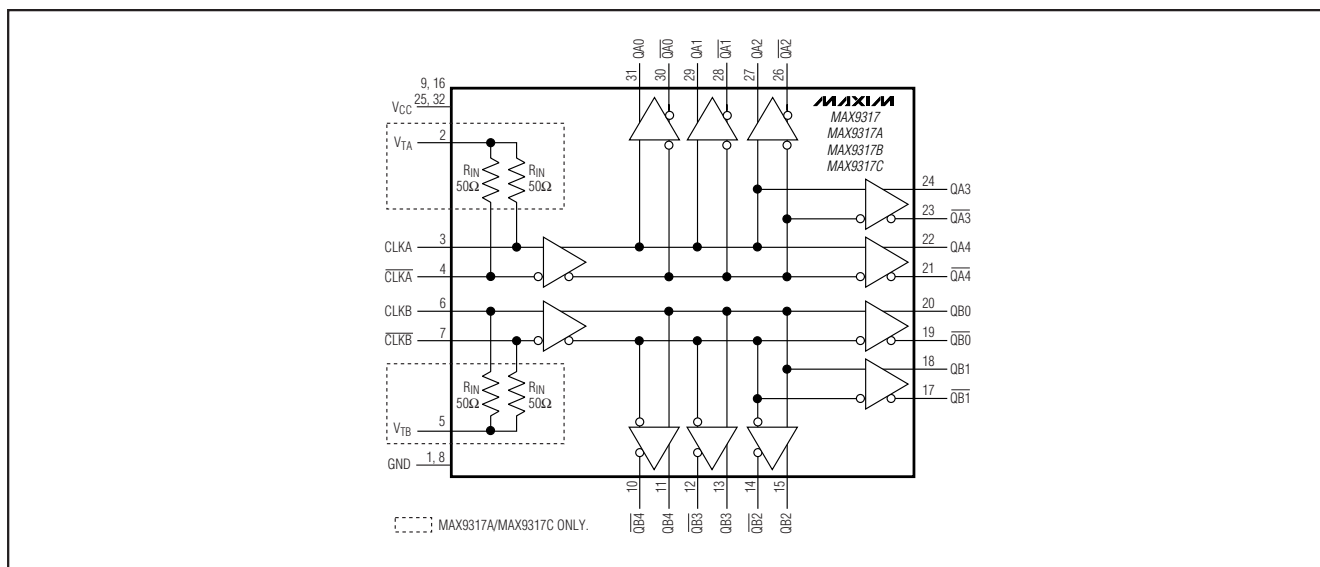

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX9317/MAX9317A/MAX9317B/MAX9317C

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

ABSOLUTE MAXIMUM RATINGS

V_{CC} to GND-0.3V to +4.1V
 Input Pins to GND.....-0.3V to (V_{CC} + 0.3V)
 Differential Input VoltageV_{CC} or 3.0V, whichever is less
 Continuous Output Current.....28mA
 Surge Output Current.....50mA
 Continuous Power Dissipation (T_A = +70°C)
 32-Pin, 7mm × 7mm TQFP
 (derate 20.7mW/°C above +70°C).....1.65W
 32-Pin 5mm × 5mm QFN
 (derate 21.3mW/°C above +70°C).....1.7W

Junction-to-Ambient Thermal Resistance in Still Air
 32-Pin, 7mm × 7mm TQFP.....+48.4°C/W
 32-Pin, 5mm × 5mm QFN+47°C/W
 Junction-to-Case Thermal Resistance
 32-Pin, 7mm × 7mm TQFP.....+12°C/W
 32-Pin, 5mm × 5mm QFN+2°C/W
 Operating Temperature Range-40°C to +85°C
 Junction Temperature+150°C
 Storage Temperature Range-65°C to +150°C
 ESD Protection
 Human Body Model (CLK₋, $\overline{\text{CLK}}_{-}$, Q₋, $\overline{\text{Q}}_{-}$, V_{T-})±2kV
 Soldering Temperature (10s).....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

(V_{CC} = 2.375V to 2.625V (MAX9317/MAX9317A), V_{CC} = 3.0V to 3.6V (MAX9317B/MAX9317C), all outputs loaded 100Ω ±1% between Q₋ and $\overline{\text{Q}}_{-}$, unless otherwise noted. Typical values are at V_{CC} = 2.5V (MAX9317/MAX9317A), V_{CC} = 3.3V (MAX9317B/MAX9317C), V_{IHD} = V_{CC} - 1.0V, V_{ILD} = V_{CC} - 1.5V, unless otherwise noted.) (Notes 1, 2, and 3)

| PARAMETER | SYMBOL | CONDITIONS | | -40°C | | | +25°C | | | +85°C | | | UNITS |
|--|-----------------------------------|---|--------------------|-------|-----------------------|-----|-------|-----------------------|-----|-------|-----------------------|-----|-------|
| | | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| INPUTS (CLK ₋ , $\overline{\text{CLK}}_{-}$) | | | | | | | | | | | | | |
| Differential Input High Voltage | V _{IHD} | Figure 1 | | 1.2 | V _{CC} | | 1.2 | V _{CC} | | 1.2 | V _{CC} | | V |
| Differential Input Low Voltage | V _{ILD} | Figure 1 | | 0 | V _{CC} - 0.1 | | 0 | V _{CC} - 0.1 | | 0 | V _{CC} - 0.1 | | V |
| Differential Input Voltage | V _{ID} | V _{IHD} - V _{ILD} | MAX9317/ MAX9317A | 0.1 | V _{CC} | | 0.1 | V _{CC} | | 0.1 | V _{CC} | | V |
| | | | MAX9317B/ MAX9317C | 0.1 | 3.0 | | 0.1 | 3.0 | | 0.1 | 3.0 | | |
| Input Current | I _{IH} , I _{IL} | CLK ₋ , or $\overline{\text{CLK}}_{-}$ = V _{IHD} or V _{ILD} , MAX9317/MAX9317B | | -60 | +60 | | -60 | +60 | | -60 | +60 | | μA |
| Input Termination Resistance | R _{IN} | MAX9317A/MAX9317C, Figure 2 (Note 4) | | 43 | 50 | 57 | 43 | 50 | 57 | 43 | 50 | 57 | Ω |
| OUTPUTS (Q ₋ , $\overline{\text{Q}}_{-}$) | | | | | | | | | | | | | |
| Output High Voltage | V _{OH} | Figure 1 | | 1.6 | | | 1.6 | | | 1.6 | | | V |
| Output Low Voltage | V _{OL} | Figure 1 | | 0.9 | | | 0.9 | | | 0.9 | | | V |

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

DC ELECTRICAL CHARACTERISTICS (continued)

($V_{CC} = 2.375V$ to $2.625V$ (MAX9317/MAX9317A), $V_{CC} = 3.0V$ to $3.6V$ (MAX9317B/MAX9317C), all outputs loaded $100\Omega \pm 1\%$ between Q_- and $\overline{Q_-}$, unless otherwise noted. Typical values are at $V_{CC} = 2.5V$ (MAX9317/MAX9317A), $V_{CC} = 3.3V$ (MAX9317B/MAX9317C), $V_{IHD} = V_{CC} - 1.0V$, $V_{ILD} = V_{CC} - 1.5V$, unless otherwise noted.) (Notes 1, 2, and 3)

| PARAMETER | SYMBOL | CONDITIONS | -40°C | | | +25°C | | | +85°C | | | UNITS |
|---|------------------|---|-------|------|-------|-------|------|-------|-------|------|-------|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| Differential Output Voltage | V _{OD} | Figure 1 | 250 | 350 | 450 | 250 | 350 | 450 | 250 | 350 | 450 | mV |
| Change in V _{OD} Between Complementary Output States | ΔV _{OD} | | | 7 | 50 | | 6 | 50 | | 6 | 50 | mV |
| Output Offset Voltage | V _{OS} | | 1.125 | 1.25 | 1.375 | 1.125 | 1.25 | 1.375 | 1.125 | 1.25 | 1.375 | V |
| Change in V _{OS} Between Complementary Output States | ΔV _{OS} | | | | 25 | | | 25 | | | 25 | mV |
| Output Short-Circuit Current | I _{OSC} | Q ₋ shorted to $\overline{Q_-}$ | | | 12 | | | 12 | | | 12 | mA |
| | | Q ₋ or $\overline{Q_-}$ shorted to GND | | | 28 | | | 28 | | | 28 | |
| POWER SUPPLY | | | | | | | | | | | | |
| Power-Supply Current (Note 5) | I _{CC} | MAX9317/9317A | | 69 | 107 | | 75 | 107 | | 80 | 107 | mA |
| | | MAX9317B/9317C | | 75 | 107 | | 81 | 107 | | 86 | 107 | |

AC ELECTRICAL CHARACTERISTICS

($V_{CC} = 2.375V$ to $2.625V$ (MAX9317/MAX9317A) or $V_{CC} = 3.0V$ to $3.6V$ (MAX9317B/MAX9317C), all outputs loaded with $100\Omega \pm 1\%$, between Q_- and $\overline{Q_-}$, $f_{IN} \leq 1.0GHz$, input transition time = 125ps (20% to 80%), $V_{IHD} - V_{ILD} = 0.15V$ to V_{CC} , unless otherwise noted. Typical values are at $V_{CC} = 2.5V$ (MAX9317/MAX9317A), $V_{CC} = 3.3V$ (MAX9317B/MAX9317C), $f_{IN} = 1.0GHz$, $V_{IHD} = V_{CC} - 1.0V$, $V_{ILD} = V_{CC} - 1.5V$, unless otherwise noted.) (Notes 1 and 4)

| PARAMETER | SYMBOL | CONDITIONS | -40°C | | | +25°C | | | +85°C | | | UNITS |
|--|------------------------|--|-------|-----|-----|-------|-----|-----|-------|-----|-----|---------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| Propagation Delay CLK_- , $\overline{CLK_-}$ to Q_- , $\overline{Q_-}$ | t_{PHL} t_{PLH} | Figure 1 | 250 | 310 | 600 | 250 | 330 | 600 | 250 | 335 | 600 | ps |
| Output-to-Output Skew | t_{SKEW1} | (Note 6) | | 9 | 55 | | 5 | 45 | | 4 | 25 | ps |
| Part-to-Part Skew | t_{SKEW2} | (Note 7) | | | 145 | | | 145 | | | 145 | ps |
| Added Random Jitter | t_{RJ} | $f_{IN} = 1.0GHz$, clock pattern (Note 8) | | 0.8 | 2.0 | | 0.8 | 2.0 | | 0.8 | 2.0 | ps(RMS) |
| Added Deterministic Jitter | t_{DJ} | $f_{IN} = 1.0GHz$, $2^{23} - 1$ PRBS pattern (Note 8) | | 80 | 105 | | 80 | 105 | | 80 | 105 | ps(P-P) |
| Operating Frequency | f_{MAX} | $V_{OD} \geq 250mV$ | 1.0 | | | 1.0 | | | 1.0 | | | GHz |

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

AC ELECTRICAL CHARACTERISTICS (continued)


($V_{CC} = 2.375V$ to $2.625V$ (MAX9317/MAX9317A) or $V_{CC} = 3.0V$ to $3.6V$ (MAX9317B/MAX9317C), all outputs loaded with $100\Omega \pm 1\%$, between Q_- and $\overline{Q_-}$, $f_{IN} \leq 1.0GHz$, input transition time = 125ps (20% to 80%), $V_{IHD} - V_{ILD} = 0.15V$ to V_{CC} , unless otherwise noted. Typical values are at $V_{CC} = 2.5V$ (MAX9317/MAX9317A), $V_{CC} = 3.3V$ (MAX9317B/MAX9317C), $f_{IN} = 1.0GHz$, $V_{IHD} = V_{CC} - 1.0V$, $V_{ILD} = V_{CC} - 1.5V$, unless otherwise noted.) (Notes 1 and 4)

| PARAMETER | SYMBOL | CONDITIONS | -40°C | | | +25°C | | | +85°C | | | UNITS |
|------------------------------------|-----------|----------------------|-------|-----|-----|-------|-----|-----|-------|-----|-----|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | MIN | TYP | MAX | |
| Differential Output Rise/Fall Time | t_R/t_F | 20% to 80%, Figure 1 | 140 | 200 | 300 | 140 | 205 | 300 | 140 | 205 | 300 | ps |

- Note 1:** Measurements are made with the device in thermal equilibrium.
- Note 2:** Current into a pin is defined as positive. Current out of a pin is defined as negative.
- Note 3:** DC parameters are production tested at +25°C. DC limits are guaranteed by design and characterization over the full operating temperature range.
- Note 4:** Guaranteed by design and characterization, and are not production tested. Limits are set to ± 6 sigma.
- Note 5:** All outputs loaded with 100Ω differential, all inputs biased differential high or low except V_{T-} .
- Note 6:** Measured between outputs of the same device at the signal crossing points for a same-edge transition.
- Note 7:** Measured between outputs on different devices for identical transitions and V_{CC} levels.
- Note 8:** Device jitter added to the input signal.

Typical Operating Characteristics

(MAX9317, $V_{CC} = 2.5V$, all outputs loaded with $100\Omega \pm 1\%$, between Q_- and $\overline{Q_-}$, $f_{IN} = 1.0GHz$, input transition time = 125ps (20% to 80%), $V_{IHD} = V_{CC} - 1.0V$, $V_{ILD} = V_{CC} - 1.5V$, unless otherwise noted.)

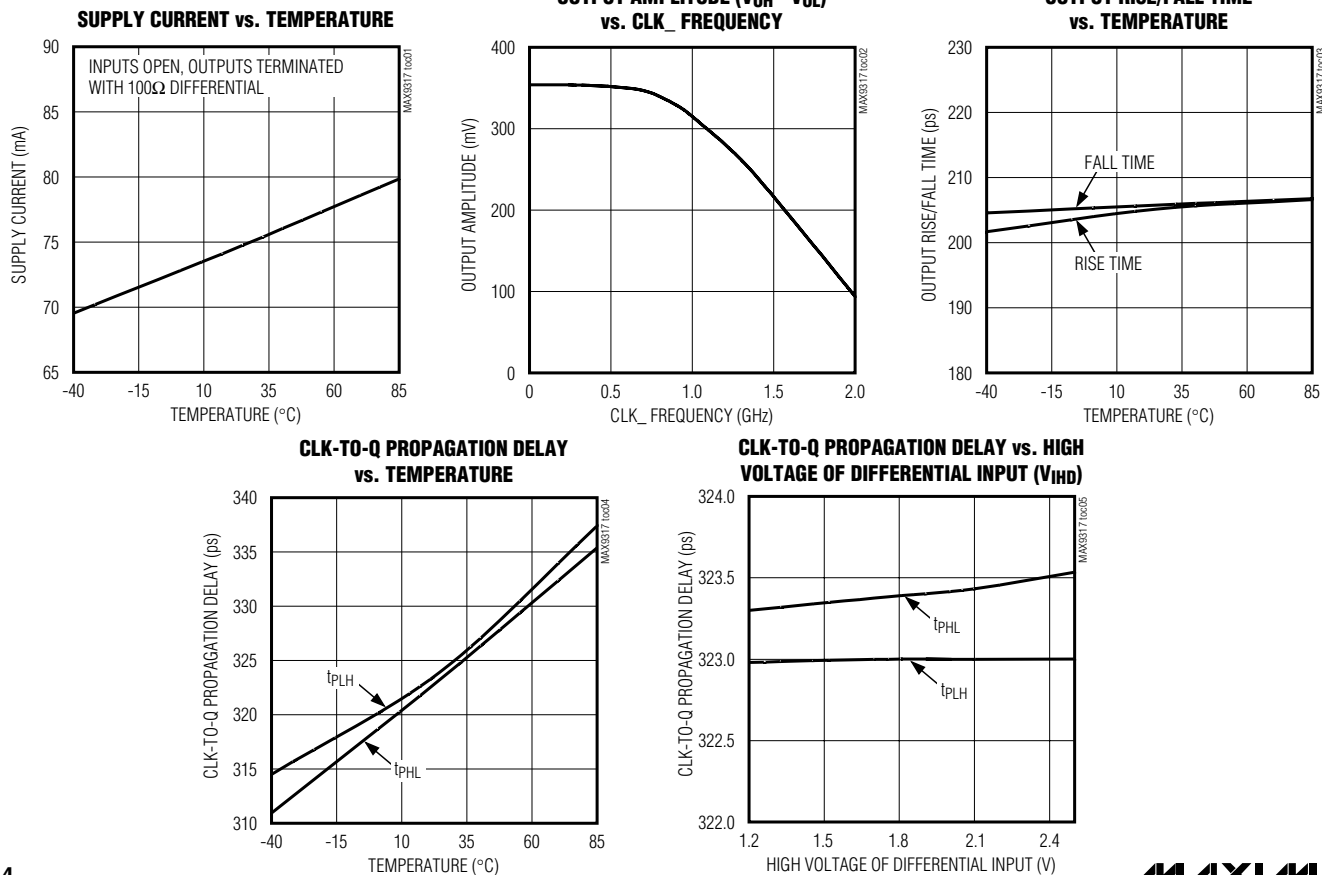

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

Pin Description

| PIN | NAME | | FUNCTION |
|------------------|------------------------------------|------------------------------------|---|
| | MAX9317 MAX9317B | MAX9317A MAX9317C | |
| 1, 8 | GND | GND | Ground |
| 2 | N.C. | — | No Connection. Connect this pin to ground or leave floating. |
| | — | V _{TA} | CLKA Input Termination Voltage. This pin is connected to CLK _A and $\overline{\text{CLK}}_{\text{A}}$ through 50Ω termination resistors. Connect this pin to V _{CC} - 2V for an LVPECL input signal on CLK _A or leave floating for an LVDS input signal. |
| 3 | CLKA | CLKA | Noninverting Differential Clock Input A |
| 4 | $\overline{\text{CLK}}_{\text{A}}$ | $\overline{\text{CLK}}_{\text{A}}$ | Inverting Differential Clock Input A |
| 5 | N.C. | — | No Connection. Connect this pin to ground or leave floating. |
| | — | V _{TB} | CLKB Input Termination Voltage. This pin is connected to CLK _B and $\overline{\text{CLK}}_{\text{B}}$ through 50Ω termination resistors. Connect this pin to V _{CC} - 2V for an LVPECL input signal on CLK _B or leave floating for an LVDS input signal. |
| 6 | CLKB | CLKB | Noninverting Differential Clock Input B |
| 7 | $\overline{\text{CLK}}_{\text{B}}$ | $\overline{\text{CLK}}_{\text{B}}$ | Inverting Differential Clock Input B |
| 9, 16, 25, 32 | V _{CC} | V _{CC} | Positive Supply Voltage. Bypass each V _{CC} pin to ground with 0.1μF and 0.01μF ceramic capacitors. Place the capacitors as close to the device as possible with the 0.01μF capacitor closest to the device. |
| 10 | $\overline{\text{QB}}_4$ | $\overline{\text{QB}}_4$ | CLKB Inverting Differential Output 4. Terminate with 100Ω to QB ₄ . |
| 11 | QB ₄ | QB ₄ | CLKB Noninverting Differential Output 4. Terminate with 100Ω to $\overline{\text{QB}}_4$. |
| 12 | $\overline{\text{QB}}_3$ | $\overline{\text{QB}}_3$ | CLKB Inverting Differential Output 3. Terminate with 100Ω to QB ₃ . |
| 13 | QB ₃ | QB ₃ | CLKB Noninverting Differential Output 3. Terminate with 100Ω to $\overline{\text{QB}}_3$. |
| 14 | $\overline{\text{QB}}_2$ | $\overline{\text{QB}}_2$ | CLKB Inverting Differential Output 2. Terminate with 100Ω to QB ₂ . |
| 15 | QB ₂ | QB ₂ | CLKB Noninverting Differential Output 2. Terminate with 100Ω to $\overline{\text{QB}}_2$. |
| 17 | $\overline{\text{QB}}_1$ | $\overline{\text{QB}}_1$ | CLKB Inverting Differential Output 1. Terminate with 100Ω to QB ₁ . |
| 18 | QB ₁ | QB ₁ | CLKB Noninverting Differential Output 1. Terminate with 100Ω to $\overline{\text{QB}}_1$. |
| 19 | $\overline{\text{QB}}_0$ | $\overline{\text{QB}}_0$ | CLKB Inverting Differential Output 0. Terminate with 100Ω to QB ₀ . |
| 20 | QB ₀ | QB ₀ | CLKB Noninverting Differential Output 0. Terminate with 100Ω to $\overline{\text{QB}}_0$. |
| 21 | $\overline{\text{QA}}_4$ | $\overline{\text{QA}}_4$ | CLKA Inverting Differential Output 4. Terminate with 100Ω to QA ₄ . |
| 22 | QA ₄ | QA ₄ | CLKA Noninverting Differential Output 4. Terminate with 100Ω to $\overline{\text{QA}}_4$. |
| 23 | $\overline{\text{QA}}_3$ | $\overline{\text{QA}}_3$ | CLKA Inverting Differential Output 3. Terminate with 100Ω to QA ₃ . |
| 24 | QA ₃ | QA ₃ | CLKA Noninverting Differential Output 3. Terminate with 100Ω to $\overline{\text{QA}}_3$. |
| 26 | $\overline{\text{QA}}_2$ | $\overline{\text{QA}}_2$ | CLKA Inverting Differential Output 2. Terminate with 100Ω to QA ₂ . |
| 27 | QA ₂ | QA ₂ | CLKA Noninverting Differential Output 2. Terminate with 100Ω to $\overline{\text{QA}}_2$. |
| 28 | $\overline{\text{QA}}_1$ | $\overline{\text{QA}}_1$ | CLKA Inverting Differential Output 1. Terminate with 100Ω to QA ₁ . |
| 29 | QA ₁ | QA ₁ | CLKA Noninverting Differential Output 1. Terminate with 100Ω to $\overline{\text{QA}}_1$. |
| 30 | $\overline{\text{QA}}_0$ | $\overline{\text{QA}}_0$ | CLKA Inverting Differential Output 0. Terminate with 100Ω to QA ₀ . |
| 31 | QA ₀ | QA ₀ | CLKA Noninverting Differential Output 0. Terminate with 100Ω to $\overline{\text{QA}}_0$. |
| — | EP | EP | Exposed Pad. QFN package only. Internally connected to ground. |

MAX9317/MAX9317A/MAX9317B/MAX9317C

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

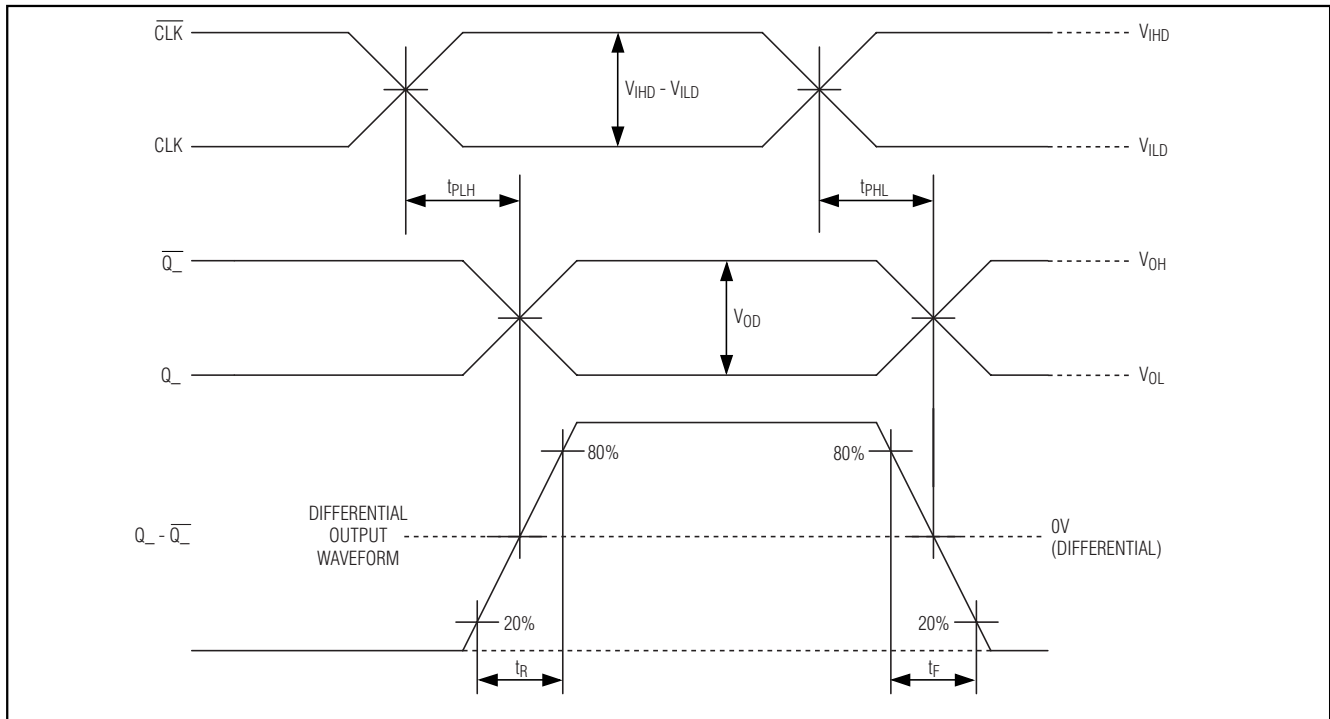


Figure 1. MAX9317 Timing Diagram

Detailed Description

The MAX9317 family of low-skew, 1-to-5 dual differential drivers are designed for clock or data distribution. Two independent 1-to-5 splitters accept a differential input signal and reproduce it on five separate differential LVDS outputs. The output drivers are guaranteed to operate at frequencies up to 1.0GHz with the LVDS output levels conforming to the EIA/TIA-644 standard.

The MAX9317/MAX9317A operate from a 2.375V to 2.625V power supply for use in 2.5V systems. The MAX9317B/MAX9317C operate from a 3.0V to 3.6V supply for 3.3V systems.

Differential LVPECL and LVDS Input

The MAX9317 family has two input differential pairs: CLKA and $\overline{\text{CLKA}}$, and CLKB and $\overline{\text{CLKB}}$. Each differential input pair can be configured or terminated independently. The inputs are designed to be driven by either LVPECL or LVDS signals with a maximum differential voltage of V_{CC} or 3.0V, whichever is less.

The MAX9317A/MAX9317C reduce external component count by having the input 50Ω termination resistors on chip. Configure the MAX9317A/MAX9317C to receive LVPECL signals by connecting V_{T-} to $V_{CC} - 2V$ (Figure 2(a)). Leaving the V_{T-} input floating configures the

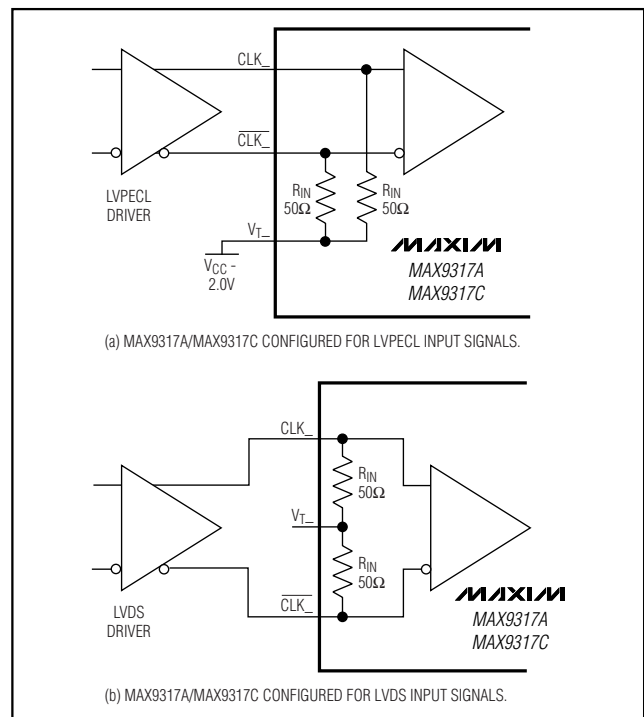


Figure 2. MAX9317A/MAX9317C Input Terminations

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

respective input with a differential 100Ω termination to receive LVDS signals (Figure 2(b)).

The MAX9317/MAX9317B accept LVPECL if the inputs are externally terminated with 50Ω resistors from CLK_A and $\overline{\text{CLKA}}$ or CLK_B and $\overline{\text{CLKB}}$ to V_{CC} - 2V. Alternatively, if the inputs are differentially terminated with 100Ω, they accept an LVDS input signal.

The LVDS input signal must adhere to the specifications given in the *Electrical Characteristics* table. Note that the signal must be at least 1.2V to be a valid logic HIGH.

Applications Information

Output Termination

Terminate the outputs with 100Ω across each differential pair (Q₋ to $\overline{\text{Q}}_{-}$). Ensure that output currents do not exceed the current limits as specified in the *Absolute Maximum Ratings* table. Under all operating conditions, observe the device's total thermal limits.

Power-Supply Bypassing

Bypass each V_{CC} pin to ground with high-frequency surface-mount ceramic 0.1μF and 0.01μF capacitors in parallel and as close to the device as possible, with the 0.01μF capacitor closest to the device. Use multiple parallel vias to minimize parasitic inductance and reduce power-supply bounce with high-current transients.

Circuit Board Traces

Circuit board trace layout is very important to maintain the signal integrity of high-speed differential signals. Use 50Ω traces for CLK₋, $\overline{\text{CLK}}_{-}, Q₋, and $\overline{\text{Q}}_{-}$. Maintaining integrity is accomplished in part by reducing signal reflections and skew, and increasing common-mode noise immunity by keeping the differential traces close together.$


Signal reflections are caused by discontinuities in the 50Ω characteristic impedance of the traces. Avoid discontinuities by maintaining the distance between differential traces, and not using sharp corners or vias. Maintaining distance between the traces also increases common-mode noise immunity. Reducing signal skew is accomplished by matching the electrical length of the differential traces.

Chip Information

TRANSISTOR COUNT: 1119

PROCESS: Bipolar


Pin Configurations

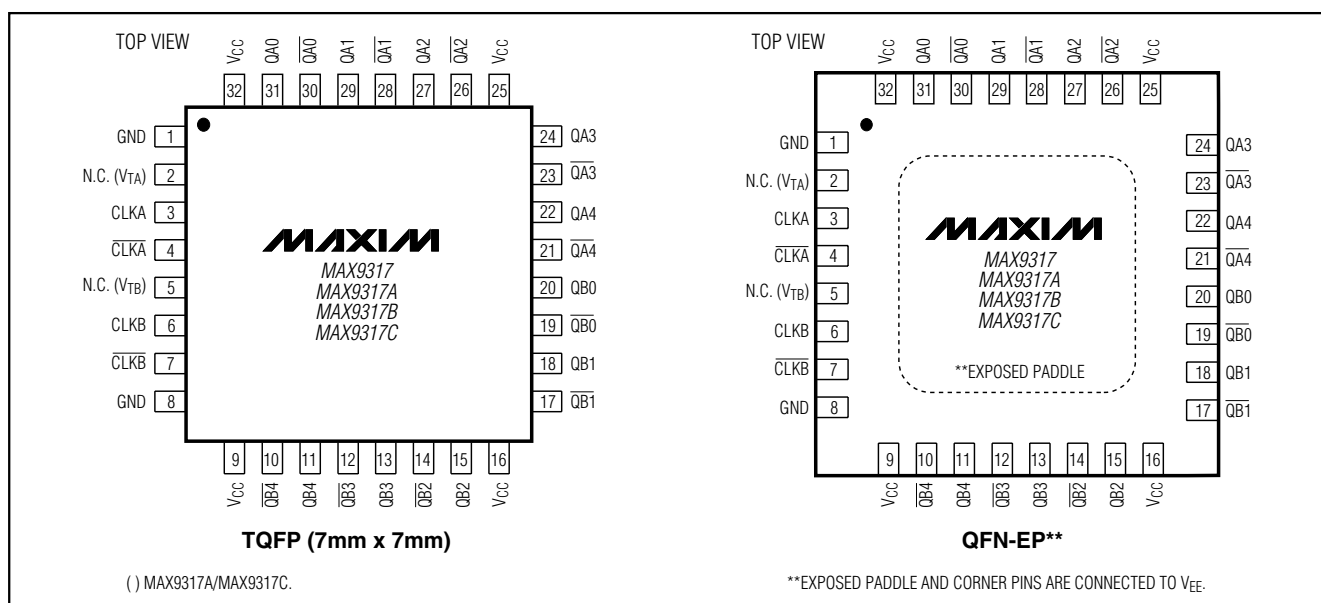

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

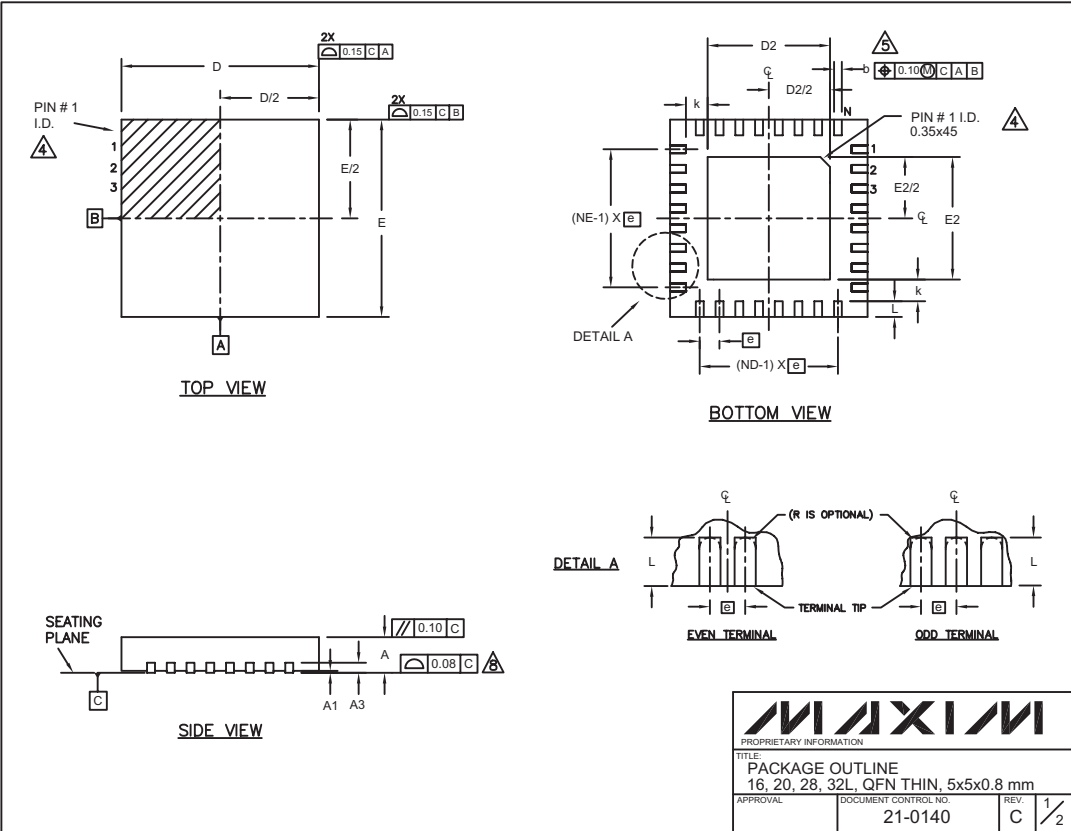

QFN THIN 5x5x0.8 .EPS

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

Package Information (continued)


(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

| COMMON DIMENSIONS | | | | | | | | | | | | |
|-------------------|-----------|------|------|-----------|------|------|-----------|------|------|-----------|------|------|
| PKG. | 16L 5x5 | | | 20L 5x5 | | | 28L 5x5 | | | 32L 5x5 | | |
| SYMBOL | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| A | 0.70 | 0.75 | 0.80 | 0.70 | 0.75 | 0.80 | 0.70 | 0.75 | 0.80 | 0.70 | 0.75 | 0.80 |
| A1 | 0 | 0.02 | 0.05 | 0 | 0.02 | 0.05 | 0 | 0.02 | 0.05 | 0 | 0.02 | 0.05 |
| A3 | 0.20 REF. | | | 0.20 REF. | | | 0.20 REF. | | | 0.20 REF. | | |
| b | 0.25 | 0.30 | 0.35 | 0.25 | 0.30 | 0.35 | 0.20 | 0.25 | 0.30 | 0.20 | 0.25 | 0.30 |
| D | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 |
| E | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 | 4.90 | 5.00 | 5.10 |
| e | 0.80 BSC. | | | 0.65 BSC. | | | 0.50 BSC. | | | 0.50 BSC. | | |
| k | 0.25 | - | - | 0.25 | - | - | 0.25 | - | - | 0.25 | - | - |
| L | 0.45 | 0.55 | 0.65 | 0.45 | 0.55 | 0.65 | 0.45 | 0.55 | 0.65 | 0.30 | 0.40 | 0.50 |
| N | 16 | | | 20 | | | 28 | | | 32 | | |
| ND | 4 | | | 5 | | | 7 | | | 8 | | |
| NE | 4 | | | 5 | | | 7 | | | 8 | | |
| JEDEC | WHHB | | | WHHC | | | WHHD-1 | | | WHHD-2 | | |

| EXPOSED PAD VARIATIONS | | | | | | |
|------------------------|------|------|------|------|------|------|
| PKG. CODES | D2 | | | E2 | | |
| | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |
| T1655-1 | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T2055-2 | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |
| T2855-1 | 3.15 | 3.25 | 3.35 | 3.15 | 3.25 | 3.35 |
| T2855-2 | 2.60 | 2.70 | 2.80 | 2.60 | 2.70 | 2.80 |
| T3255-2 | 3.00 | 3.10 | 3.20 | 3.00 | 3.10 | 3.20 |

NOTES:

- DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
- ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
- N IS THE TOTAL NUMBER OF TERMINALS.
- THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
- DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.25 mm AND 0.30 mm FROM TERMINAL TIP.
- ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
- DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
- COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
- DRAWING CONFORMS TO JEDEC MO220.
- WARPAGE SHALL NOT EXCEED 0.10 mm.




| | | | |
|---|----------------------|------|-----|
|  | | | |
| PROPRIETARY INFORMATION | | | |
| TITLE: PACKAGE OUTLINE | | | |
| 16, 20, 28, 32L, QFN THIN, 5x5x0.8 mm | | | |
| APPROVAL | DOCUMENT CONTROL NO. | REV. | 2/2 |
| | 21-0140 | C | |

MAX9317/MAX9317A/MAX9317B/MAX9317C

Dual 1:5 Differential Clock Drivers with LVPECL Inputs and LVDS Outputs

Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

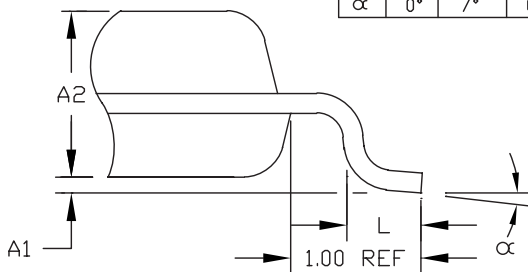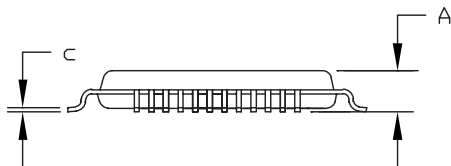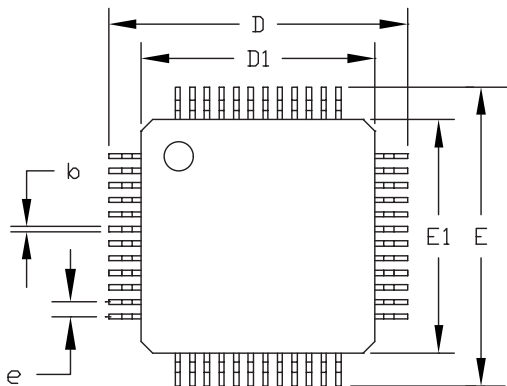

| JEDEC VARIATION | | | | |
|-----------------|---------|------|---------|------|
| | BC | | BE | |
| | 32 LEAD | | 48 LEAD | |
| | MIN. | MAX. | MIN. | MAX. |
| A | --- | 1.60 | --- | 1.60 |
| A1 | 0.05 | 0.15 | 0.05 | 0.15 |
| A2 | 1.35 | 1.45 | 1.35 | 1.45 |
| D | 8.90 | 9.10 | 8.90 | 9.10 |
| D1 | 7.00 | BSC. | 7.00 | BSC. |
| E | 8.90 | 9.10 | 8.90 | 9.10 |
| E1 | 7.00 | BSC. | 7.00 | BSC. |
| e | 0.8 | BSC. | 0.5 | BSC. |
| L | 0.45 | 0.75 | 0.45 | 0.75 |
| b | 0.30 | 0.45 | 0.17 | 0.27 |
| c | 0.09 | 0.20 | 0.09 | 0.20 |
| α | 0° | 7° | 0° | 7° |

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5-1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MD-136, VARIATIONS BC AND BE.
4. LEADS SHALL BE COPLANAR WITHIN .004 INCH.

| MAXIM | | | |
|---|----------------------|-----|-----|
| PROPRIETARY INFORMATION | | | |
| TITLE: PACKAGE OUTLINE, 32/48L, 7x7x1.4 MM TQFP | | | |
| APPROVAL | DOCUMENT CONTROL NO. | REV | 1/1 |
| | 21-0054 | D | |

32L/48L TQFP EP5

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

10 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2002 Maxim Integrated Products

Printed USA

MAXIM is a registered trademark of Maxim Integrated Products.