

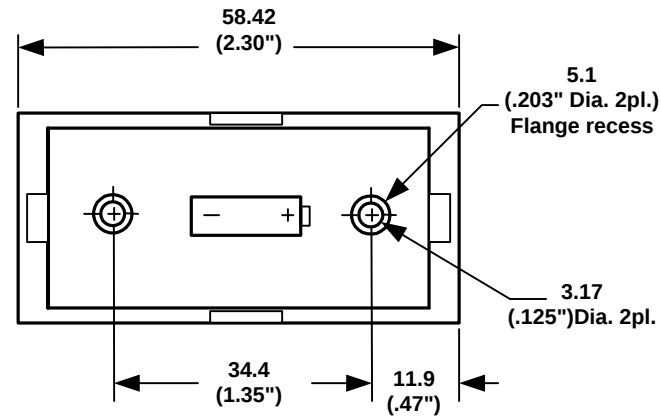
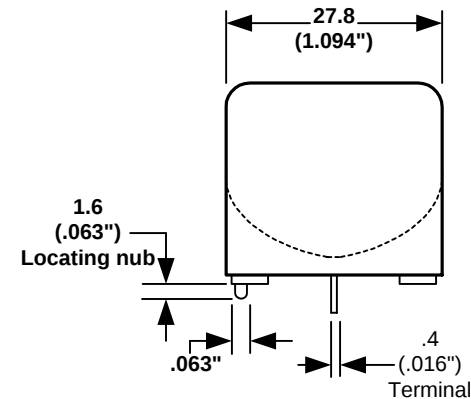


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
04/26/03	A	Material was Self extinguishing thermoplastic, PBT, black	T.B.		
05/21/05	B	Updated Specifications	T.B.	B.S.	

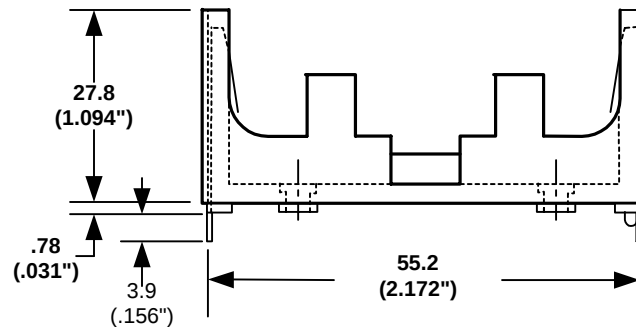

Standard Pc Version P.C. Board Hole layout

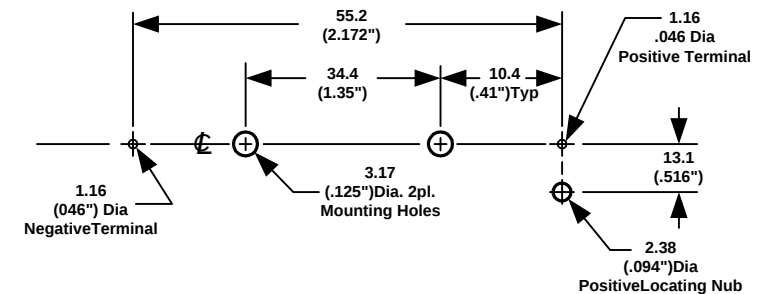

SPECIFICATIONS

Material:

Holder
Flammability Rating
Dielectric Strength
Temperature Range
Resistance to Solvent

Nylon 6/6 , Black
UL94 V-0, File No. E44716
560 volts/ mil at 25° C for 5 sec.
-55° C to +180° C.
Xylene, Ethyl, Butyl, Methyl, Propyl alcohol,
Ethyl acetate, Refrigerants, Heptane & Toluene.
302 Spring Tempered Stainless Steel Nickel Plated
20 Grams

Contacts
Weight

NOTE:

Eyelet Stimpson Style # A1883 .110"OD. x .190"flange
Flange recess .203" Dia. X .090" deep
Accepts standard 2-56 machine screws

Accessories:

BI - UM - 1 - 2 Insulator

Note: Dimensions in mm. (inches)

TOLERANCES (EXCEPT AS NOTED)	 Memory Protection Devices, Inc. 200 Broad Hollow Road, Farmingdale, New York 11735		
DECIMAL + .5 (.020) - .5 (.020)	SCALE		DRAWN BY S.C.
FRACTIONAL + .8 (.030) - .8 (.030)	TITLE		APPROVED BY
ANGULAR + 3° - 3°	DATE	DRAWING NUMBER	
	05/21/05	BHC	