

RECTIFIERS

High Efficiency, 50A and 70A

UES801 BYW78-50
UES802 BYW78-100
UES803 BYW78-150

FEATURES

- High Continuous Current Rating
- Very Low Forward Voltage
- Very Fast Switching Speeds
- High Surge Capability
- Low Thermal Resistance
- Mechanically Rugged DO-5 Package

DESCRIPTION

This Series is specifically designed for operation in power switching circuits operating at frequencies of at least 20KHz. The very low forward voltage and very fast recovery time make them particularly suited for switching type power supplies.

ABSOLUTE MAXIMUM RATINGS

	UES801	UES802	UES803	BYW78-50	BYW78-100	BYW78-150
Peak Inverse Voltage, V_R	50V	100V	150V	50V	100V	150V
Repetitive Peak Inverse Voltage, V_{RRM}	50V	100V	150V	50V	100V	150V
Non-Repetitive Peak Inverse Voltage, V_{RSM}	50V	100V	150V	50V	100V	150V
Maximum Average D.C. Output Current, I_o @ $T_c = 100^\circ\text{C}$	70A	70A	70A	50A	50A	50A
Non-Repetitive Sinusoidal Surge Current (8.3ms), I_{FSM}	800A	800A	800A	1500A	1500A	1500A
Thermal Resistance, Junction to Case, $R_{\theta JC}$	0.8°C/W					
Storage Temperature Range, T_{STG}	-55°C to +175°C					
Maximum Operating Junction Temperature, $T_{J MAX}$	+175°C					


ELECTRICAL SPECIFICATIONS

Type	Maximum Reverse Voltage V_R	Maximum Forward Voltage V_F		Maximum Reverse Current I_R		Maximum Reverse Recovery Time t_{RR}
UES801 UES802 UES803	50V 100V 150V	$T_c = 25^\circ\text{C}$	$T_c = 150^\circ\text{C}$	$T_c = 25^\circ\text{C}$	$T_c = 150^\circ\text{C}$	50ns ⁽¹⁾
		0.9/5V @ $I_F = 70\text{A}$	0.84V @ $I_F = 70\text{A}$	25μA @ Rated V_R	30mA @ Rated V_R	
BYW78-50 BYW78-100 BYW78-150	50V 100V 150V	$T_c = 25^\circ\text{C}$	$T_c = 100^\circ\text{C}$	$T_c = 25^\circ\text{C}$	$T_c = 100^\circ\text{C}$	60ns ⁽²⁾
		1.1V @ $I_F = 160\text{A}$	0.85V @ $I_F = 50\text{A}$	50μA @ Rated V_R	5mA @ Rated V_R	

(1) Measured in circuit $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $I_{REC} = 0.25\text{A}$


(2) Measured in circuit $I_F = 1\text{A}$, $V_R = 30\text{V}$, $dI_F/dt = 50\text{A}/\mu\text{s}$

MECHANICAL SPECIFICATIONS

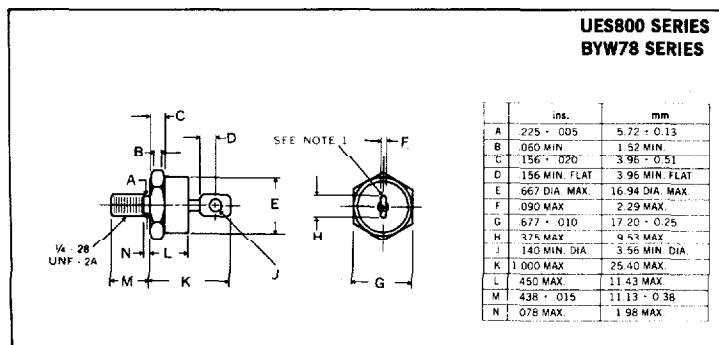


Notes:

1. Standard polarity is cathode-to-stud
2. All metal surfaces tin plated.
3. Maximum unlubricated stud torque: 20 inch pounds (20 kg. cm).
4. Angular orientation of terminal is undefined.




Microsemi Corp.
Watertown
The diode experts


Output Current vs. Case Temperature




Forward Current vs. Forward Voltage

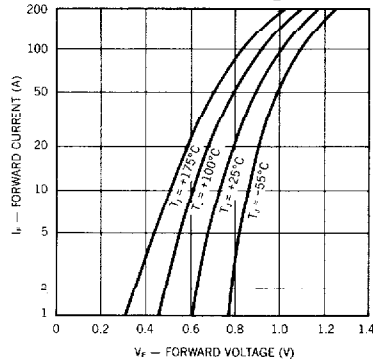


Peak Output Current vs. Case Temperature

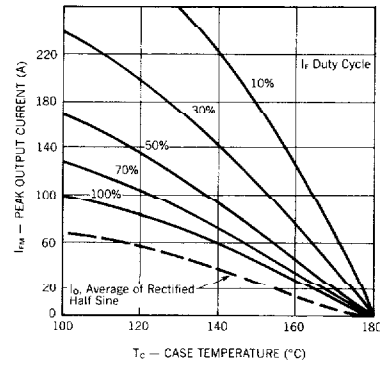


Maximum Forward Surge vs. Number of Cycles

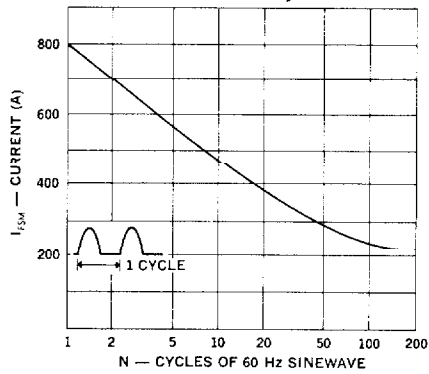


Typical Reverse Current vs. Reverse Voltage

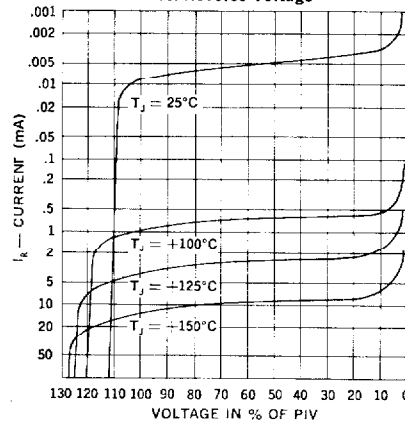

Thermal Impedance vs. Pulse Width

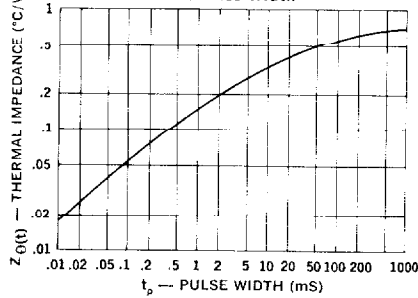

Reverse-Recovery Circuit

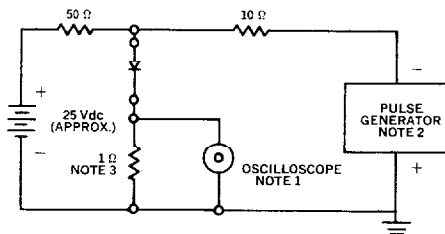

NOTES:

1. Oscilloscope: Rise time ≤ 3 ns; input impedance $\approx 50\Omega$.
2. Pulse Generator: Rise time ≤ 8 ns; source impedance 10Ω .
3. Current viewing resistor, non-inductive, coaxial recommended.